



RoHS Compliant
 2002/95/EC
 Process Capable


REV.	ECN. NO.	APPD.

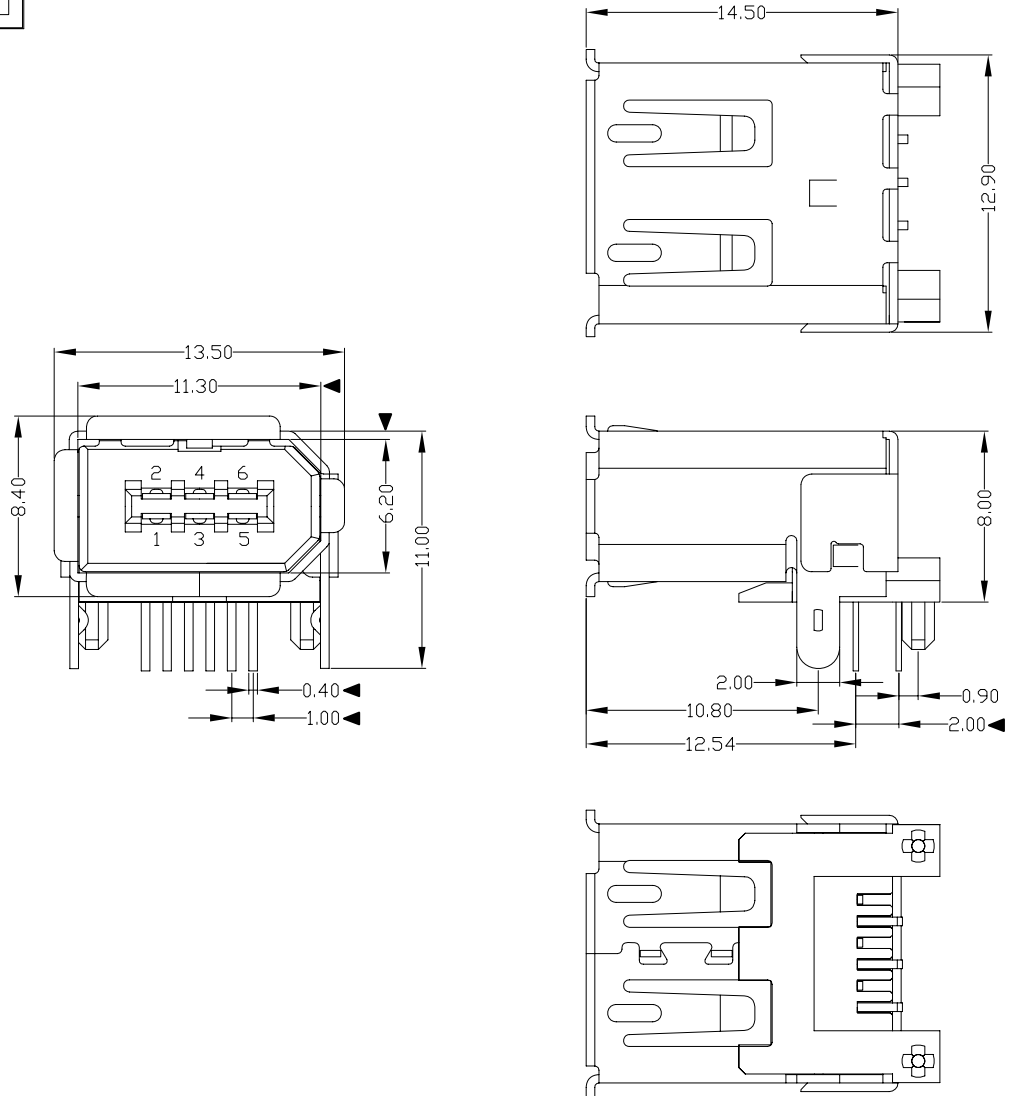

NOTES:
 1. ELECTRICAL:
 1) VOLTAGE CURRENT RATING: 1AMP,30V AC;
 2) INSULATION RESISTANCE: 100MΩ MIN;
 3) CONTACT RESISTANCE: 50mΩ MAX;
 4) WITHSTANDING VOLTAGE: 300V AC;
 5) OPERATING TEMPERATURE: -55°C TO +85°C.
 2. Mechanical:
 1) Mating Force: 30N MAX
 2) Unmating Force: 7N MIN.
 3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
IENF-06*N-4*R80
 W:WHITE
 B:BLACK
 1:Au 1U*
 6:Au 30U*
 1:PBT
 2:PA6T
 3:PA9T
 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS			
3	HOUSING	LCP	1	UL94V-0	X. ±0.35	X.* ±2*	mm	东莞市腾兴电子有限公司 TITLE: IEEE 1394 6P/F DIP PART NO.: IENF-06*N-4*R80 DR: gan 2012/07/02 DWG NO.: AII-R80 CHKD: gan 2012/07/02 APPD:
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X* ±1*	MAT'L	
1	TERMINAL	COPPER ALLOY	6	PLATED GOLD/TIN	.XX ±0.25	.XX*	SEE NOTE	
					.XXX ±0.15	.XXX*	FINISH	
					<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNDTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNDTECH INC.</small>			Q'TY 
								SCALE: 1:1 SHEET: 1/1 REV.: B CUSTOMER DRAWING