




RoHS
Compliant
2002/95/EC

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
| | | | |
| | | | |
| | | | |

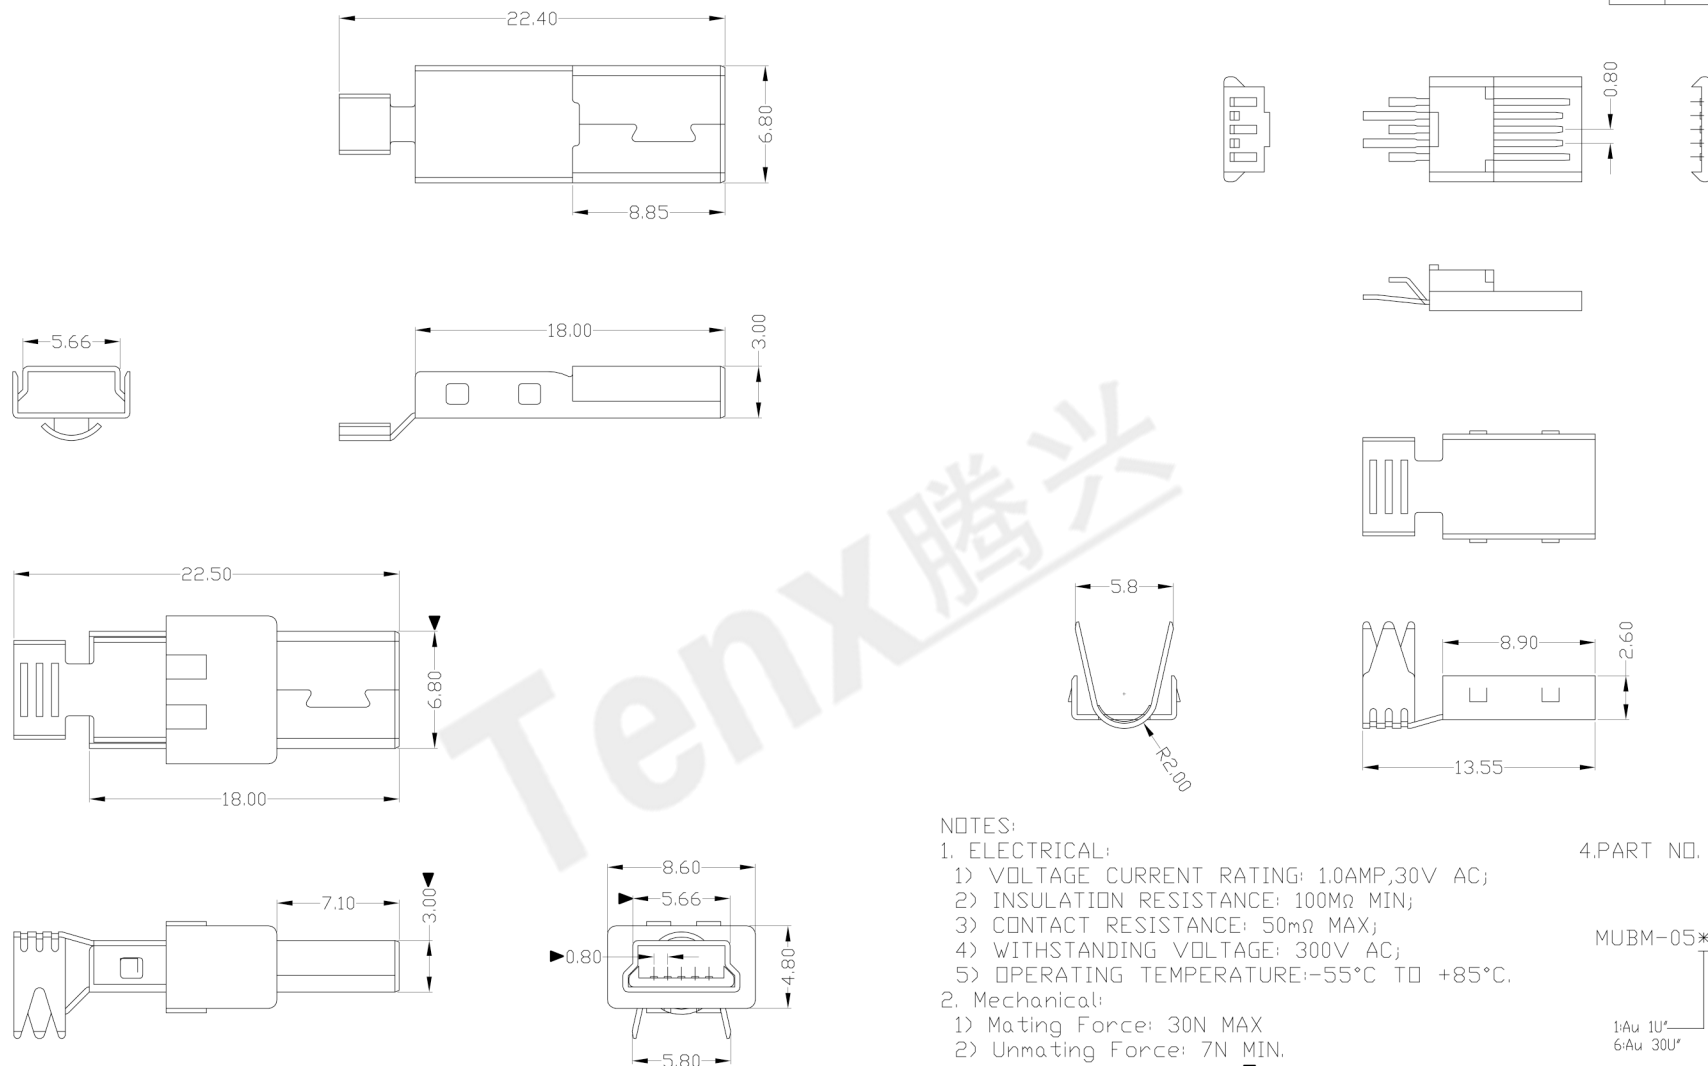

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
- 2) INSULATION RESISTANCE: 100MΩ MIN;
- 3) CONTACT RESISTANCE: 50mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 300V AC;
- 5) OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 30N MAX
- 2) Unmating Force: 7N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUBM-05*N-4BS86

1:1Au 1U*
6:1Au 30U*

W:WHITE
B:BLACK
1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

| NO | PARTS | MATERIAL | QTY | FINISHING |
|----|------------|--------------|-----|-----------------|
| 4 | HOUSING | LCP | 1 | UL94V-0 |
| 3 | UP SHELL | SPCC | 1 | PLATED NICKEL |
| 2 | DOWN SHELL | SPCC | 1 | PLATED NICKEL |
| 1 | TERMINAL | COPPER ALLOY | 5 | PLATED GOLD/TIN |

| X. | X.* ±0.35 | X.* ±2* | UNITS | mm |
|------|-----------|---------|----------|----|
| .X | ±0.3 | ±1* | MAT'L | |
| .XX | ±0.25 | ±XX* | SEE NOTE | |
| .XXX | ±0.15 | ±XXX* | FINISH | |
| | | | SEE NOTE | |
| | | | Q'TY | |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.

| | | | |
|--|--|------------------------------|------------------|
| 东莞市腾兴电子有限公司 | | | |
| TITLE: MINI USB 5P/M超薄B型前五后五 (焊线式 四件套) | | PART NO.: MUBM-05*N-4BS86 | |
| DR: gan 2012/07/03 | | DWG NO.: AII-S86 | |
| CHKD: gan 2012/07/03 | | SCALE | SHEET |
| APPD: | | 1:1 | 1/1 |
| | | REV. | CUSTOMER DRAWING |
| | | B | |