


5F Series

Sub-Miniature Slide Switches

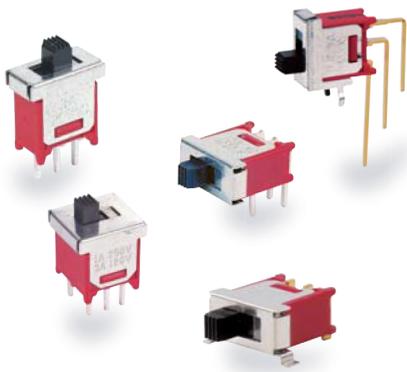

SPECIFICATIONS

CONTACT RATING: Dependent upon contact material See Page 89.

MECHANICAL LIFE: 30,000 make-and-break cycles.

CONTACT RESISTANCE: 20 mΩ max. initial @ 2-4VDC
100mA for both silver and gold plated contacts.

INSULATION RESISTANCE: 1,000 MΩ min.

DIELECTRIC STRENGTH: 1,000 Vrms min.@sea level.

OPERATING TEMPERATURE: -40°C to 85°C.(std)
-30°C to 85°C.(SMT)

MATERIALS

CASE: Diallyl phthalate (DAP) (UL94v-0).

HOUSING: Stainless steel or phosphor bronze,tin plated.

ACTUATOR: Nylon,black std.

CONTACT: Brass or copper alloy,with silver or gold plated.

TERMINALS: Copper alloy,with silver and gold plated.



HOW TO ORDER

