




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

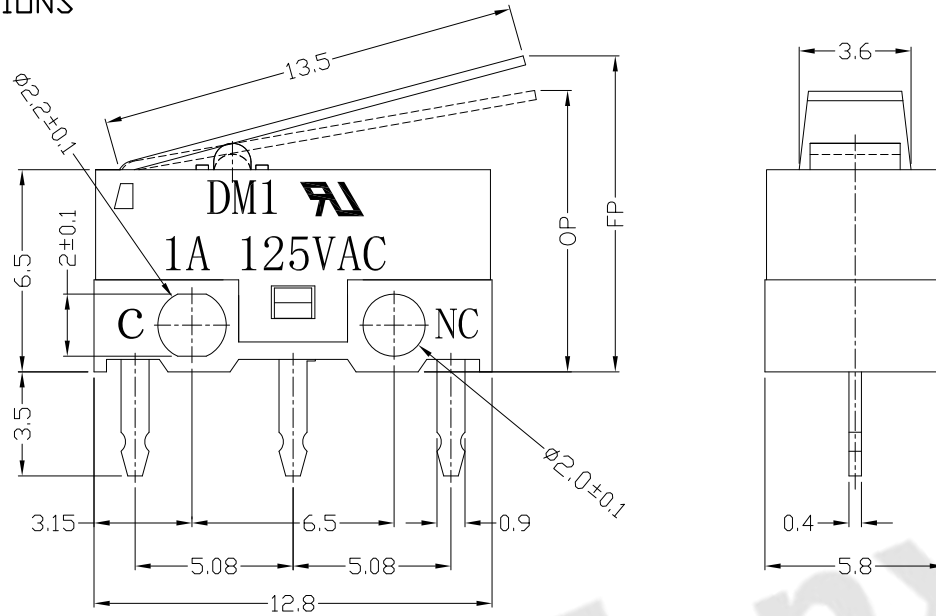


1.Functional spec

1.1 Rated Voltage	125VAC/DC5V
1.2 Rated Current	1A/30mA
1.3 Contact Resistance	≤100mΩ(Initial value)
1.4 Operating Force	30(20~50gf) 40±20gf
1.5 Bounce Time	
1.6 Free Position	10.4±0.8mm
1.7 Operating Position	8.8±0.8mm
1.8 Position Travel	
1.9 Return Force	

MODEL CODE

DM 1 - 01 X - XX - 3
1 2 3 4 5 6

- Series : DM
- Current Rating : 1=1A 125VAC ; 30mA DC5V
- Actuator : 00=non-lever 01-99=Lever
- Termination : see chart (P/C/D/T/N)
- Operating Force : see chart
- Button colour : 3=white
- Cover type : No-0=have two lines



CIRCUIT DIAGRAM

2.Reliable Rating

2.1 Mechanical Life	1,000,000 CYCLES
2.2 Electrical Life	10,000 CYCLES
2.3 Insulation Resistance	≥100MΩ DC500V
2.4 Withstand Voltage	AC500V 1 minute
2.5 Soldering Technic	Hand Soldering
2.6 Operating Temper	-25°C ~ +65°C
2.7 Ambient Humidity Used	<85%RH


Tolerance:±0.2		UNITS	东莞市腾兴电子有限公司			
		mm	TITLE:		PART NO.:	
		MAT'L	MICRO SWITCH DM SERIES		DM1-01P-XX-3	
		SEE NOTE	DR: Ricky 2017/2/16		DWG NO.:	
		FINISH	CHKD: Ricky 2017/2/16		ATD-01X-XX-3	
		SEE NOTE	APPD:		SCALE	SHEET
		Q'TY			1:1	1/2
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.					REV.	CUSTOMER DRAWING
					A	





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

Terminal Type

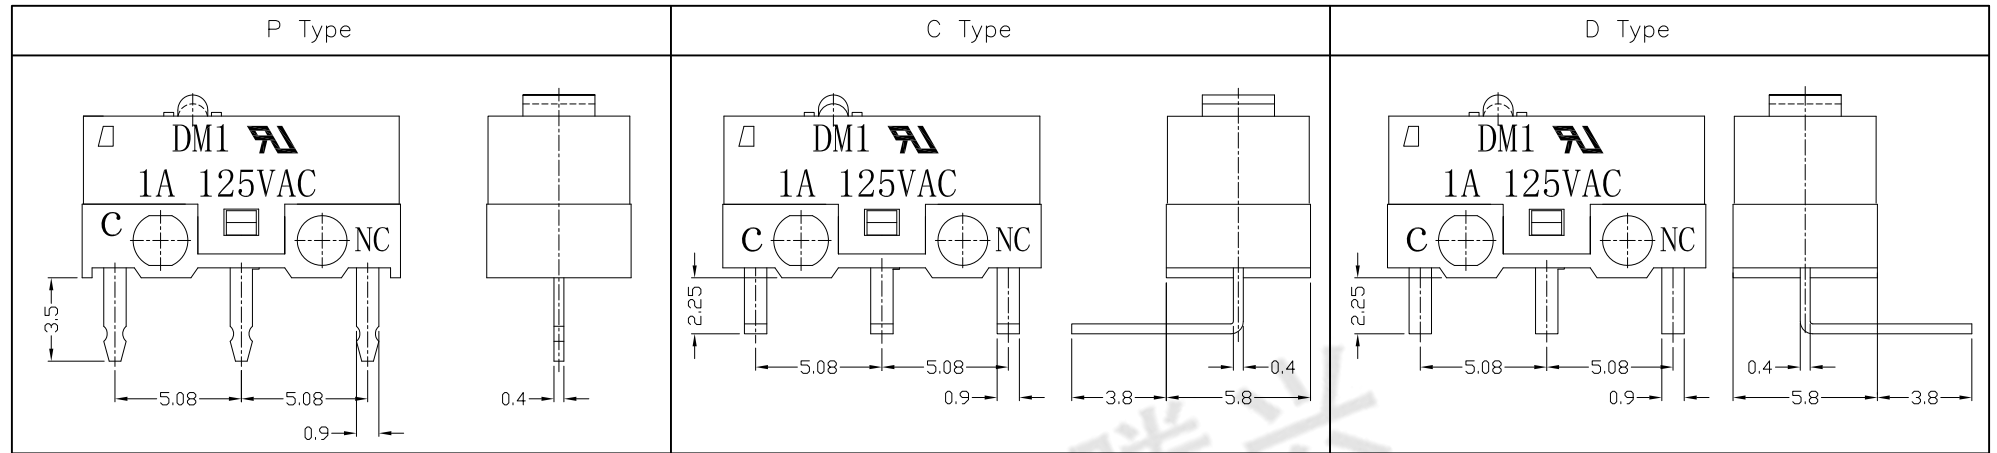

Structure chart

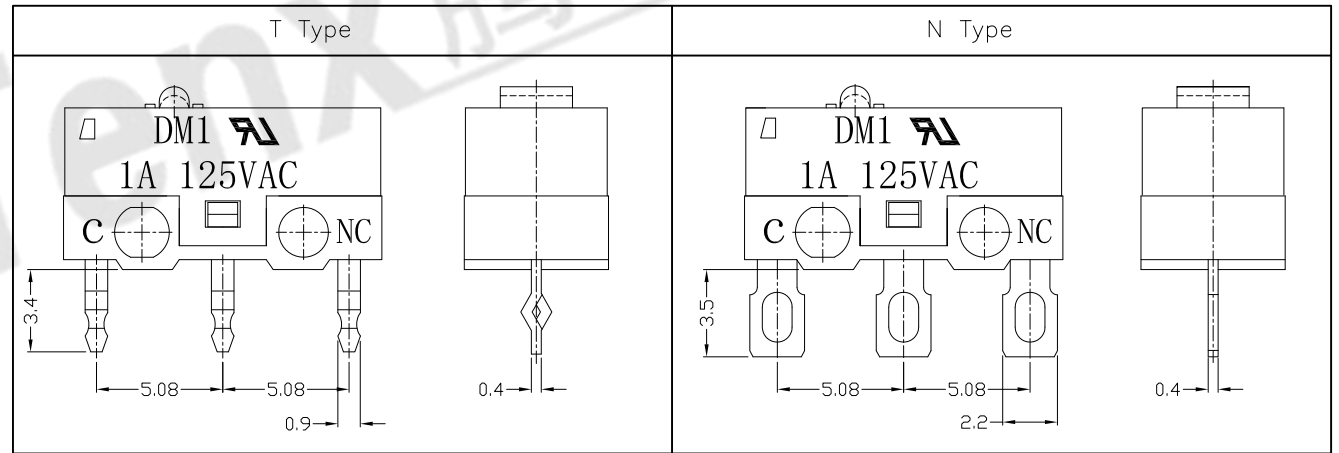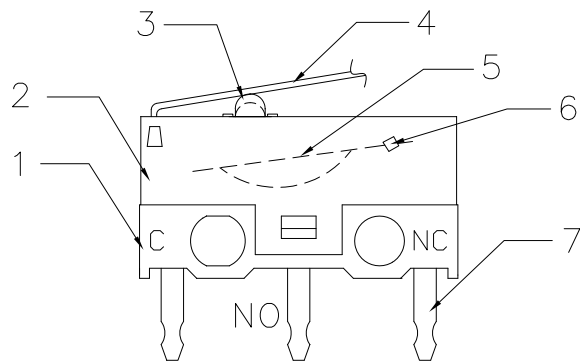

Material list

NO.	PARTS	MATERIAL	Q'TY	FINISHING
8				
7	Terminal	C2680	3	
6	Contact	Silver alloy	1	
5	Spring Plate	C1720	1	
4	Lever	SUS301	1	
3	Button	PBT	1	WHITE
2	Case	PBT	1	BLACK
1	Base	PBT	1	WHITE

Tolerance: ±0.2

UNITS mm

MAT'L

SEE NOTE

FINISH

SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.


东莞市腾兴电子有限公司			
TITLE:	MICRO SWITCH DM SERIES	PART NO.:	DM1-01X-XX-3
DR:	Ricky 2017/2/16	DWG NO.:	ATD-01X-XX-3
CHKD:	Ricky 2017/2/16	SCALE	1:1
APPD:		SHEET	2/2
		REV.	A
		CUSTOMER	DRAWING



RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

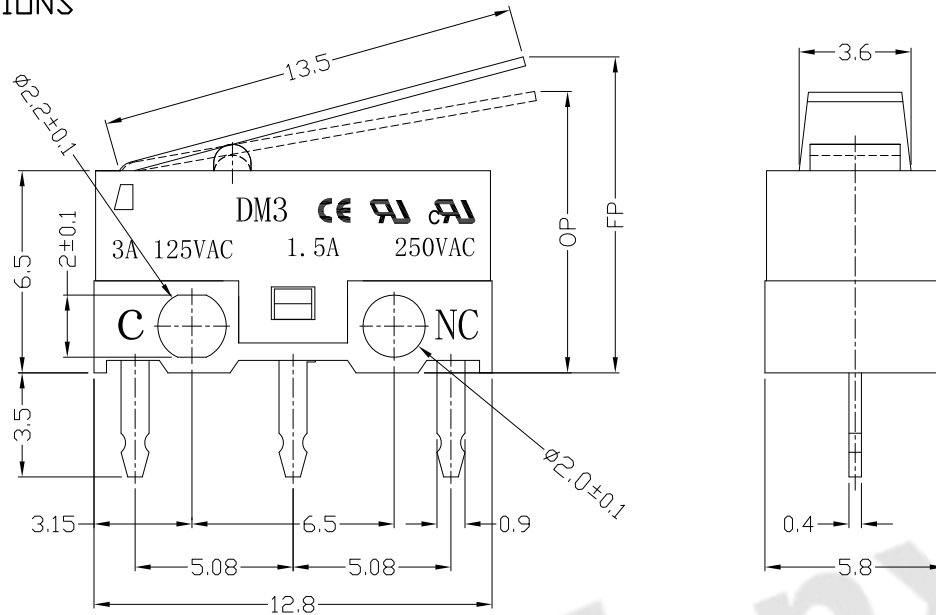


1.Functional spec

1.1 Rated Voltage	125VAC/250VAC
1.2 Rated Current	3A/1.5A
1.3 Contact Resistance	≤100mΩ(Initial value)
1.4 Operating Force	30(20~50gf) 40±20gf
1.5 Bounce Time	
1.6 Free Position	10.4±0.8mm
1.7 Operating Position	8.8±0.8mm
1.8 Position Travel	
1.9 Return Force	

MODEL CODE

DM 3 - 01 X - XX - 6 - 0
1 2 3 4 5 6 7

- Series : DM
- Current Rating : 3=3A 125VAC ; 1.5A 250VAC
- Actuator : 00=non-lever 01-99=Lever
- Termination : see chart (P/C/D/T/N)
- Operating Force : see chart
- Button colour : 6=grey
- Cover type : 0=No two lines



CIRCUIT DIAGRAM

2.Reliable Rating

2.1 Mechanical Life	1,000,000 CYCLES
2.2 Electrical Life	10,000 CYCLES
2.3 Insulation Resistance	≥100MΩ DC500V
2.4 Withstand Voltage	AC500V 1 minute
2.5 Soldering Technic	Hand Soldering
2.6 Operating Temper	-25°C ~ +65°C
2.7 Ambient Humidity Used	<85%RH


Tolerance:±0.2		UNITS	东莞市腾兴电子有限公司			
		mm				
		MAT'L	SEE NOTE		PART NO.:	
		FINISH	SEE NOTE		TITLE:	
		Q'TY	SEE NOTE		DR: <i>Ricky</i> 2017/2/20	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			APPD:		DWG NO.:	
			CHKD: <i>Ricky</i> 2017/2/20		ATD-01X-XX-6-0	
			SCALE	SHEET	REV.	CUSTOMER DRAWING
			1:1	1/2	A	





RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	NO.	APPD.

Terminal Type

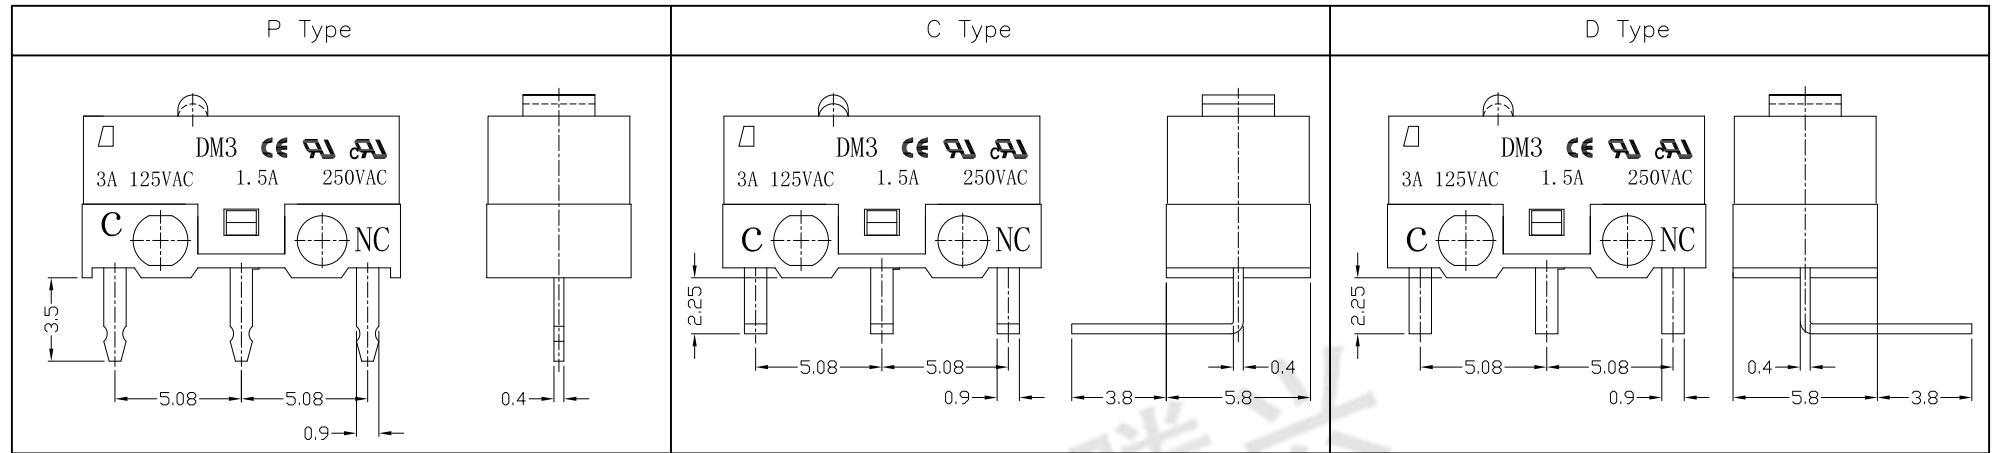

Structure chart

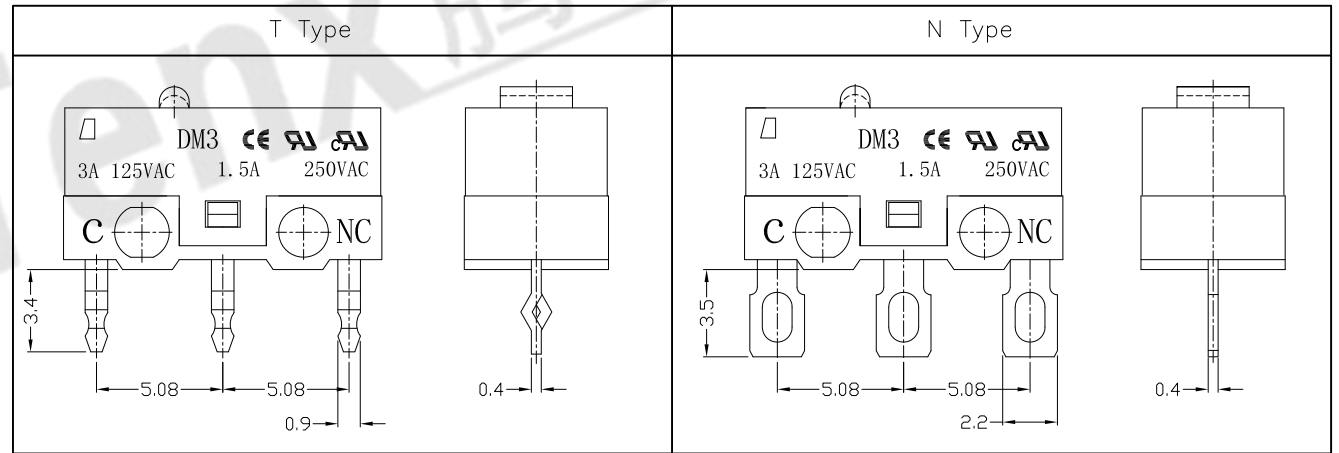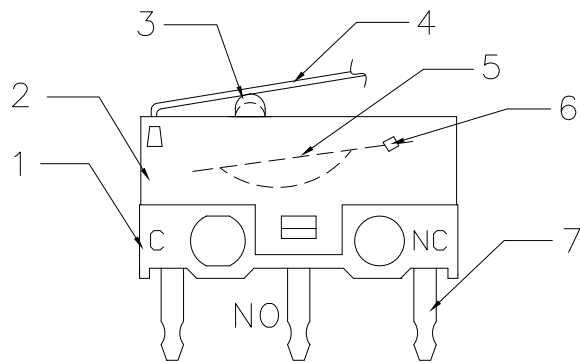

Material list

NO.	PARTS	MATERIAL	Q'TY	FINISHING	UNITS	mm	东莞市腾兴电子有限公司				
8					Tolerance: ±0.2		TITLE: MICRO SWITCH DM SERIES PART NO.: DM3-01X-XX-6-0 DR: Ricky 2017/2/20 DWG NO.: ATD-01X-XX-6-0 CHKD: Ricky 2017/2/20 APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
7	Terminal	C2680	3			MAT'L					
6	Contact	Silver alloy	3			SEE NOTE					
5	Spring Plate	C1720	1			FINISH					
4	Lever	SUS301	1			SEE NOTE					
3	Button	Nylon	1	GREY		Q'TY	11	2/2	A		
2	Case	PBT	1	BLACK							
1	Base	PBT	1	WHITE							

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.