




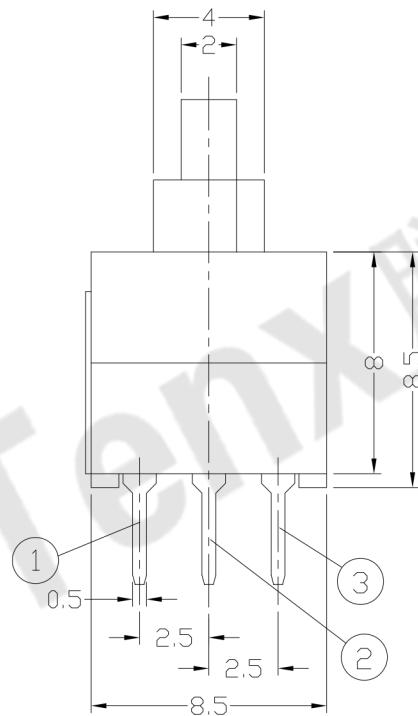


RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

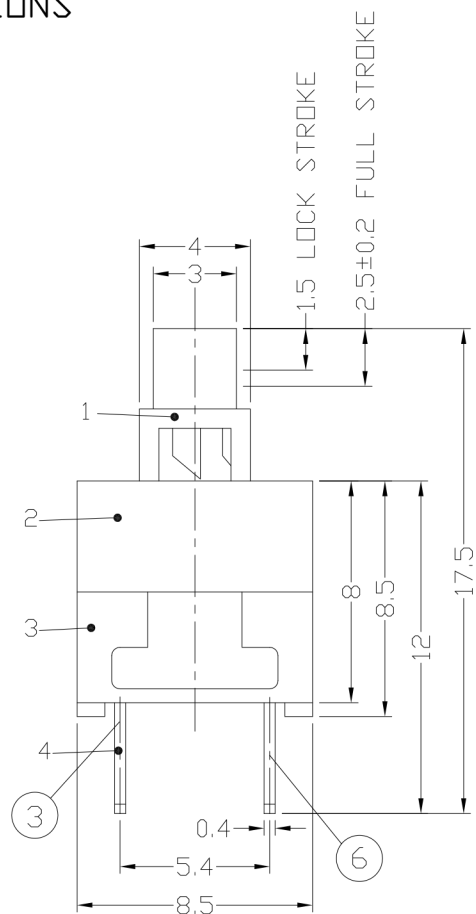

P.C.B LAYOUT

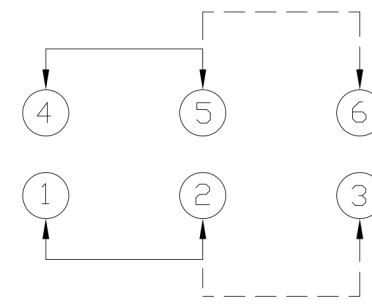

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC40V 0.1A	
CIRCUIT	2P2T	
CONTACT RESISTANCE	50mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	SELF-LOCK	AP-2214L
	NON-LOCK	AP-2214N
STROKE	FULL 2.5mm	LOCK 1.5mm
OPERATING FORCE	180±60gf	250±100gf
OPERATING LIFE(cycles)	10,000	

NO	PARTS	MATERIAL	QTY	FINISHING
7	SPRING PLATE/CAM/STICK	PBS	2	Ag CLAD
6	SPRING	SUS WIRE	1	NATURAL
5	LOCK PIN	SUS WIRE	1	Ni PLATED
4	TERMINAL	BRASS STRIP	6	Ag PLATED
3	CASE	NYLON+F.G	1	BLACK
2	COVER	NYLON+F.G	1	BLACK
1	KNOB	POM	1	NATURAL

WITHIN 1.5mm: ±0.1mm	UNITS mm
OVER 1.5mm: ±0.2mm	MAT'L
	SEE NOTE
	FINISH
	SEE NOTE
	Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.

东莞市腾兴电子有限公司

TITLE: PUSH SWITCH / VERTICAL	PART NO.: AP-2214L & AP-2214N
DR: <i>Ricky</i> 2017/05/15	DWG NO.: AZJ-2214
CHKD: <i>Ricky</i> 2017/05/15	SCALE SHEET REV. CUSTOMER 5:1 1/1 A DRAWING
APPD:	