




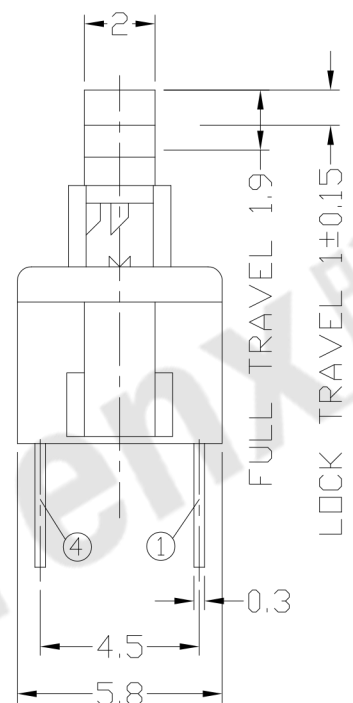


RoHS Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

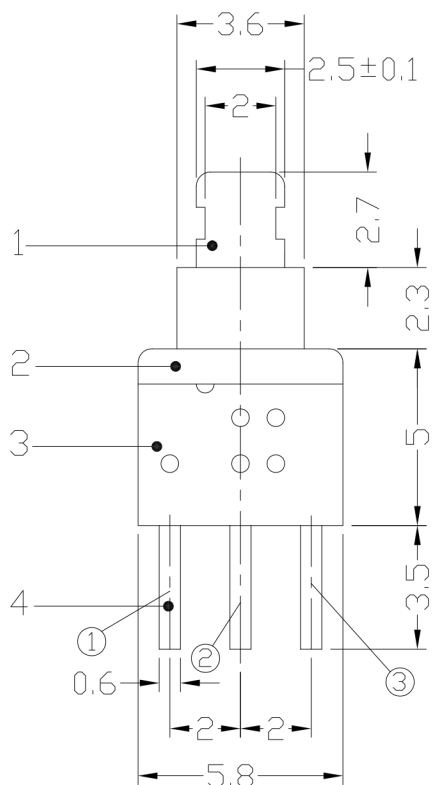

P.C.B LAYOUT
TOP VIEW



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC12V 0.1A	
CIRCUIT	2P2T	
CONTACT RESISTANCE	70mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	SELF-LOCK	AP-2216L
	NON-LOCK	AP-2216N
STROKE	FULL 1.9mm	LOCK 1.0mm
OPERATING FORCE	180±60gf	250±100gf
OPERATING LIFE(cycles)	10,000	

7	CONTACT	PBS	2	Ag CLAD	WITHIN 1.5mm: ±0.1mm
6	SPRING	SUS WIRE	1	NATURAL	OVER 1.5mm: ±0.2mm
5	LOCK PIN	SUS WIRE	1	NATURAL	
4	TERMINAL	BRASS STRIP	6	Ag PLATED OVER Ni PLATED	
3	COVER	POM	1	BLACK	
2	CASE	NYLON+F.G	1	GREY	
1	KNOB	POM	1	WHITE	
NO	PARTS	MATERIAL	QTY	FINISHING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATION INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATION INC.

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	

东莞市腾兴电子有限公司

TITLE:	PUSH SWITCH / VERTICAL	PART NO.:	AP-2216L & AP-2216N		
DR:	Ricky 2017/05/15	DWG NO.:	AZJ-2216		
CHKD:	Ricky 2017/05/15	SCALE	6:1	SHEET	1/1
APPD:		REV.	A	CUSTOMER	DRAWING