

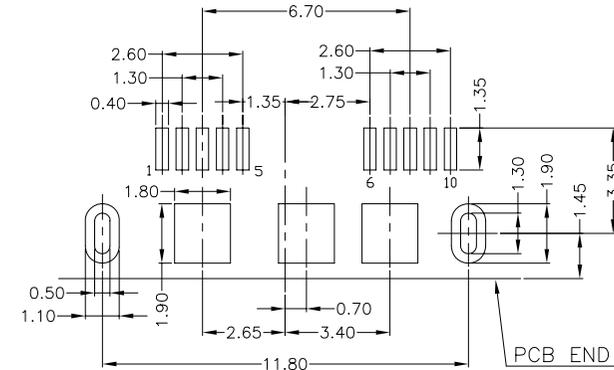
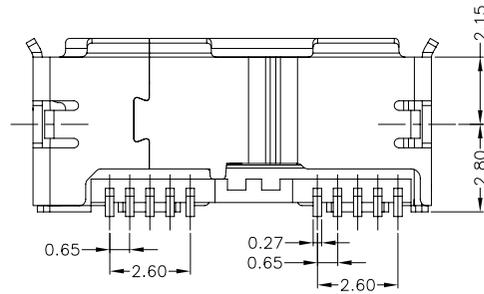
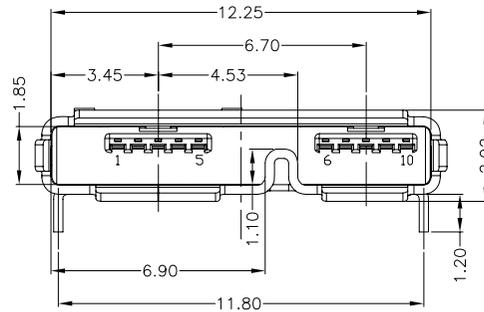




RoHS  
Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.


PIN NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	ID
5	GND
6	MICB_SSTX-
7	MICB_SSTX+
8	GND_DRAIN
9	MICB_SSRX-
10	MICB_SSRX+
Shell	Shield

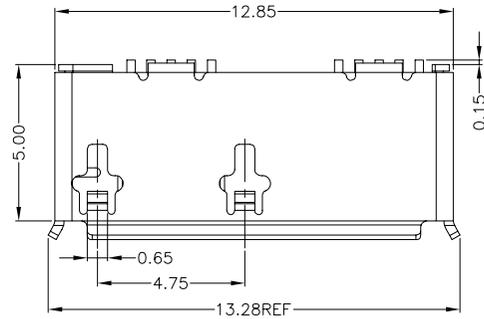

RECOMMENDED PCB LAYOUT

- NOTES:
- ELECTRICAL:
    - VOLTAGE CURRENT RATING: 1.0AMP, 30V AC;
    - INSULATION RESISTANCE: 100MΩ MIN;
    - CONTACT RESISTANCE: 30mΩ MAX;
    - WITHSTANDING VOLTAGE: 500V AC;
    - OPERATING TEMPERATURE: -40°C TO +85°C.
  - Mechanical:
    - Mating Force: 35N MAX
    - Unmating Force: 8N MIN.
  - NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL
2	HOUSING	LCP	1	UL94V-0
1	TERMINAL	COPPER ALLOY	10	PLATED GOLD/TIN

X.	X.* ±2'	UNITS
±0.35	±2'	mm
.X	.X' ±1'	MAT'L
±0.3	±1'	SEE NOTE
.XX	.XX'	FINISH
±0.25	±XX'	SEE NOTE
.XXX	.XXX'	Q'TY
±0.15	±XXX'	SEE NOTE

**东莞市腾兴电子有限公司**

TITLE: MICRO USB3.0 AB FEMALE SMT (DIP SHELL)	PART NO.: MUZF-105N-4BHT02
DR: gan 2016/8/30	DWG NO.: AII-HT02
CHKD: gan 2016/8/30	SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING
APPD:	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.