

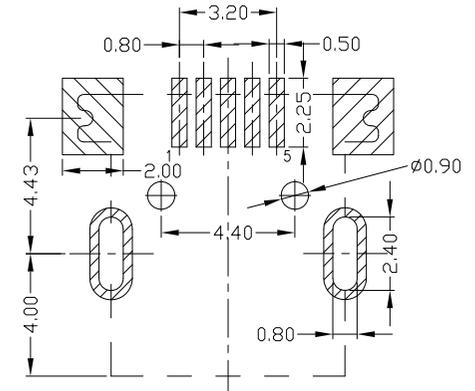
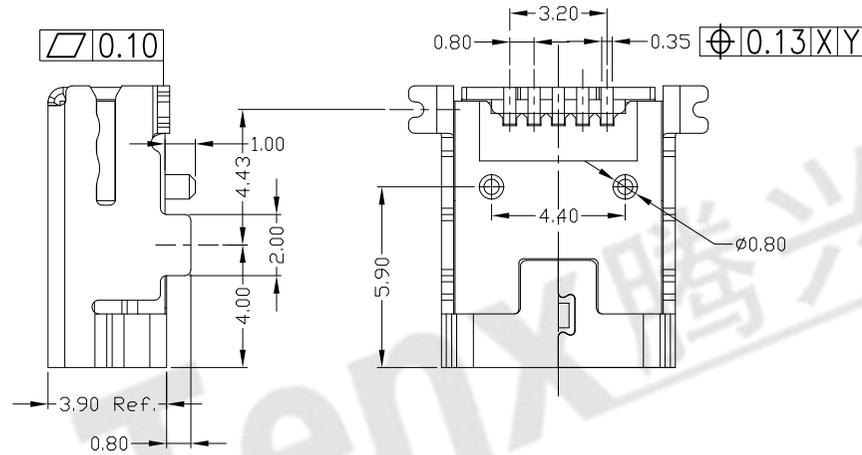


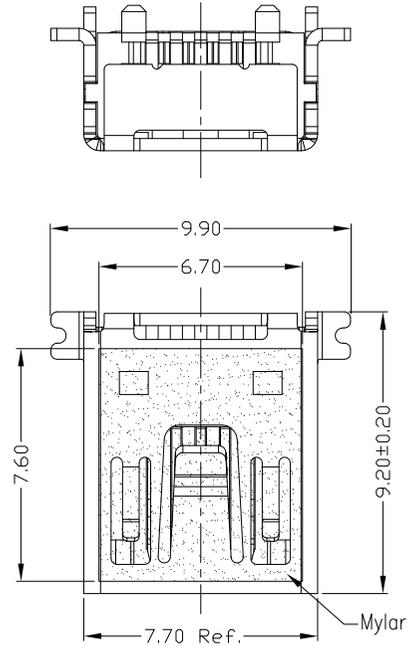


RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD



RECOMMENDED P.C.B LAYOUT

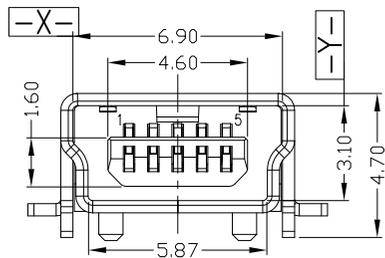


NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE: -25°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 7N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

MUBF-05*N-4BHUA353-M



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市腾兴电子有限公司			
5				.X ±0.15	Ang1°		TITLE: MINI USB 5P F SMT B Type 前插后贴有柱贴麦拉			
4				.XX ±0.10						
3	SHELL	COPPER ALLOY	1	PLATED NICKEL/TIN	.XXX ±0.05		DR: Ricky 2017/10/11			
2	HOUSING	LCP+30%GF	1	UL94V-0			DWG NO.: AII-HUA353			
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN			CHKD: Ricky 2017/10/11			
							APPD: Ricky 2017/10/11			
							SCALE	SHEET	REV.	CUSTOMER
							4:1	1/1	B	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNDTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNDTECH INC