

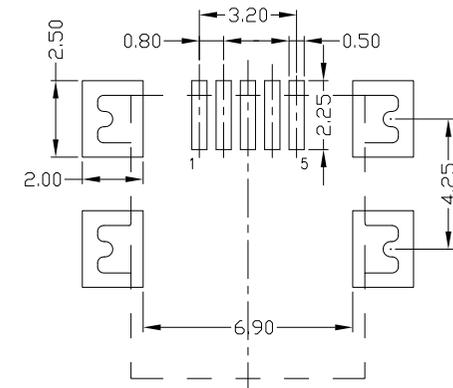

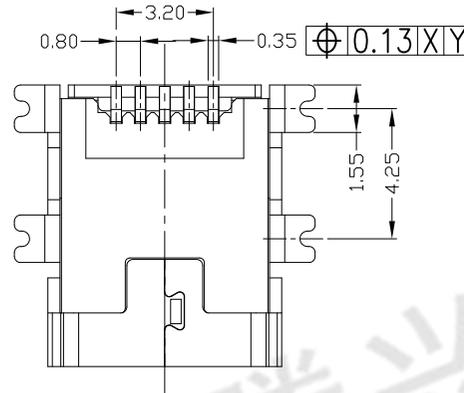



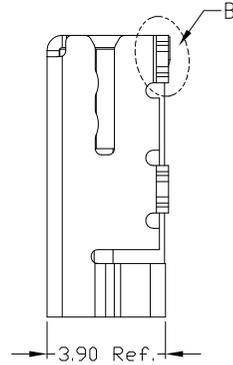


RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

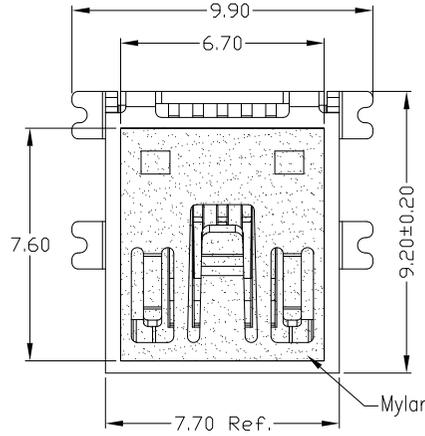

RECOMMENDED P.C.B LAYOUT

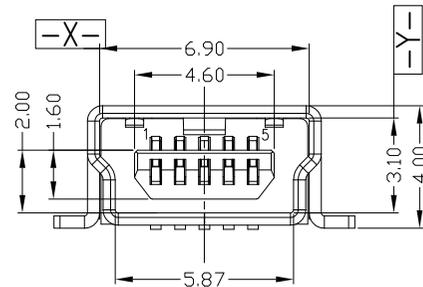

DETAIL B
(2:1)

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE: -25°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 7N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

MUBF-05***T**-4BHUA637-M

1: Au 10"
6: Au 30U"

N: NICKET
T: TIN

W: WHITE
B: BLACK

1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	.X ±0.15	Ang1°	UNITS	mm	东莞市腾兴电子有限公司				
5					.XX ±0.10		MAT'L		TITLE: MINI USB 5P F SMT B Type 4.25无柱贴麦拉				
4					.XXX ±0.05		SEE NOTE						PART NO.: MUBF-05XT-4BHUA637-M
3	SHELL	COPPER ALLOY	1	PLATED TIN/NICKEL			FINISH		DR: Ricky 2017/10/11				
2	HOUSING	LCP+30%GF	1	UL94V-0			SEE NOTE		DWG NO.: AII-HUA637				
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN			Q'TY		CHKD: Ricky 2017/10/11				
									APPD:	SCALE	SHEET	REV.	CUSTOMER
										4:1	1/1	B	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC