

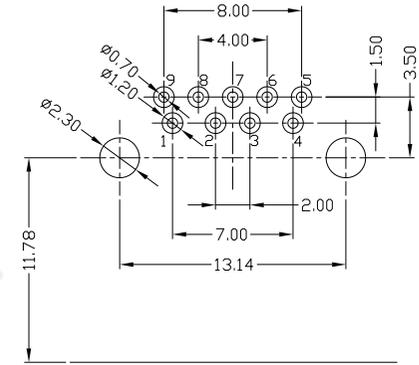
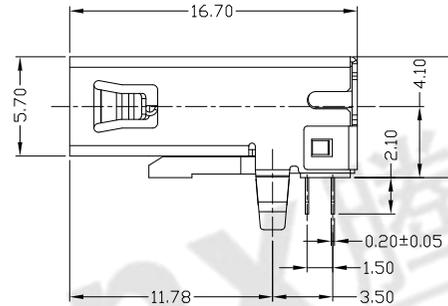





RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

PIN NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	STDA_SSRX-
6	STDA_SSRX+
7	GND_DRAIN
8	STDA_SSTX-
9	STDA_SSTX+
Shell	Shield

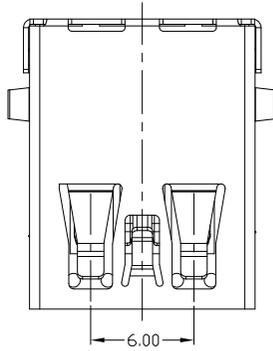

RECOMMENDED PCB LAYOUT

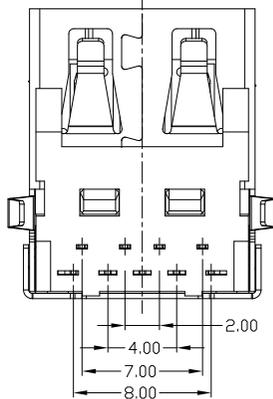

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.* ±2*	UNITS	mm
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X* ±1*	MAT'L	SEE NOTE
2	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	.XX ±0.25	.XX*	FINISH	SEE NOTE
1	HOUSING	PA9T+30%GF	1	UL94V-0	.XXX ±0.15	.XXX*	Q'TY	SEE NOTE
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVTECH INC.			

NOTES:

- ELECTRICAL:
  - CURRENT RATING: 1.5 AMP;
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 100V AC;
  - OPERATING TEMPERATURE: -40°C ~ +85°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-09\*N-3BLRC113

1Au 1U\*  
5Au 15U\*  
6Au 30U\*

W:WHITE  
B:BLACK  
BL:BLUE

1PBT  
2PA6T  
3PA9T  
4LCP

东莞市腾兴电子有限公司

TITLE:  
USB 3.0 AF 90度 DIP 无卷边 弯脚  
成品图

PART NO.:  
USAF-09\*N-3BLRC113

DR: gan 2016/12/1

DWG NO.:  
AII-RC113

CHKD: gan 2016/12/1

SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	B	

APPD: