





RoHS
Compliant
2002/95/EC





REV.	ECN.	NO.	APPD.

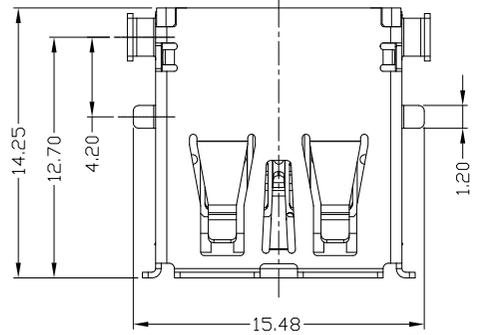

Pin #	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	STDA_SSRX-
6	STDA_SSRX+
7	GND_DRAIN
8	STDA_SSTX-
9	STDA_SSTX+
Shell	Shield

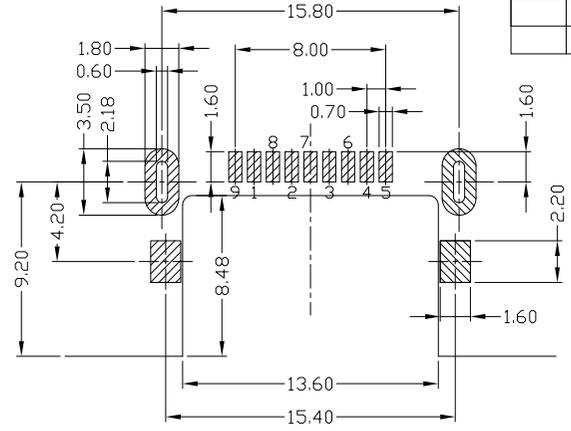

RECOMMENDED PCB LAYOUT

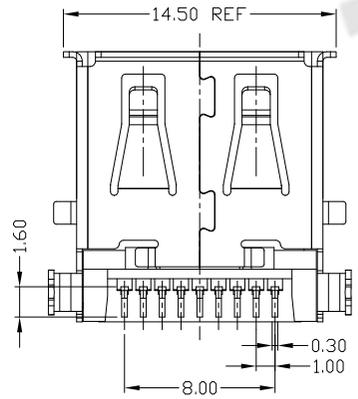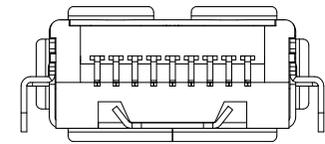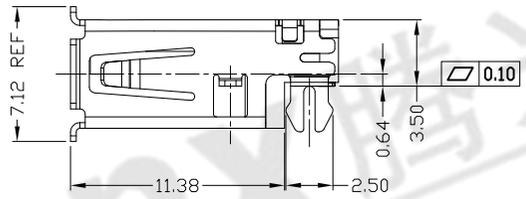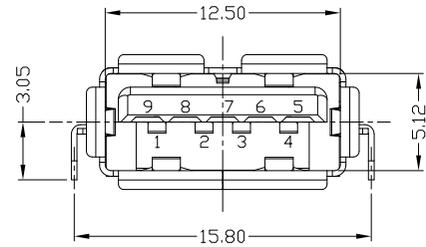

NOTES:

- ELECTRICAL:
 - CURRENT RATING:1.5AMP;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE:-25°C ~ +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-09*N-4BLVC10

1:Au 1U'
5:Au 15U'
6:Au 30U'

1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	SHELL	COPPER ALLOY	1	PLATED NICKEL
2	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN
1	HOUSING	LCP+30%GF	1	UL94V-0

X.	X' ±0.35	X' ±2'	UNITS
.X	±0.3	±1'	mm
.XX	±0.25	±1'	SEE NOTE
.XXX	±0.15	±1'	SEE NOTE

东莞市腾兴电子有限公司

TITLE: USB 3.0 AF沉板 SMT 卷边鱼叉脚

PART NO.: USAF-09*N-4BLVC10

DR: gan 2016/12/1

DWG NO.: AII-VC10

CHKD: gan 2016/12/1

SCALE: 1:1

SHEET: 1/1

REV.: B

APPD:

CUSTOMER DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATION AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATION INC.

