

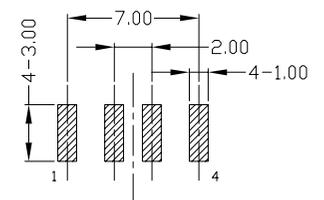
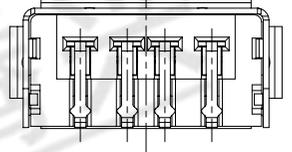
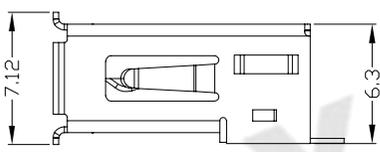
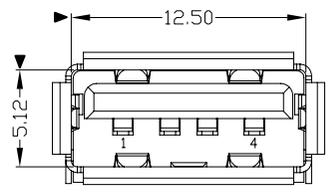
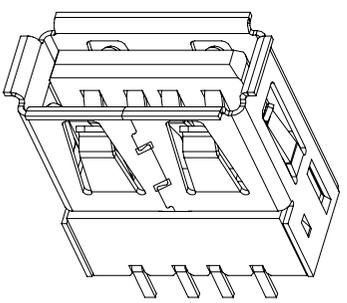



RoHS Compliant
 2002/95/EC
 Process Capable

| REV | LTR | DESCRIPTION | DATE | APPROVED |
|-----|-----|-------------|------|----------|
| | | | | |

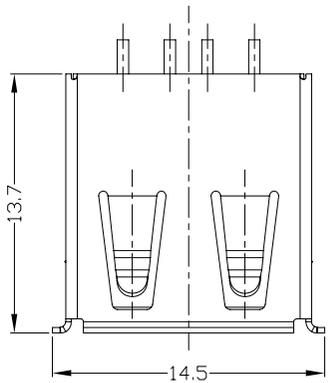

RECOMMENDED PCB LAYOUT

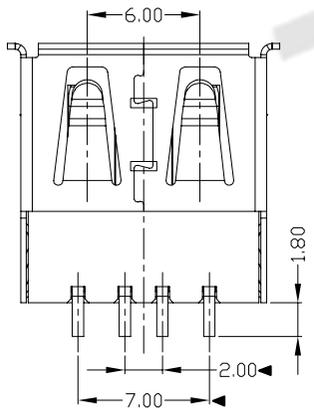

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-4*V68
 1: Au 1U"
 6: Au 30U"
 W: WHITE
 B: BLACK
 1: PBT
 2: PA6T
 3: PA9T
 4: LCP

Bill of materials:

| NO | PARTS | MATERIAL | QTY | FINISHING | UNITS | mm | 东莞市腾兴电子有限公司 | | | | |
|----|----------|--------------|-----|-----------------|--|---------|-------------|------------------------|-------|-----------------|------------------|
| 3 | HOUSING | LCP | 1 | UL94V-0 | X. ±0.35 | X.* ±2* | MAT'L | TITLE: | | PART NO.: | |
| 2 | SHELL | COPPER ALLOY | 1 | PLATED NICKEL | .X ±0.3 | .X* ±1* | SEE NOTE | USB A/F SMT型 一型 无脚 无后盖 | | USAF-04*N-4*V68 | |
| 1 | TERMINAL | COPPER ALLOY | 4 | PLATED GOLD/TIN | .XX ±0.25 | .XX* | FINISH | DR: gan 2012/6/30 | | DWG NO.: | |
| | | | | | .XXX ±0.15 | .XXX* | SEE NOTE | CHKD: gan 2012/6/30 | | AII-V68 | |
| | | | | | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC | | Q'TY | SCALE | SHEET | REV. | CUSTOMER DRAWING |
| | | | | | | | | 1:1 | 1/1 | B | |