

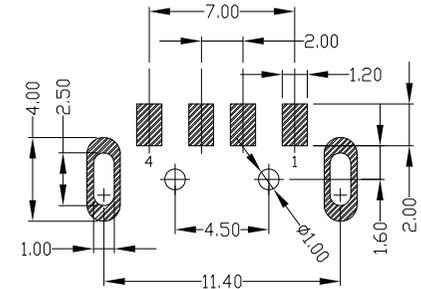

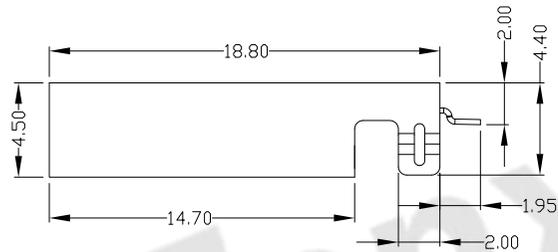





RoHS
Compliant
2002/95/EC

| REV | LTR | DESCRIPTION | DATE | REVISER | APPD |
|-----|-----|-------------|------|---------|------|
| | | | | | |

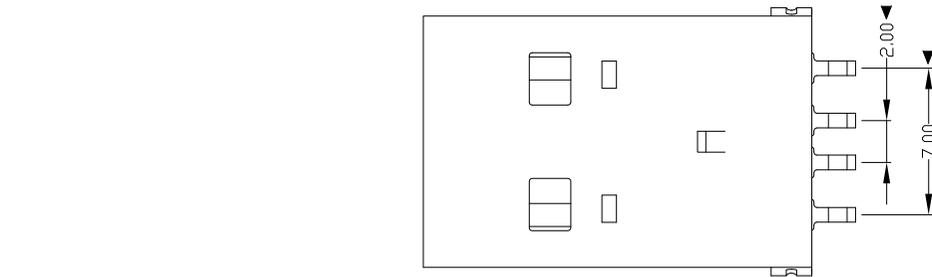


RECOMMENDED PCB LAYOUT

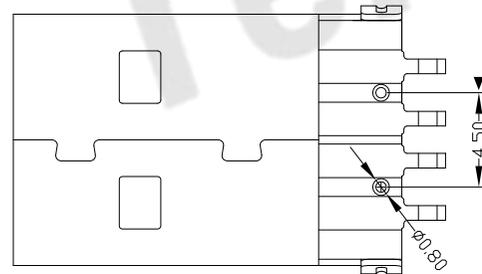

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.



Bill of materials:

| NO | PARTS | MATERIAL | QTY | FINISHING | UNITS | mm | 东莞市腾兴电子有限公司 | | | | | | |
|----|----------|--------------|-----|-----------------|------------|---------|-------------|---------------------------------|---------------------|------------------------------|-------|----------|-------------------|
| 3 | HOUSING | LCP | 1 | UL94V-0 | X. ±0.35 | X.* ±2* | MAT'L | TITLE: USB A/M 沉板式成品 (19.80) | | PART NO.: USAM-04*N-4*V81 | | | |
| 2 | SHELL | SPCC | 1 | PLATED NICKEL | .X ±0.3 | .X* ±1* | | | | | | SEE NOTE | DR: gan 2012/7/03 |
| 1 | TERMINAL | COPPER ALLOY | 4 | PLATED GOLD/TIN | .XXX ±0.15 | .XXX* | FINISH | SEE NOTE | CHKD: gan 2012/7/03 | SCALE | SHEET | REV. | CUSTOMER |
| | | | | | | | Q'TY | APPD: | gan 2012/7/03 | 1:1 | 1/1 | B | DRAWING |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNDTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNDTECH INC.

