

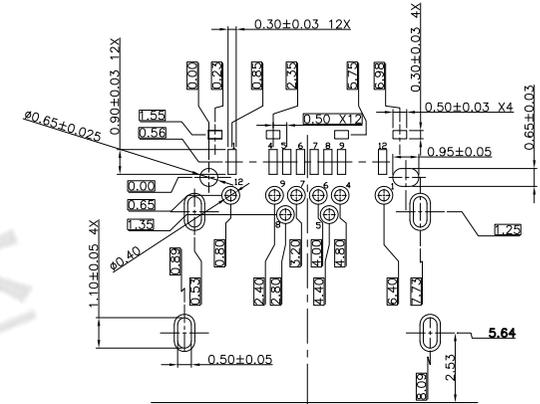
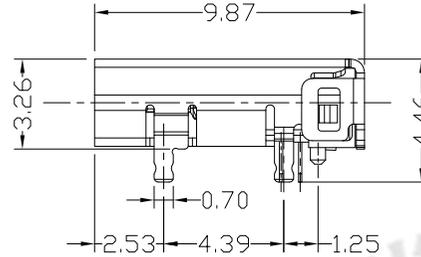
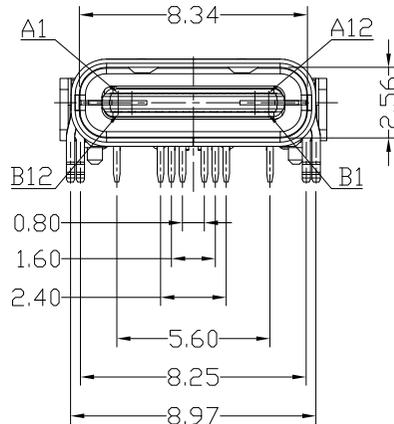


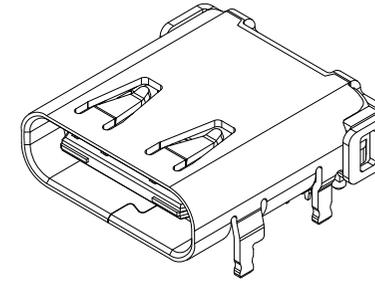


RoHS  
Compliant  
2002/95/EC

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
|      |      |     |       |
|      |      |     |       |



RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm  
CONNECTOR FRONT EDGE

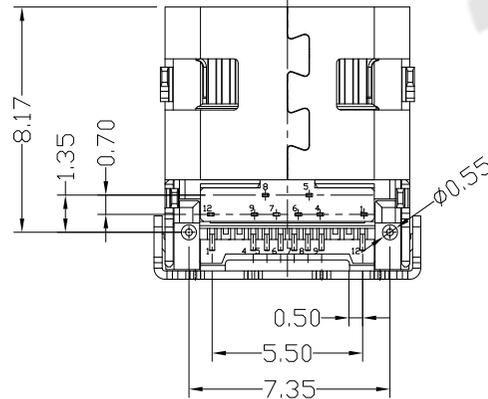

| A1  | GND         | B12 | GND         |
|-----|-------------|-----|-------------|
| A4  | VBUS        | B9  | VBUS        |
| A5  | CC1         | B8  | SBU2        |
| A6  | DP1         | B7  | DN2         |
| A7  | DN1         | B6  | DP2         |
| A8  | SBU1        | B5  | CC2         |
| A9  | VBUS        | B4  | VBUS        |
| A12 | GND         | B1  | GND         |
| PIN | SIGNAL NAME | PIN | SIGNAL NAME |

NOTES:

- ELECTRICAL:
  - CURRENT RATING: 3AMP MAX;
  - INSULATION RESISTANCE: 100MΩ MIN 250V DC;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 250V AC;
  - OPERATING TEMPERATURE: -30°C TO +80°C.
- Mechanical:
  - Mating Force: 35N MAX.
  - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼"  
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USCF-16\*N-4BL60

1:4u 1U\*  
2:4u 3U\*  
5:4u 15u\*  
6:4u 30U\*

W:WHITE  
B:BLACK  
BL:BLUE  
1:PBT  
2:PA6T  
3:PA9T  
4:LCP

|    |          |                 |     |            |         |          |
|----|----------|-----------------|-----|------------|---------|----------|
| 5  | SHRAPNEL | STAINLESS STEEL | 2   | .X ±0.30   | .X' ±1* | UNITS mm |
| 4  | HOOK     | STAINLESS STEEL | 1   | .XX ±0.20  | .XX'    | MAT'L    |
| 3  | SHELL    | STAINLESS STEEL | 1   | .XXX ±0.10 | .XXX'   | SEE NOTE |
| 2  | TERMINAL | COPPER ALLOY    | 16  |            |         | FINISH   |
| 1  | HOUSING  | LCP+30%GF       | 1   |            |         | SEE NOTE |
| NO | PARTS    | MATERIAL        | QTY | FINISHING  |         | Q'TY     |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC

|                                |  |                            |                  |
|--------------------------------|--|----------------------------|------------------|
| <b>东莞市腾兴电子有限公司</b>             |  |                            |                  |
| TITLE: USB TYPE CF 前插后贴16P 板上型 |  | PART NO.: USCF-16XN-4BLV60 |                  |
| DR: Ricky 2017/12/12           |  | DWG NO.: AII-V60           |                  |
| CHKD: Ricky 2017/12/12         |  | SCALE: 1:1                 | SHEET: 1/1       |
| APPD:                          |  | REV.: B                    | CUSTOMER DRAWING |