

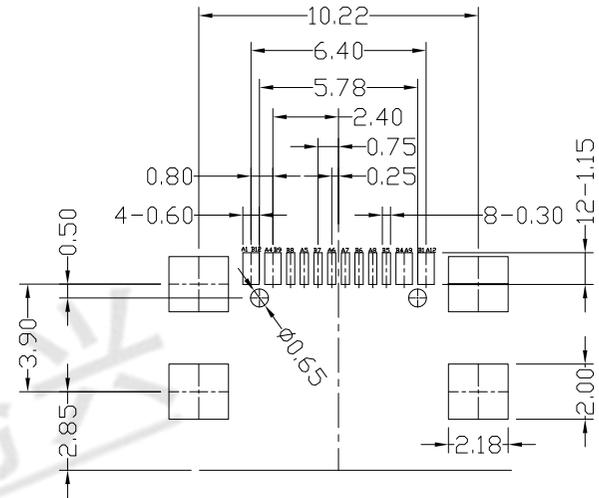
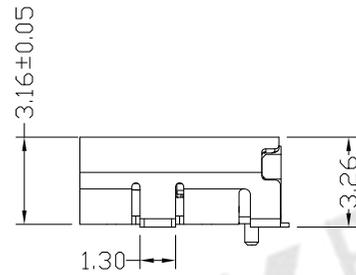
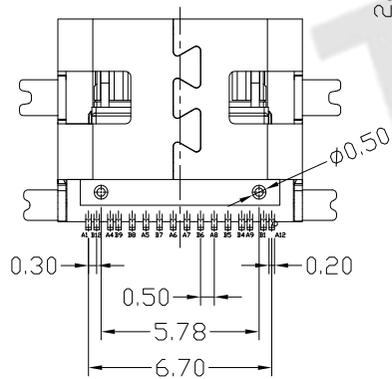


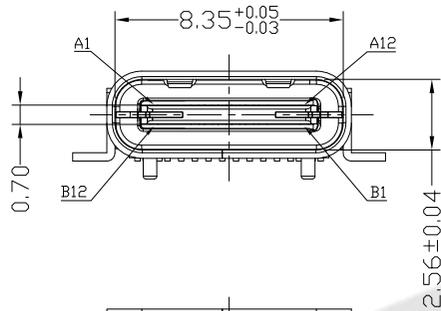

RoHS Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

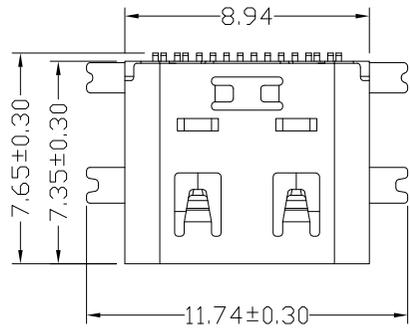

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

- NOTES:
- ELECTRICAL:
 - CURRENT RATING: 3AMP MAX;
 - INSULATION RESISTANCE: 100MΩ MIN 250V DC;
 - CONTACT RESISTANCE: 40mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE: -30°C TO +80°C.
 - Mechanical:
 - Mating Force: 20N MAX.
 - Unmating Force: 6N MIN.
 - DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
USCF-16*N-4BV605
W/WHITE
B/BLACK
1Au 1U*
2Au 3U*
5Au 15u*
6Au 30U*
1PBT
2*PA6T
3*PA9T
4*LCP

5				.X ±0.30	.X' ±1'	UNITS mm
4	HOOK	STAINLESS STEEL	1	.XX ±0.20	.XX'	MAT'L
3	SHELL	STAINLESS STEEL	1	.XXX ±0.10	.XXX'	SEE NOTE
2	TERMINAL	COPPER ALLOY	16			FINISH
1	HOUSING	LCP+30%GF	1			SEE NOTE
NO	PARTS	MATERIAL	QTY	FINISHING		Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC

东莞市腾兴电子有限公司			
TITLE: USB TYPE CF 短体7.35 单排 16P 四脚贴片 有弹 二次成型款		PART NO.: USCF-16XN-4BV605	
DR: Ricky 2019/03/27		DWG NO.: AII-V605	
CHKD: Ricky 2019/03/27		SCALE: 1:1	SHEET: 1/1
APPD:		REV: B	CUSTOMER DRAWING