

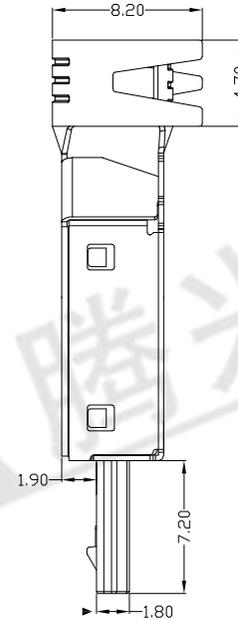



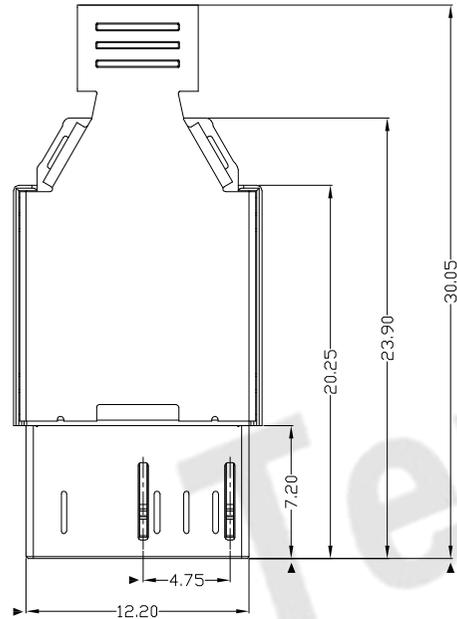

RoHS  
Compliant  
2002/95/EC

| REV | LTR | DESCRIPTION | DATE | REVISER | APPD |
|-----|-----|-------------|------|---------|------|
|     |     |             |      |         |      |



NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: 1AMP, 30V AC;
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 500V AC;
  - OPERATING TEMPERATURE: -40°C TO +85°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
- PART NO.

MUYM-105N-4BSS10

|            |          |
|------------|----------|
| 1: Au 1U'  | W: WHITE |
| 5: Au 15U' | B: BLACK |
| 6: Au 30U' | 1: PBT   |
|            | 2: PA6T  |
|            | 3: PA9T  |
|            | 4: LCP   |

Bill of materials:

| NO | PARTS         | MATERIAL        | QTY | FINISHING       |            |         |        |          |  |
|----|---------------|-----------------|-----|-----------------|------------|---------|--------|----------|--|
| 5  | HOOK          | STAINLESS STEEL | 1   | PLATED NICKEL   | X. ±0.35   | X.' ±2' | UNITS  | mm       | <b>东莞市腾兴电子有限公司</b><br>TITLE: Micro USB 3.0 B TYPE MALE<br>PART NO.: MUYM-105N-4BSS10<br>DR: gan 2012/8/3<br>DWG NO.: AII-SS10<br>CHKD: gan 2012/8/3<br>APPD: |
| 4  | SHELL         | SPCC            | 1   | PLATED NICKEL   | .X ±0.3    | .X' ±1' | MAT'L  | SEE NOTE |  |
| 3  | HOUSING SHELL | COPPER ALLOY    | 1   | PLATED NICKEL   | .XX ±0.25  | .XX'    | FINISH | SEE NOTE |  |
| 2  | HOUSING       | LCP/PBT         | 1   | UL94V-0         | .XXX ±0.15 | .XXX'   | Q'TY   | SEE NOTE |  |
| 1  | TERMINAL      | COPPER ALLOY    | 10  | PLATED GOLD/TIN |            |         |        |          |  |
|    |               |                 |     |                 |            |         |        |          | SCALE: 1:1   |
|    |               |                 |     |                 |            |         |        |          | SHEET: 1/1   |
|    |               |                 |     |                 |            |         |        |          | REV: B   |
|    |               |                 |     |                 |            |         |        |          | CUSTOMER DRAWING   |


THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC





RoHS  
Compliant  
2002/95/EC

| REV | LTR | DESCRIPTION | DATE | REVISER | APPD |
|-----|-----|-------------|------|---------|------|
|     |     |             |      |         |      |

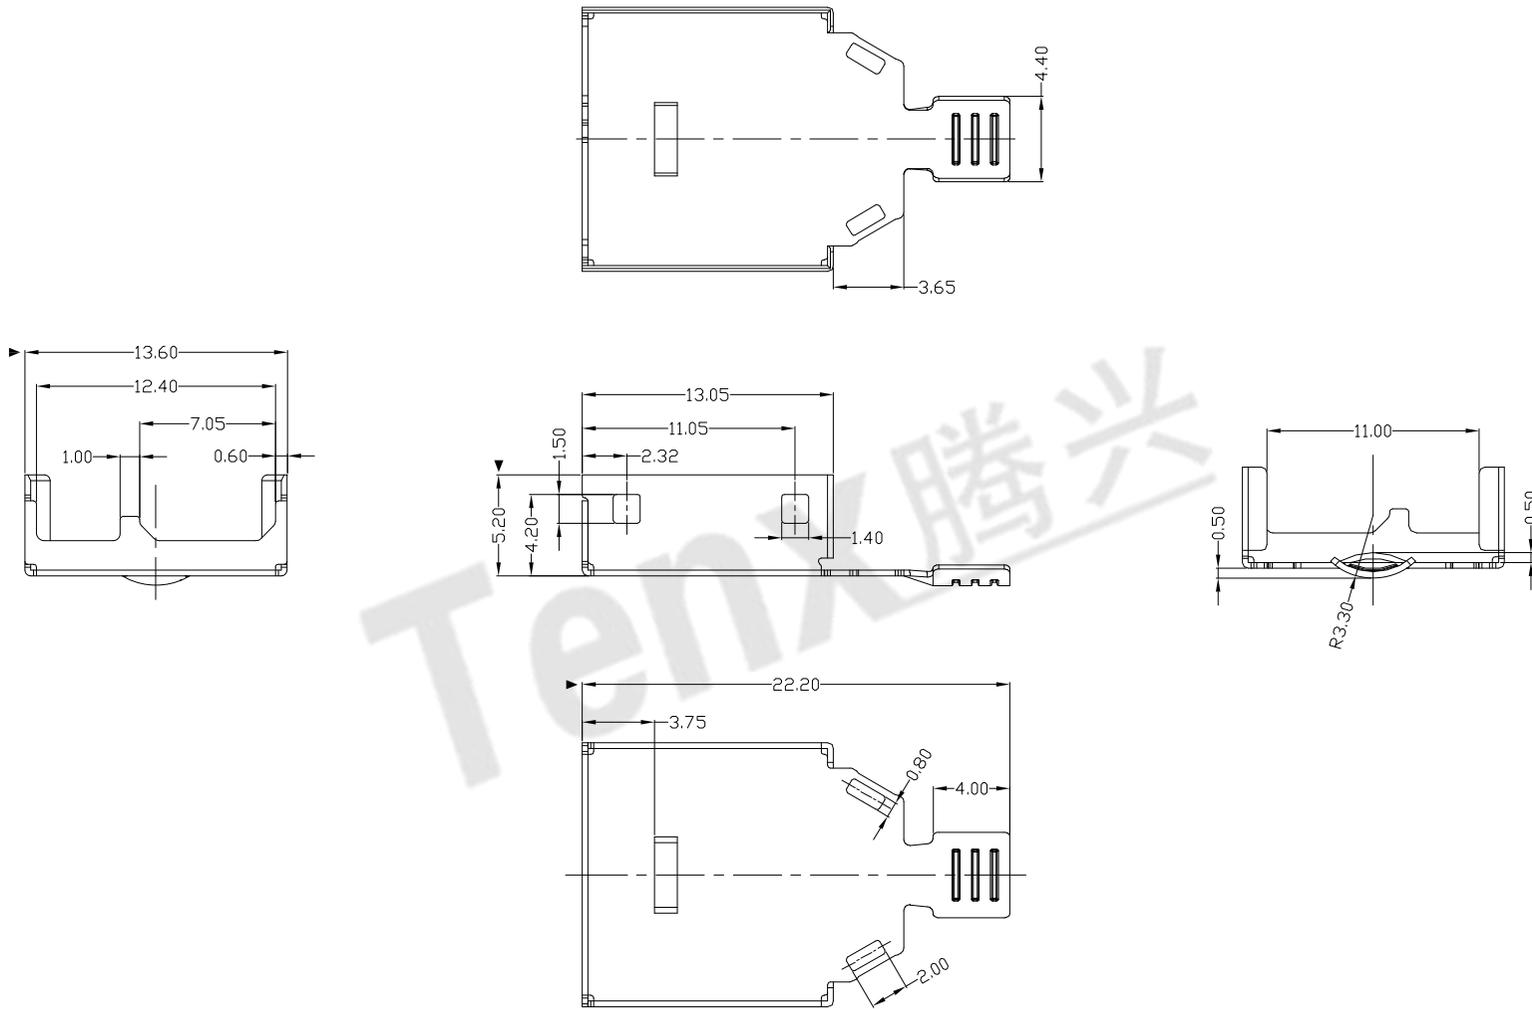

NOTES:

1. Material:

Shell: SPCC Plating Ni





2. NOTE: DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

|  |         |          |  |  |                  |  |
|--|---------|----------|--|--|------------------|--|
| X. ±0.35   | X.' ±2° | UNITS    | 东莞市腾兴电子有限公司                              |  |                  |  |
| .X ±0.3  | .X' ±1° | MAT'L    | Micro USB 3.0 B TYPE MALE (Bottom Shell) |  |                  |  |
| .XX ±0.25  | .XX'    | SEE NOTE | PART NO.:                                |  | MUYM-105N-4BSS10 |  |
| .XXX ±0.15   | .XXX'   | FINISH   | DR: gan 2012/8/3                         |  | DWG NO.:         |  |
| THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC |         | SEE NOTE | CHKD: gan 2012/8/3                       |  | AII-SS10         |  |
|  |         | Q'TY     | APPD:                                    |  | SCALE            |  |
|  |         |          |  |  | SHEET            |  |
|  |         |          |  |  | REV.             |  |
|  |         |          |  |  | CUSTOMER DRAWING |  |
|  |         |          |  |  | 1:1              |  |
|  |         |          |  |  | 1/1              |  |
|  |         |          |  |  | B                |  |



RoHS  
Compliant  
2002/95/EC

| REV | LTR | DESCRIPTION | DATE | REVISER | APPD |
|-----|-----|-------------|------|---------|------|
|     |     |             |      |         |      |

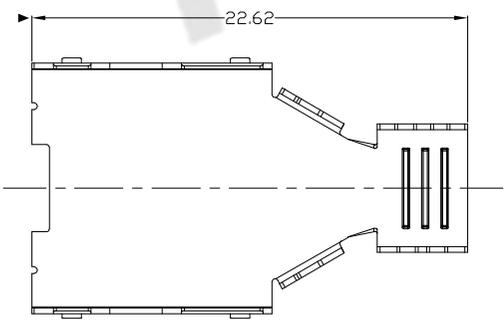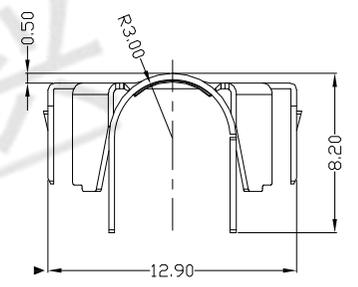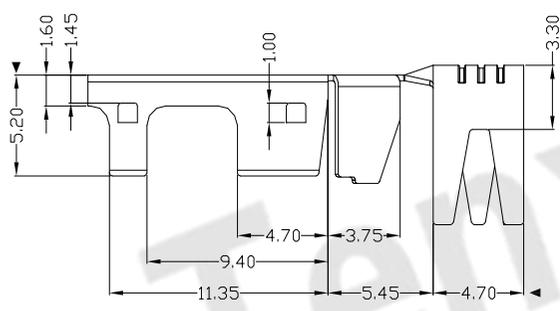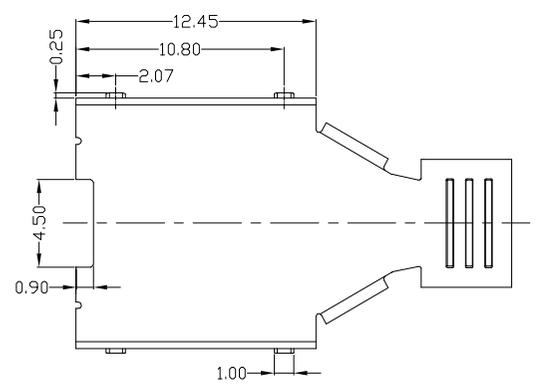


NOTES:  
1. Material:  
Shell: SPCC Plating Ni  
2. NOTE: DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

|  |         |          |  |                  |                               |       |
|--|---------|----------|--|------------------|-------------------------------|-------|
| X. ±0.35   | X.' ±2' | UNITS    | 东莞市腾兴电子有限公司  |                  |                               |       |
| .X ±0.3  | .X' ±1' | MAT'L    | TITLE:<br>Micro USB 3.0 B TYPE MALE<br>(Top Shell) |                  | PART NO.:<br>MUYM-105N-4BSS10 |       |
| .XX ±0.25  | .XX'    | SEE NOTE |  |                  |                               |       |
| .XXX ±0.15   | .XXX'   | FINISH   | DR: gan 2012/8/3                                   |                  | DWG NO.:<br>AII-SS10          |       |
| THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC |         |          |  |                  |                               |       |
| Q'TY   |         |          | CHKD: gan 2012/8/3                                 |                  | SCALE                         | SHEET |
|  |         |          | APPD:  |                  | 1:1                           | 1/1   |
|  |         |          | REV.   | CUSTOMER DRAWING |                               |       |
|  |         |          | B  |                  |                               |       |



RoHS  
Compliant  
2002/95/EC

| REV | LTR | DESCRIPTION | DATE | REVISER | APPD |
|-----|-----|-------------|------|---------|------|
|     |     |             |      |         |      |

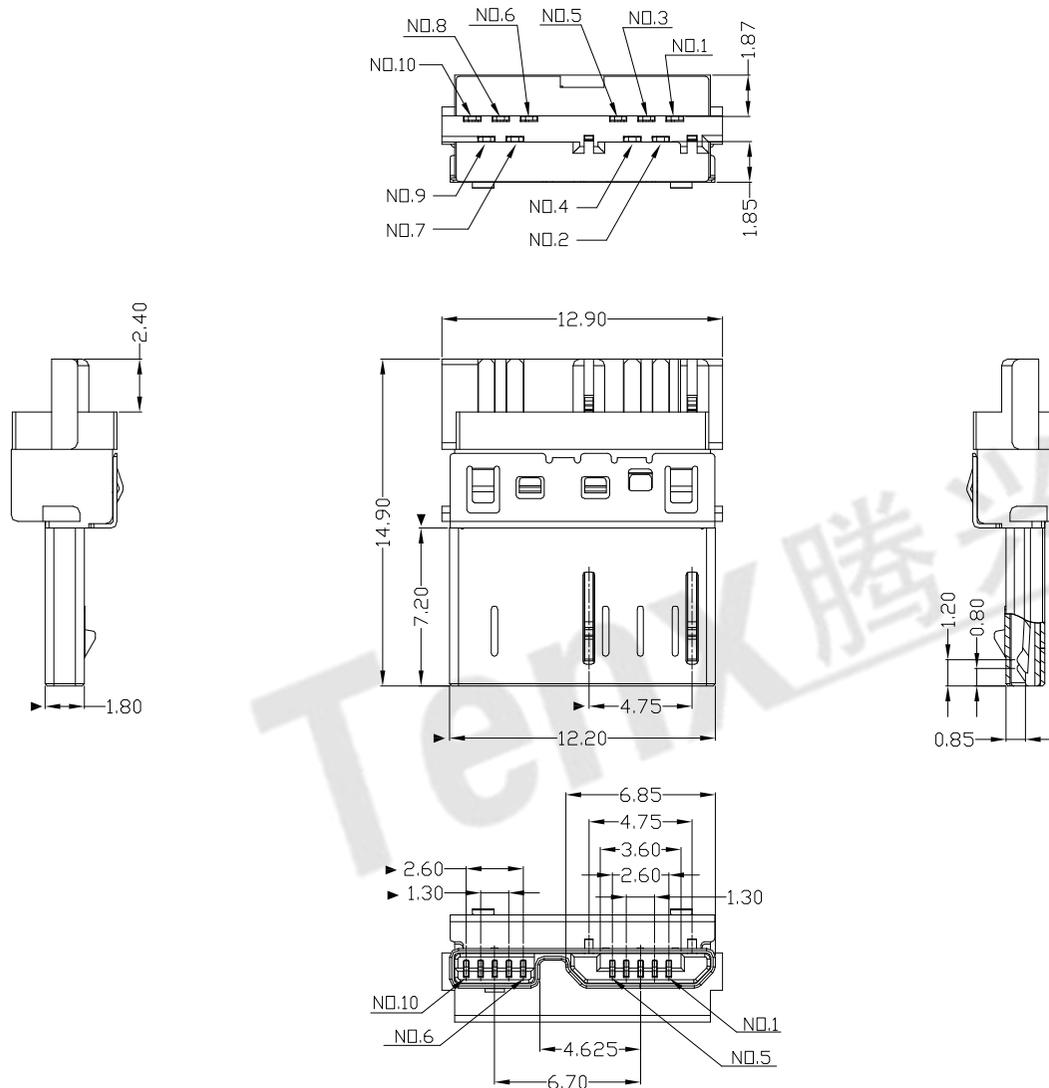

- NOTES:
- ELECTRICAL:
    - VOLTAGE CURRENT RATING: 1AMP, 30V AC;
    - INSULATION RESISTANCE: 100MΩ MIN;
    - CONTACT RESISTANCE: 30mΩ MAX;
    - WITHSTANDING VOLTAGE: 500V AC;
    - OPERATING TEMPERATURE: -40°C TO +85°C.
  - Mechanical:
    - Mating Force: 35N MAX
    - Unmating Force: 10N MIN.
  - NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
  - PART NO.

MUYM-105N-4BSS10


|          |         |
|----------|---------|
| 1Au 1U'  | W/WHITE |
| 5Au 15U' | B/BLACK |
| 6Au 30U' | 1PB1    |
|          | 2PA6T   |
|          | 3FA9T   |
|          | 4LCP    |

Bill of materials:

| NO | PARTS         | MATERIAL        | QTY | FINISHING       |   |         |        |          |
|----|---------------|-----------------|-----|-----------------|---|---------|--------|----------|
| 4  | HOOK          | STAINLESS STEEL | 1   | PLATED NICKEL   | X. ±0.35  | X.' ±2' | UNITS  | mm       |
| 3  | HOUSING SHELL | COPPER ALLOY    | 1   | PLATED NICKEL   | .X ±0.3   | .X' ±1' | MAT'L  | SEE NOTE |
| 2  | HOUSING       | LCP/PBT         | 1   | UL94V-0         | .XX ±0.25   | .XX'    | FINISH | SEE NOTE |
| 1  | TERMINAL      | COPPER ALLOY    | 10  | PLATED GOLD/TIN | .XXX ±0.15  | .XXX'   | Q'TY   | SEE NOTE |
| NO | PARTS         | MATERIAL        | QTY | FINISHING       | <small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC</small> |         |        |          |

东莞市腾兴电子有限公司


|                           |  |                            |       |      |                  |
|---------------------------|--|----------------------------|-------|------|------------------|
| TITLE: Micro USB 3.0 BM主体 |  | PART NO.: MUYM-105N-4BSS10 |       |      |                  |
| DR: gan 2012/8/3          |  | DWG NO.: AII-SS10          |       |      |                  |
| CHKD: gan 2012/8/3        |  | SCALE                      | SHEET | REV. | CUSTOMER DRAWING |
| APPD:                     |  | 1:1                        | 1/1   | B    |                  |





RoHS  
Compliant  
2002/95/EC

| REV | LTR | DESCRIPTION | DATE | REVISER | APPD |
|-----|-----|-------------|------|---------|------|
|     |     |             |      |         |      |

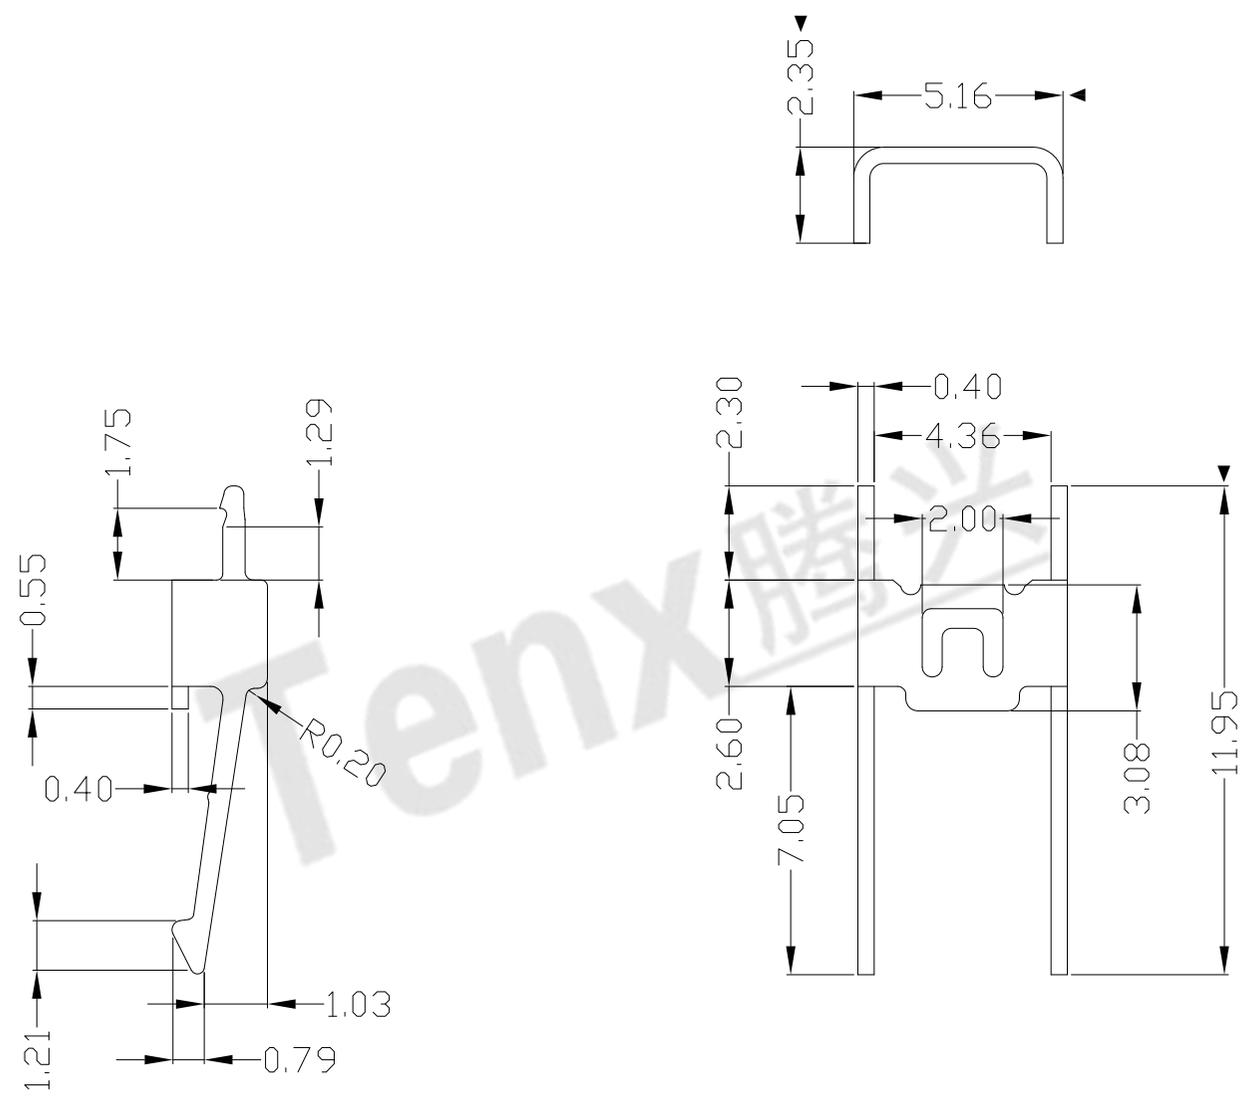

NOTES:  
1. Material:  
HOOK: STAINLESS STEEL Plating Ni  
2. NOTE: DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

|  |         |          |                         |                  |       |      |
|--|---------|----------|-------------------------|------------------|-------|------|
| X. ±0.35   | X.' ±2' | UNITS    | 东莞市腾兴电子有限公司             |                  |       |      |
| .X ±0.3  | .X' ±1' | MAT'L    |                         |                  |       |      |
| .XX ±0.25  | .XX'    | SEE NOTE | TITLE:                  | PART NO.:        |       |      |
| .XXX ±0.15   | .XXX'   | FINISH   | Micro USB 3.0 BM (HOOK) | MUYM-105N-4BSS10 |       |      |
| THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC. |         | SEE NOTE | DR:                     | DWG NO.:         |       |      |
|  |         | Q'TY     | gan 2012/8/3            | AII-SS10         |       |      |
|  |         | APPD:    | gan 2012/8/3            | SCALE            | SHEET | REV. |
|  |         |          |                         | 1:1              | 1/1   | B    |
|  |         |          |                         | CUSTOMER DRAWING |       |      |