

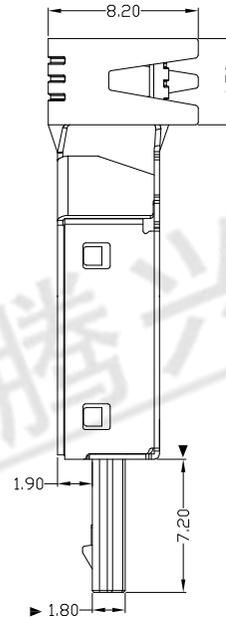



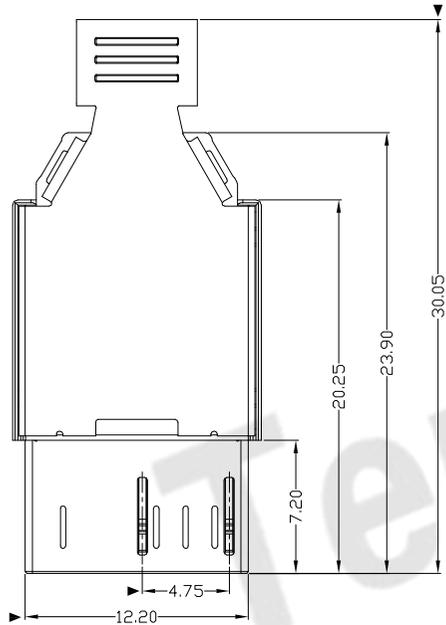

RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD



NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1AMP, 30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -40°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
- PART NO.

MUYM-105N-4BSS12

1-Au 1U'
5-Au 15U'
6-Au 30U'

W/WHITE
B/BLACK
1-PBT
2-PA6T
3-PA9T
4-LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING				
5	HOOK	STAINLESS STEEL	1	PLATED NICKEL	X. ±0.35	X.' ±2'	UNITS	mm
4	SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X' ±1'	MAT'L	
3	HOUSING SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX'	SEE NOTE	
2	HOUSING	LCP/PBT	1	UL94V-0	.XXX ±0.15	.XXX'	FINISH	
1	TERMINAL	COPPER ALLOY	10	PLATED GOLD/TIN			SEE NOTE	
							Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC



东莞市腾兴电子有限公司

TITLE: Micro USB 3.0 B TYPE MALE (半封槽)		PART NO.: MUYM-105N-4BSS12			
DR: gan 2012/8/3		DWG NO.: AII-SS12			
CHKD: gan 2012/8/3		SCALE	SHEET	REV.	CUSTOMER DRAWING
APPD:		1:1	1/1	B	



RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

A

B

C

D

E






A

B

C

D

E

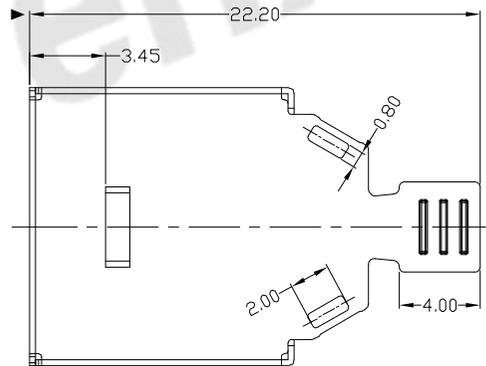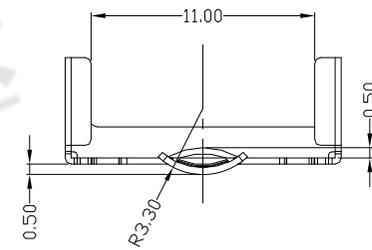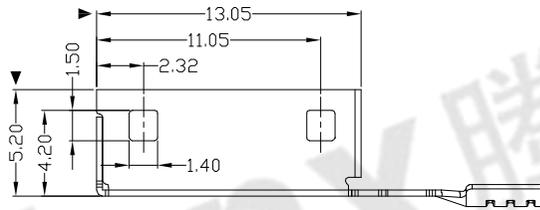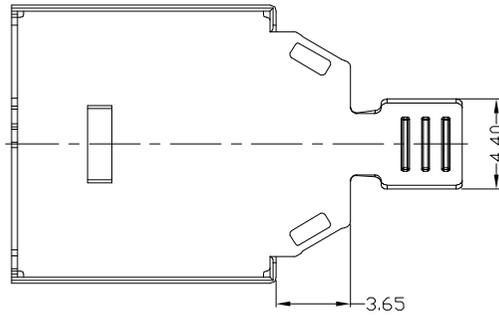

- NOTES:
 1. Material:
 Shell:SPCC Plating Ni
 2. NOTE: DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

X. ±0.35	X.' ±2'	UNITS	东莞市腾兴电子有限公司			
.X ±0.3	.X' ±1'	MAT'L	Micro USB 3.0 B TYPE MALE (半封槽) Bottom Shell			
.XX ±0.25	.XX'	SEE NOTE	DR: gan 2012/8/3		PART NO.: MUYM-105N-4BSS12	
.XXX ±0.15	.XXX'	FINISH	CHKD: gan 2012/8/3		DWG NO.: AII-SS12	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC		SEE NOTE	APPD:		SCALE	SHEET
		Q'TY			1:1	1/1
					REV.	CUSTOMER DRAWING
					B	

1

2

3

4

5





6

7



RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

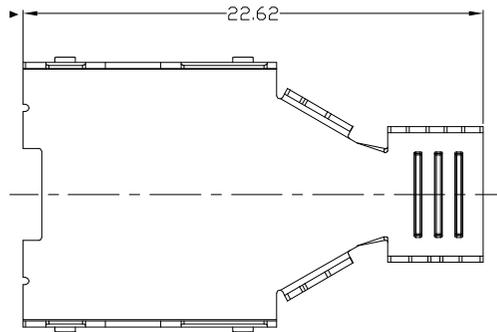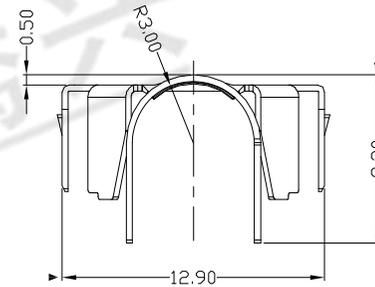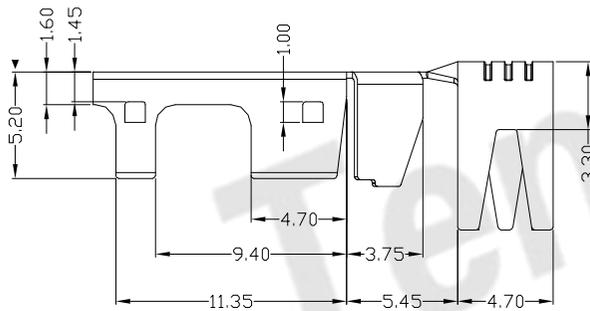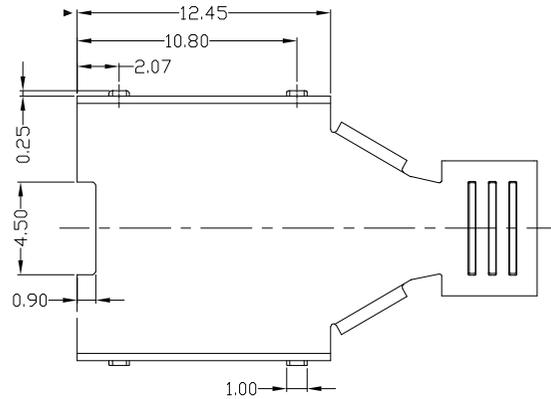






NOTES:
1. Material:
Shell: SPCC Plating Ni
2. NOTE: DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

X. ±0.35	X.* ±2°	UNITS	东莞市腾兴电子有限公司					
.X ±0.3	.X.* ±1°	MAT'L	TITLE: Micro USB 3.0 B TYPE MALE (半封槽) Top Shell					
.XX ±0.25	.XX*	SEE NOTE	DR: gan 2012/8/3		PART NO.: MUYM-105N-4BSS12			
.XXX ±0.15	.XXX*	FINISH	CHKD: gan 2012/8/3		DWG NO.: AII-SS12			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC		SEE NOTE	APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
		Q'TY			1:1	1/1	B	



RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

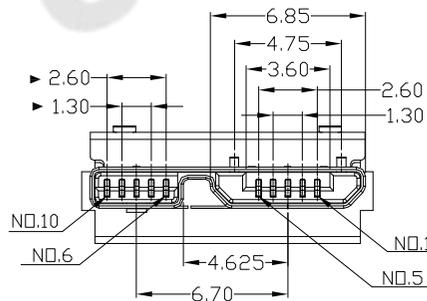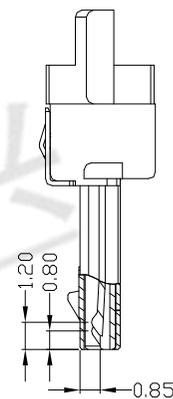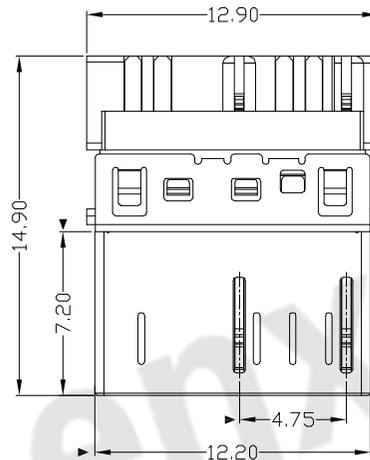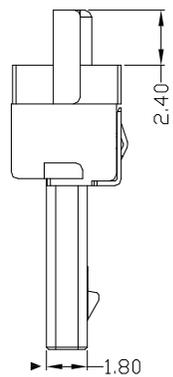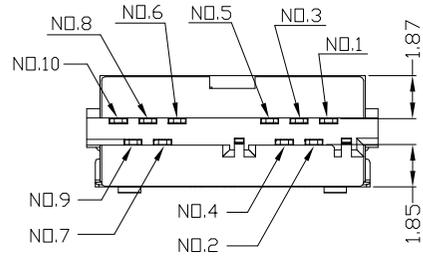

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1AMP, 30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -40°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE: DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

MUYM-105N-4BSS12


1Au 1U'
5Au 15U'
6Au 30U'

W/WHITE
B/BLACK
1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING				
4	HOOK	STAINLESS STEEL	1	PLATED NICKEL	X. ±0.35	X.' ±2'	UNITS	mm
3	HOUSING SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X' ±1'	MAT'L	SEE NOTE
2	HOUSING	LCP/PBT	1	UL94V-0	.XX ±0.25	.XX'	FINISH	SEE NOTE
1	TERMINAL	COPPER ALLOY	10	PLATED GOLD/TIN	.XXX ±0.15	.XXX'	Q'TY	SEE NOTE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC




东莞市腾兴电子有限公司

TITLE: Micro USB 3.0 B TYPE MALE (半封槽)主体	PART NO.: MUYM-105N-4BSS12
DR: gan 2012/8/3	DWG NO.: AII-SS12
CHKD: gan 2012/8/3	SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING



RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

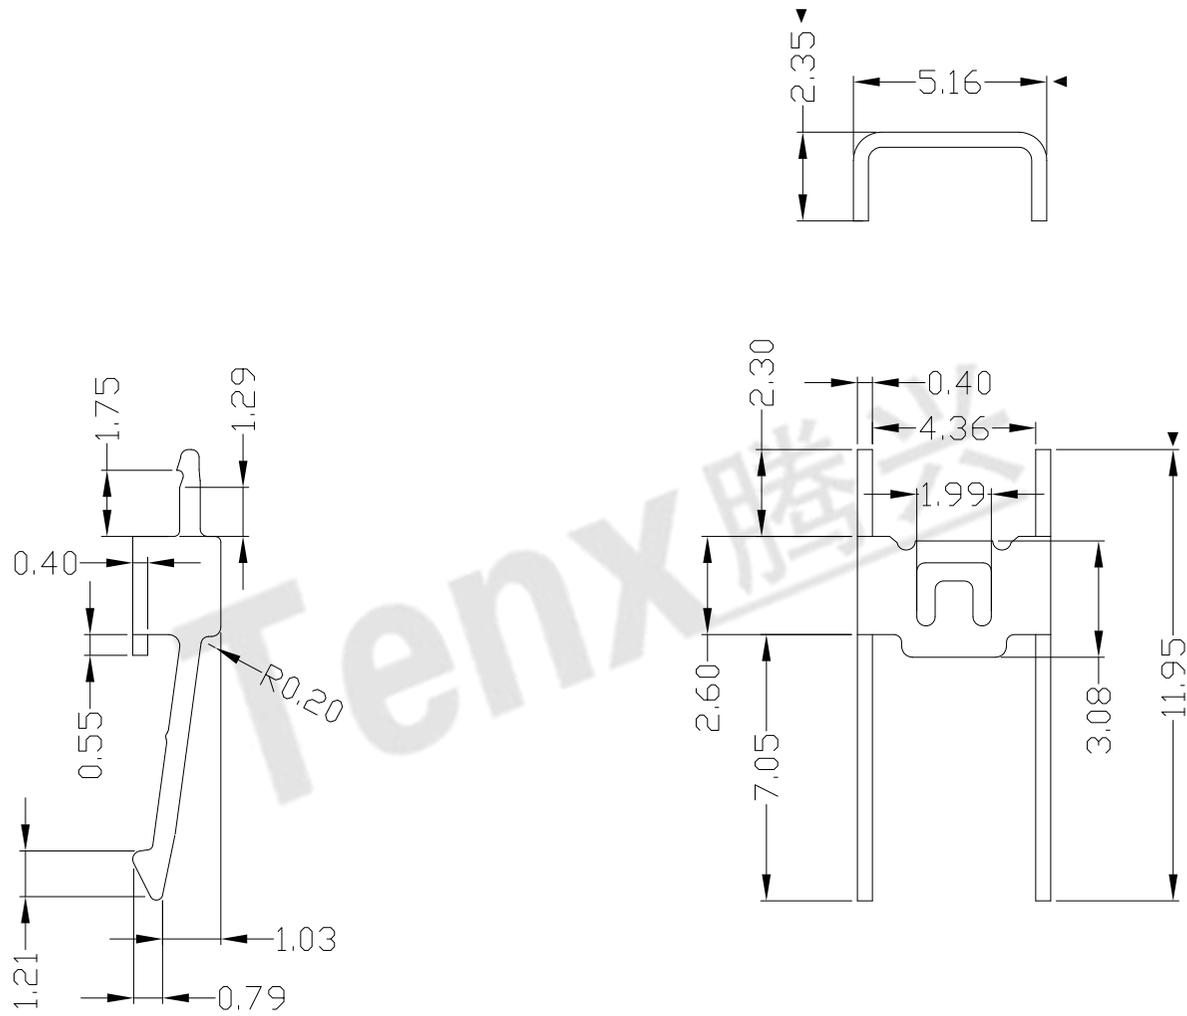

NOTES:
1.MATERIAL:
HOOK:STAINLESS STEEL Plating Ni
2.NOTE:DIMENSIONS MARKED "▼"
TOBE CHECKED BY Q.C & IPQC.

X. ±0.35	X.* ±2*	UNITS	东莞市腾兴电子有限公司						
.X ±0.3	.X* ±1*	MAT'L	TITLE: Micro USB 3.0 B TYPE MALE (半封槽)HOOK		PART NO.: MUYM-105N-4BSS12				
.XX ±0.25	.XX*	SEE NOTE							
.XXX ±0.15	.XXX*	FINISH	DR: gan 2012/8/3		DWG NO.: AII-SS12				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC			SEE NOTE	CHKD: gan 2012/8/3		SCALE	SHEET	REV.	CUSTOMER DRAWING
			Q'TY	APPD:		1:1	1/1	B	