




RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

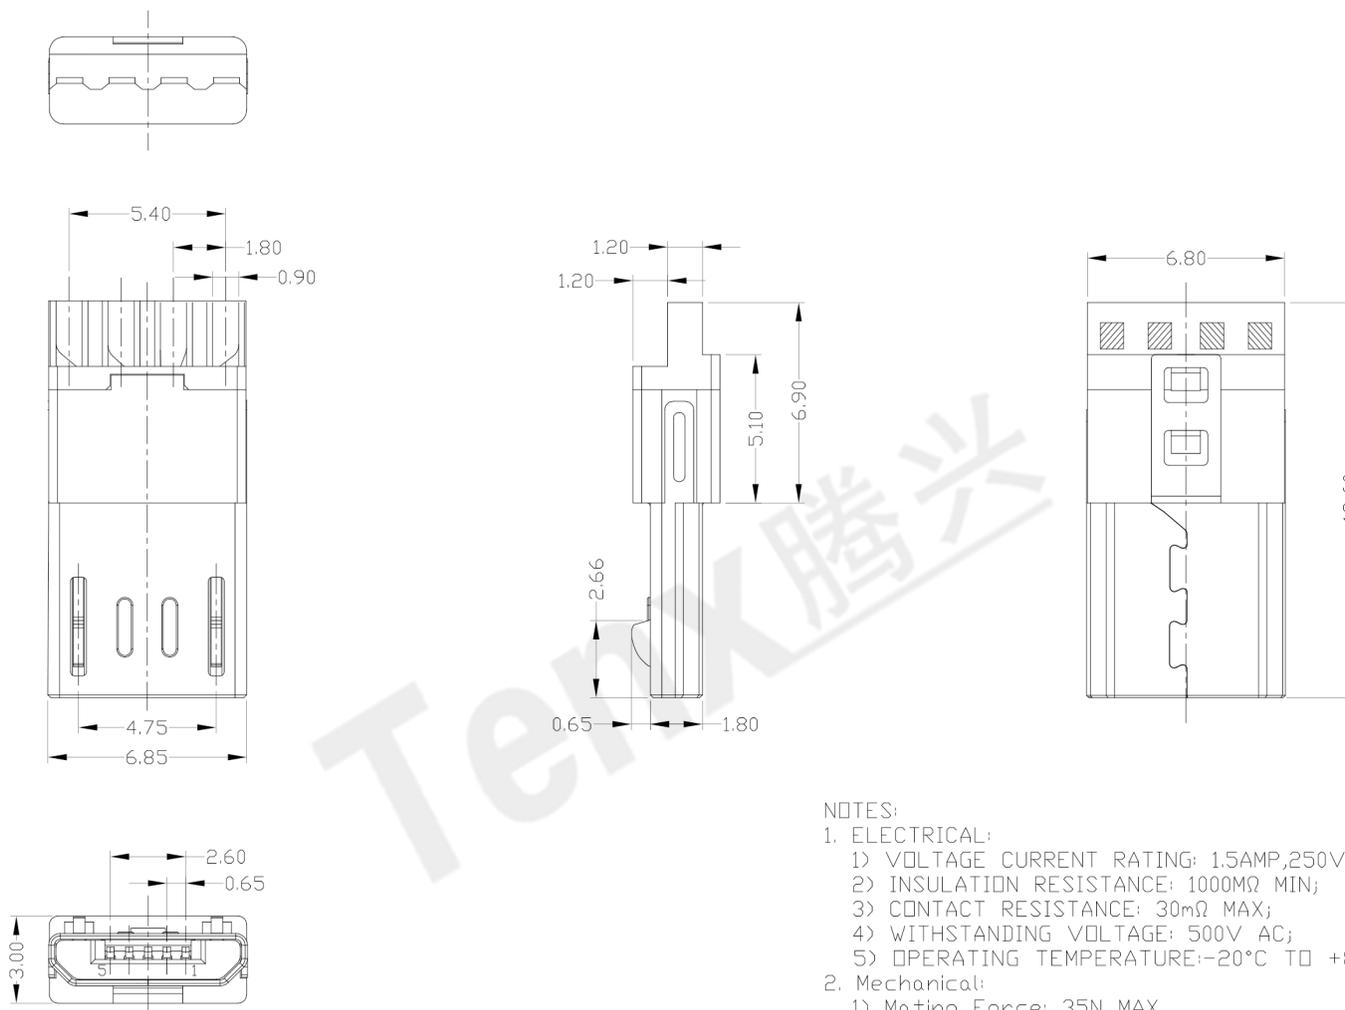

NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: 1.5AMP,250V AC;
  - INSULATION RESISTANCE: 1000MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 500V AC;
  - OPERATING TEMPERATURE:-20°C TO +85°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Umating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

MUYM-05\*N-4BSH16  
 1:Au 1U\*  
 6:Au 30U\*  
 W:WHITE  
 B:BLACK  
 1:PBT  
 2:PA6T  
 3:PA9T  
 4:LCF

Bill of materials:

4	HOOK	STAINLESS STEEL	2		X. ±0.3	X.' ±2'	UNITS	mm
3	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.2	.X' ±1'	MAT'L	
2	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XX ±0.15	.XX'	SEE NOTE	
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ±0.10	.XXX'	FINISH	SEE NOTE
NO	PARTS	MATERIAL	QTY	FINISHING	<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.</small>			

东莞市腾兴电子有限公司

TITLE: micro USB 5P公焊线3.0 不锈钢带两孔		PART NO.: MUYM-05*N-4BSH16	
DR: gan 2018/05/21		DWG NO.: AII-SH16	
CHKD: gan 2018/05/21		SCALE	SHEET
APPD:		1:1	1/1
		REV.	CUSTOMER DRAWING
		B	