

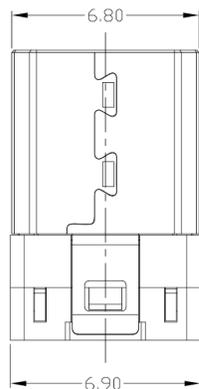

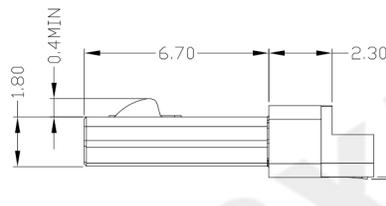





RoHS
Compliant
2002/95/EC

6	7	8	9	10	11
REV	LTR	DESCRIPTION	DATE	REVISER	APPD

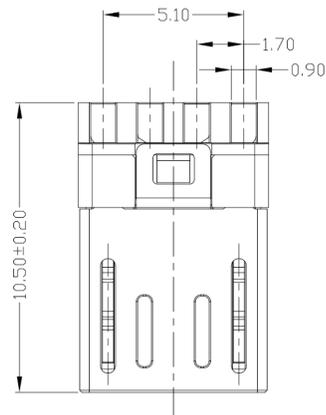

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.5AMP, 250V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 50V AC;
 - OPERATING TEMPERATURE: -20°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

MUYM-05*N-4BSH11

1:Au 1U*
6:Au 30U*

W:WHITE
B:BLACK

1:PB
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm
4	HOOK	STAINLESS STEEL	2		.X ±0.15	Ang1°
3	HOUSING	LCP+30%GF	1	UL94V-0	.XX ±0.10	
2	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XXX ±0.05	
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC

东莞市腾兴电子有限公司

TITLE: MICRO USB BM 超短10.5一排骨线式 前五后四(无弹 T=2.6)	PART NO.: MUYM-05*N-4BSH11
DR: Ricky 2018/1/31	DWG NO.: AII-SH111
CHKD: Ricky 2018/1/31	SCALE SHEET REV. CUSTOMER 4:1 1/1 B DRAWING
APPD:	