


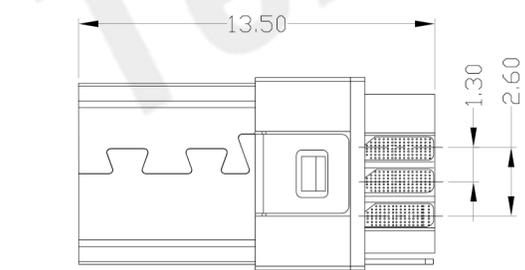
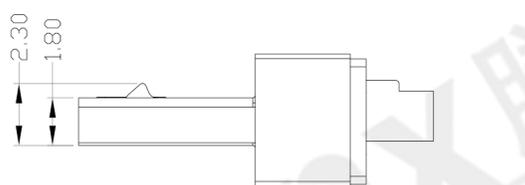




RoHS Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

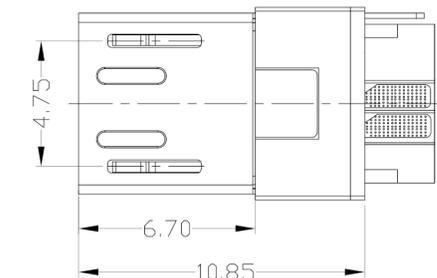

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 0.5AMP,100V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 250V AC;
 - OPERATING TEMPERATURE:-30°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
 - PART NO.

MUYM-051N-4BSS14

1: Au 1U*
6: Au 30U*

1: WHITE
B: BLACK

1: PBT
2: PA6T
3: PA6T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
4	HOOK	STAINLESS STEEL	1	
3	HOUSING	LCP+30%GF	1	UL94V-0
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN

X. ±0.3	X.' ±2'	UNITS	mm
.X ±0.2	.X' ±1'	MAT'L	
.XX ±0.15	.XX'	SEE NOTE	
.XXX ±0.10	.XXX'	FINISH	
		SEE NOTE	
		Q'TY	

东莞市腾兴电子有限公司

TITLE:	MICRO 5P B公焊线一体式 H5.0	PART NO.:	MUYM-051N-4BSS14
DR:	gan 2015/12/08	DWG NO.:	AII-SS14
CHKD:	gan 2015/12/08	SCALE	SHEET
APPD:		1:1	1/1
		REV.	B
		CUSTOMER DRAWING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.

