




RoHS Compliant
2002/95/EC

6	7	REV	LTR	DESCRIPTION	DATE	REVISER	APPD

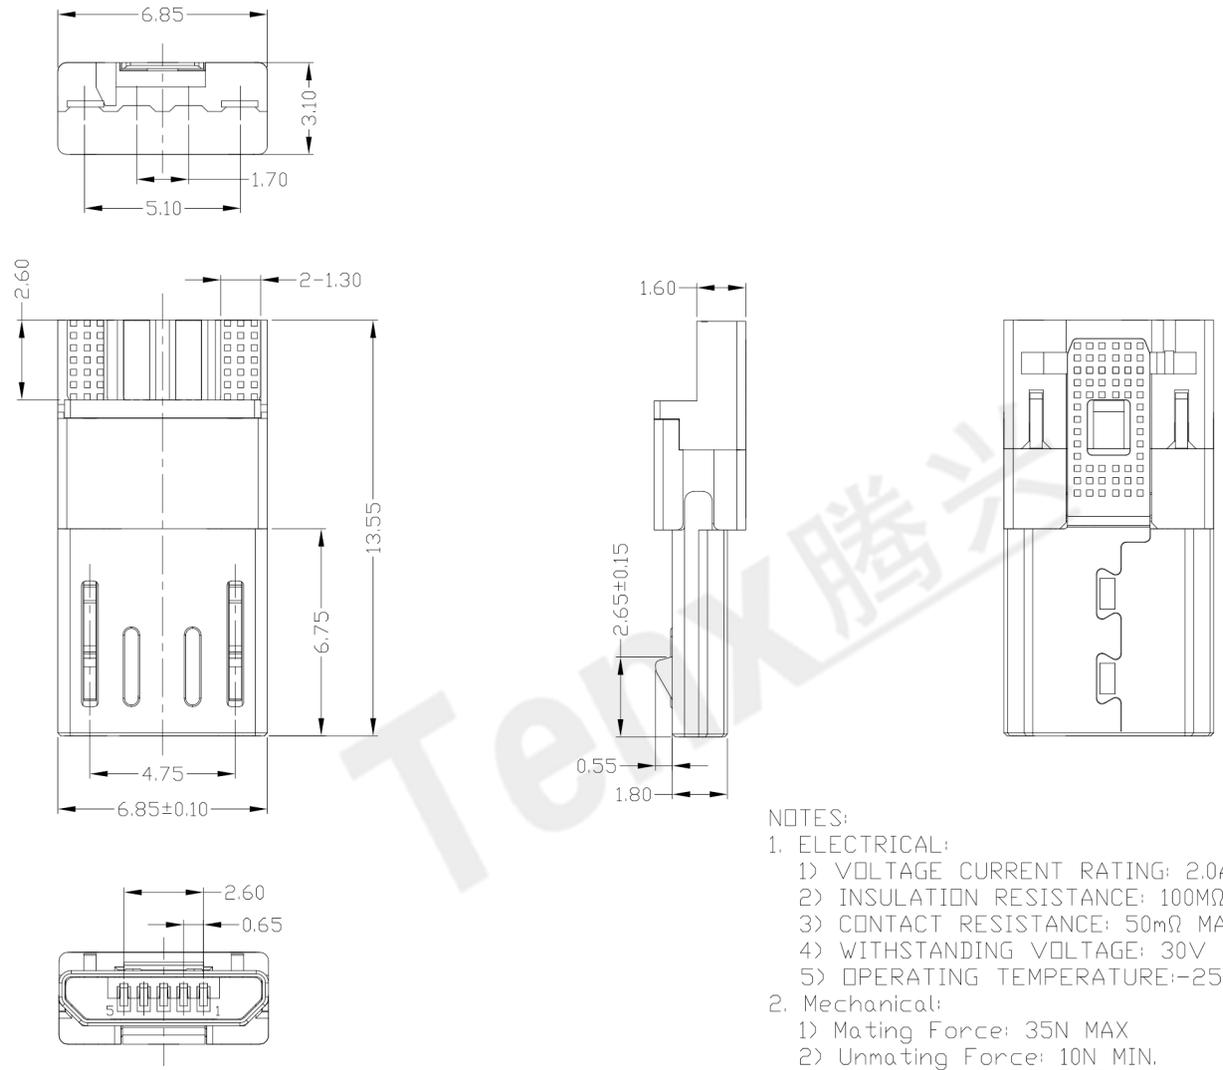

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2.0AMP,100V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 30V AC;
 - OPERATING TEMPERATURE:-25°C TO +80°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
MUYM-05*N-4BSU04

1:1Au 1U*
6:1Au 30U*

W:WHITE
B:BLACK
1:PB
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
4	HOOK	STAINLESS STEEL	2	X ±0.15 Ang1°
3	HOUSING	LCP+30%GF	1	.XX ±0.10
2	SHELL	STAINLESS STEEL	1	.XXX ±0.05
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN
				THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC

东莞市腾兴电子有限公司

TITLE: MICRO USB BM 一排焊线式 前五后二 (T=3.1)焊盘加宽		PART NO.: MUYM-05*N-4BSU04	
DR: Ricky 2018/1/31		DWG NO.: AII-SU04	
CHKD: Ricky 2018/1/31		SCALE	SHEET
APPD:		4:1	1/1
		REV.	CUSTOMER DRAWING
		B	