







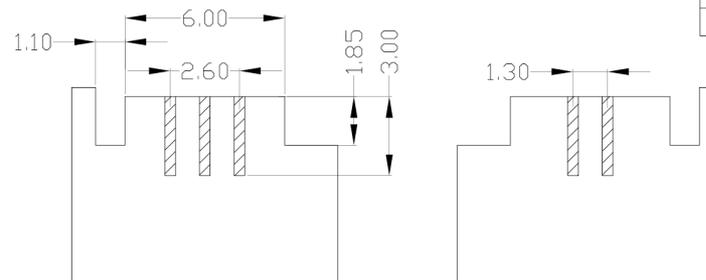


RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.



RECOMMENDED PCB LAYOUT

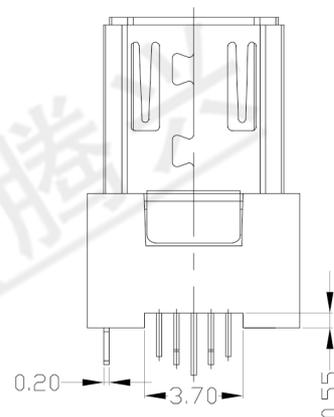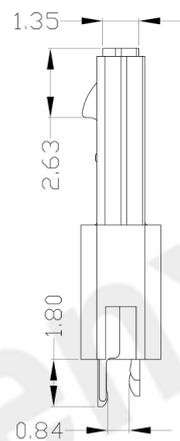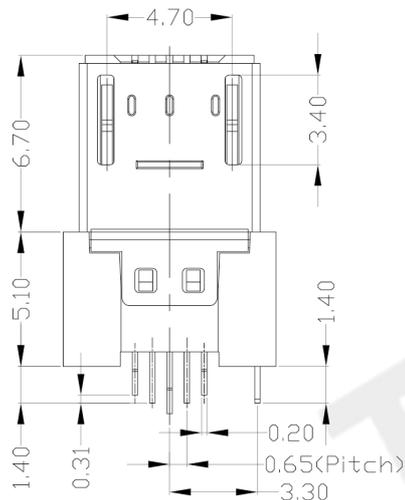

NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: 1.5AMP,250V AC;
  - INSULATION RESISTANCE: 1000MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 500V AC;
  - OPERATING TEMPERATURE:-20°C TO +85°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
- DIMENSIONS MARKED '▼' TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUYM-05\*N-5BSH11

- 1:Au 1U'
- 6:Au 30U'
- W:WHITE
- B:BLACK
- 1:PBT
- 2:PA6T
- 3:PA9T
- 4:LCP
- 5:PA46

4	HOOK	STAINLESS STEEL	1	
3	HOUSING	PA46	1	
2	SHELL	STAINLESS STEEL	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN
NO	PARTS	MATERIAL	QTY	FINISHING

X. ±0.3	X.* ±2*	UNITS	mm
.X ±0.2	.X* ±1*	MAT'L	
.XX ±0.15	.XX*	SEE NOTE	
.XXX ±0.10	.XXX*	FINISH	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE	
		Q'TY	

<b>东莞市腾兴电子有限公司</b>			
TITLE: MICRO USB 5P/M 超薄夹板式		PART NO.: MUYM-05*N-5BSH11	
DR: gan 2012/7/11		DWG NO.: AII-SH11	
CHKD: gan 2012/7/11		SCALE	SHEET
APPD:		1:1	1/1
		REV.	CUSTOMER DRAWING
		B	