




**RoHS  
Compliant**  
2002/95/EC

REV.	ECN. NO.	APPD.

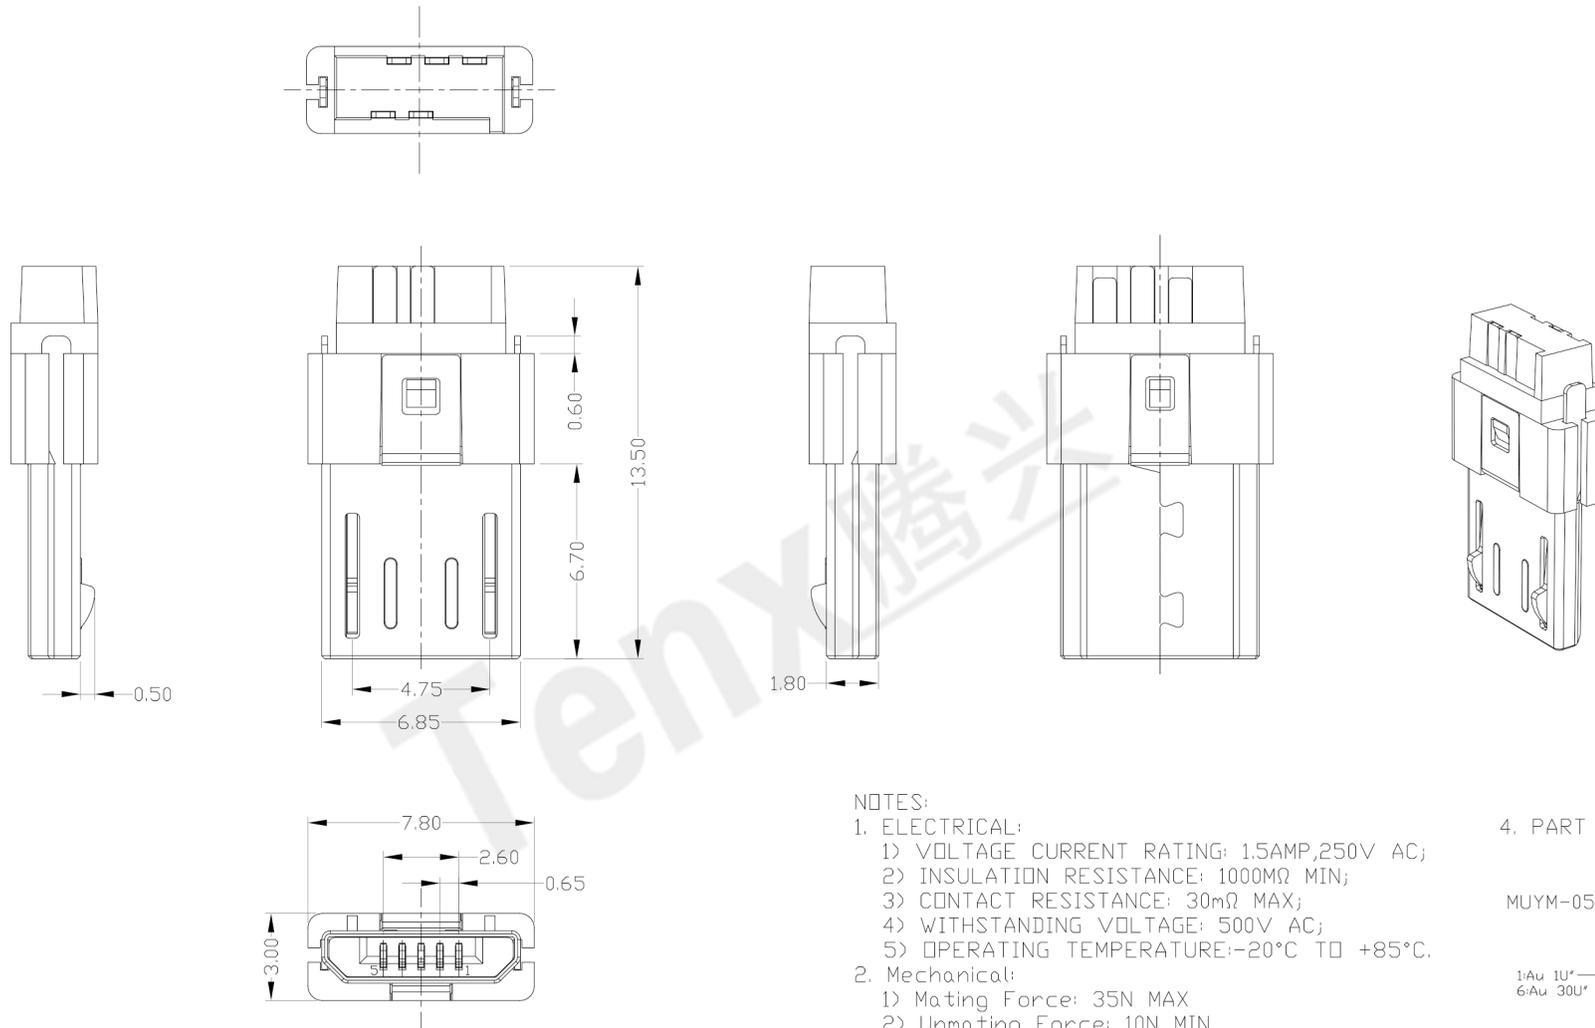

**NOTES:**  
 1. ELECTRICAL:  
 1) VOLTAGE CURRENT RATING: 1.5AMP,250V AC;  
 2) INSULATION RESISTANCE: 1000MΩ MIN;  
 3) CONTACT RESISTANCE: 30mΩ MAX;  
 4) WITHSTANDING VOLTAGE: 500V AC;  
 5) OPERATING TEMPERATURE:-20°C TO +85°C.  
 2. Mechanical:  
 1) Mating Force: 35N MAX  
 2) Unmating Force: 10N MIN.  
 3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.  
 MUYM-05\*N-5BSH15  
 1:Au 1U\*  
 6:Au 30U\*  
 W:WHITE  
 B:BLACK  
 1:PBT  
 2:PA6T  
 3:PA9T  
 4:LCP  
 5:PA46

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
5	PLUG	LCP+30%GF	1	UL94V-0
4	HOOK	STAINLESS STEEL	2	
3	HOUSING	PA46+30%GF	1	
2	SHELL	STAINLESS STEEL	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN

X.	X' ±2'	UNITS	mm
.X ±0.2	.X' ±1'	MAT'L	
.XX ±0.15	.XX'	SEE NOTE	
.XXX ±0.10	.XXX'	FINISH	
		SEE NOTE	
		Q'TY	

**东莞市腾兴电子有限公司**

TITLE: Micro 5P 超薄成型式		PART NO.: MUYM-05*N-5BSH15	
DR: Ricky 2014/04/23		DWG NO.: AII-SH15	
CHKD: Ricky 2014/04/23		SCALE	SHEET
APPD:		1:1	1/1
		REV. B	CUSTOMER DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.