




RoHS
Compliant
2002/95/EC

6	7	8	9	10	11
REV	LTR	DESCRIPTION	DATE	REVISER	APPD

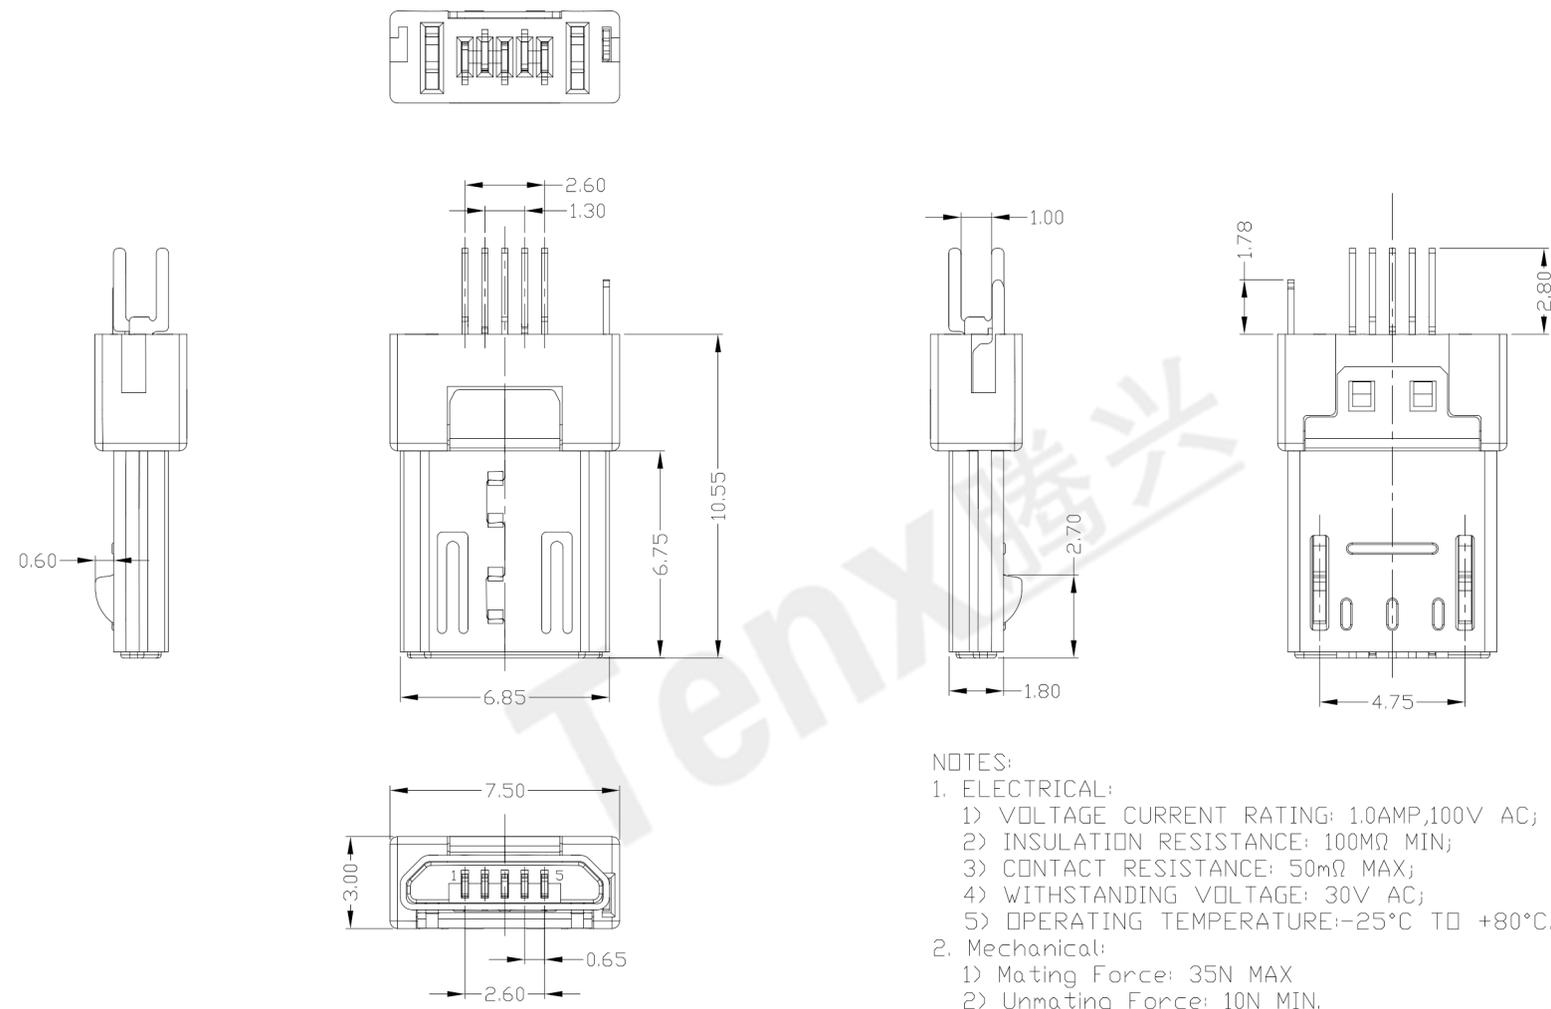

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,100V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 30V AC;
 - OPERATING TEMPERATURE:-25°C TO +80°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
MUYM-05*N-5BSU07

1:Au 1U*
6:Au 30U*

W:WHITE
B:BLACK
1:PB
2:PA6T
3:PA9T
4:LCP
5:PA46

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING				
4	HOOK	STAINLESS STEEL	2		.X ±0.15	Ang1°	UNITS	mm
3	HOUSING	PBT/PA46+30%GF	1	UL94V-0	.XX ±0.10		MAT'L	
2	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XXX ±0.05		SEE NOTE	
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN			FINISH	SEE NOTE
							Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC

东莞市腾兴电子有限公司

TITLE: MICRO USB BM 单脚双弹夹板式(T=3.0)	PART NO.: MUYM-05*N-5BSU07
DR: Ricky 2018/1/31	DWG NO.: AII-SU07
CHKD: Ricky 2018/1/31	SCALE SHEET REV. CUSTOMER DRAWING
APPD:	4:1 1/1 B