

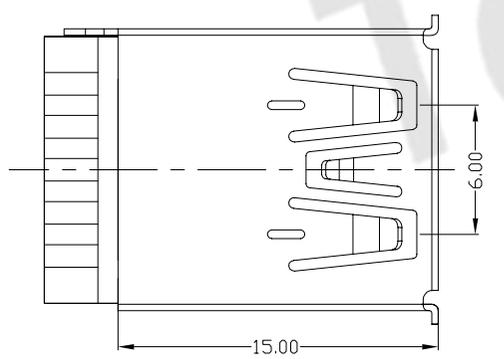
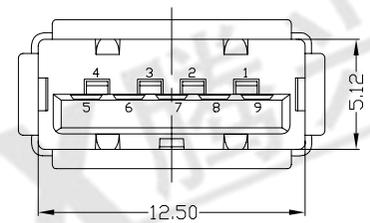


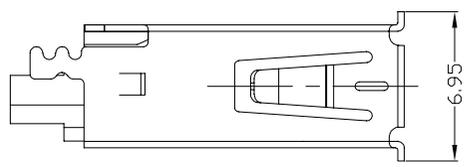

RoHS  
Compliant  
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

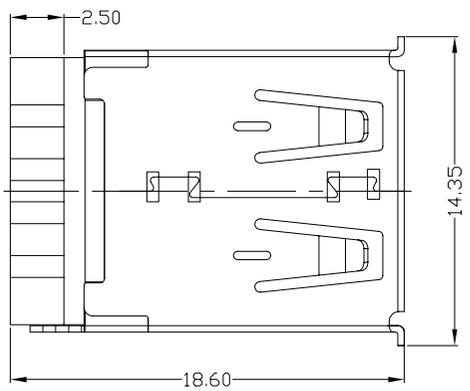


PIN NUMBER	SIGNAL NAME
1	V BUS
2	D-
3	D+
4	GND
5	STDA_SSRX-
6	STDA_SSRX+
7	GND_DRAIN
8	STDA_SSTX-
9	STDA_SSTX+
Shell	Shield

NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: 1.5AMP, 30V AC;
  - INSULATION RESISTANCE: 1000MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 500V R.M.S.;
  - OPERATING TEMPERATURE: -40°C TO +85°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

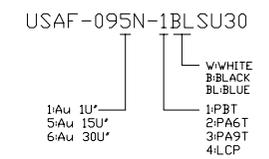






Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市腾兴电子有限公司				
3	HOUSING	PBT+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'	SEE NOTE	TITLE: USB 3.0 AF 焊線180度 普通款		PART NO.: USAF-095N-1BLSU30	
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X' ±1'					
1	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	.XX ±0.25	.XX'	FINISH	DR: gan 2013/3/6	SCALE: 1:1 SHEET: 1/1 REV: B CUSTOMER DRAWING		
					.XXX ±0.15	.XXX'	SEE NOTE	CHKD: gan 2013/3/6			
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC		Q'TY	APPD:			



RoHS  
Compliant  
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

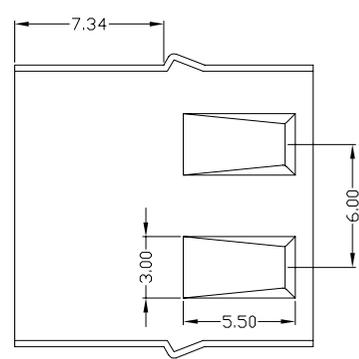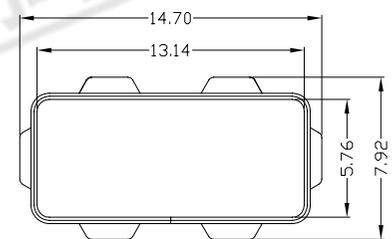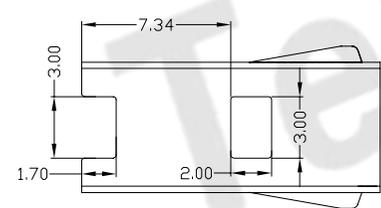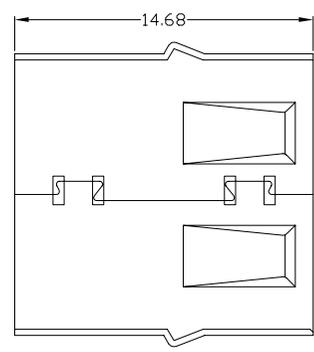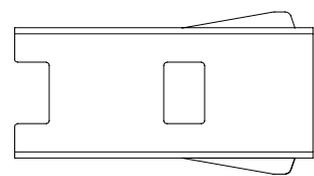

NOTE:  
1.Material: SPCC  
2.Finish: PLATED NICKEL

X. ±0.35	X.* ±2*	UNITS	mm	<b>东莞市腾兴电子有限公司</b>				
.X ±0.3	.X.* ±1*	MAT'L	SEE NOTE					TITLE:
.XX ±0.25	.XX*	FINISH	SEE NOTE	DR:	USAF-09XN-1BLSU30-C			
.XXX ±0.15	.XXX*	Q'TY	SEE NOTE	CHKD:	USAF-09XN-1BLSU30-C			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC				APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
				gan 2013/3/6	1:1	1/1	B	