

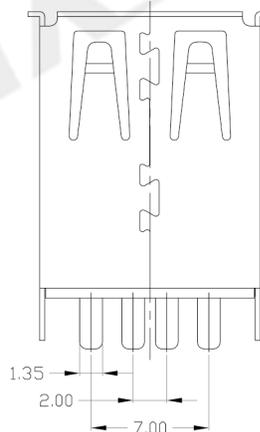


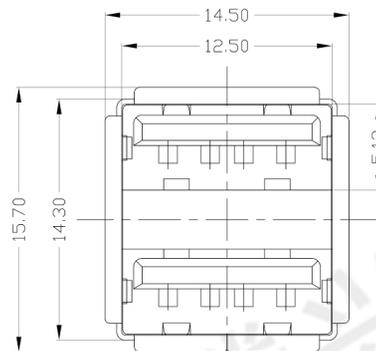

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

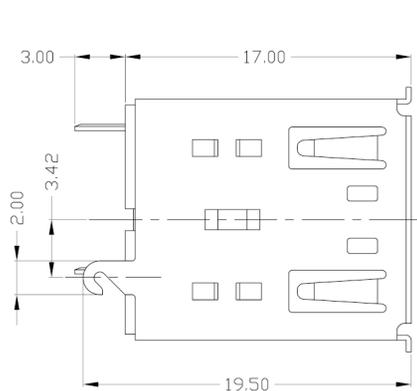

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING:1AMP,30V AC;
 - INSULATION RESISTANCE: 1000M Ω MIN;
 - CONTACT RESISTANCE: 30m Ω MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-45°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
- PART NO.

USAF-08*N-1*S31

1:1Au 1U*
6:4u 30U*
W:WHITE
B:BLACK
1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm
4	CLIP	COPPER ALLOY	1	PLATED NICKEL	X. ± 0.35	X.' $\pm 2^*$
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ± 0.3	.X' $\pm 1^*$
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ± 0.25	.XX'
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN	.XXX ± 0.15	.XXX'
					SEE NOTE	
					SEE NOTE	
					Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	

东莞市腾兴电子有限公司

TITLE:	USB AF 180° 双层焊线 (长体)	PART NO.:	USAF-08*N-1*S31
DR:	gan 2015/09/21	DWG NO.:	AII-S31
CHKD:	gan 2015/09/21	SCALE	1:1
APPD:		SHEET	1/1
		REV.	B
		CUSTOMER DRAWING	