




RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

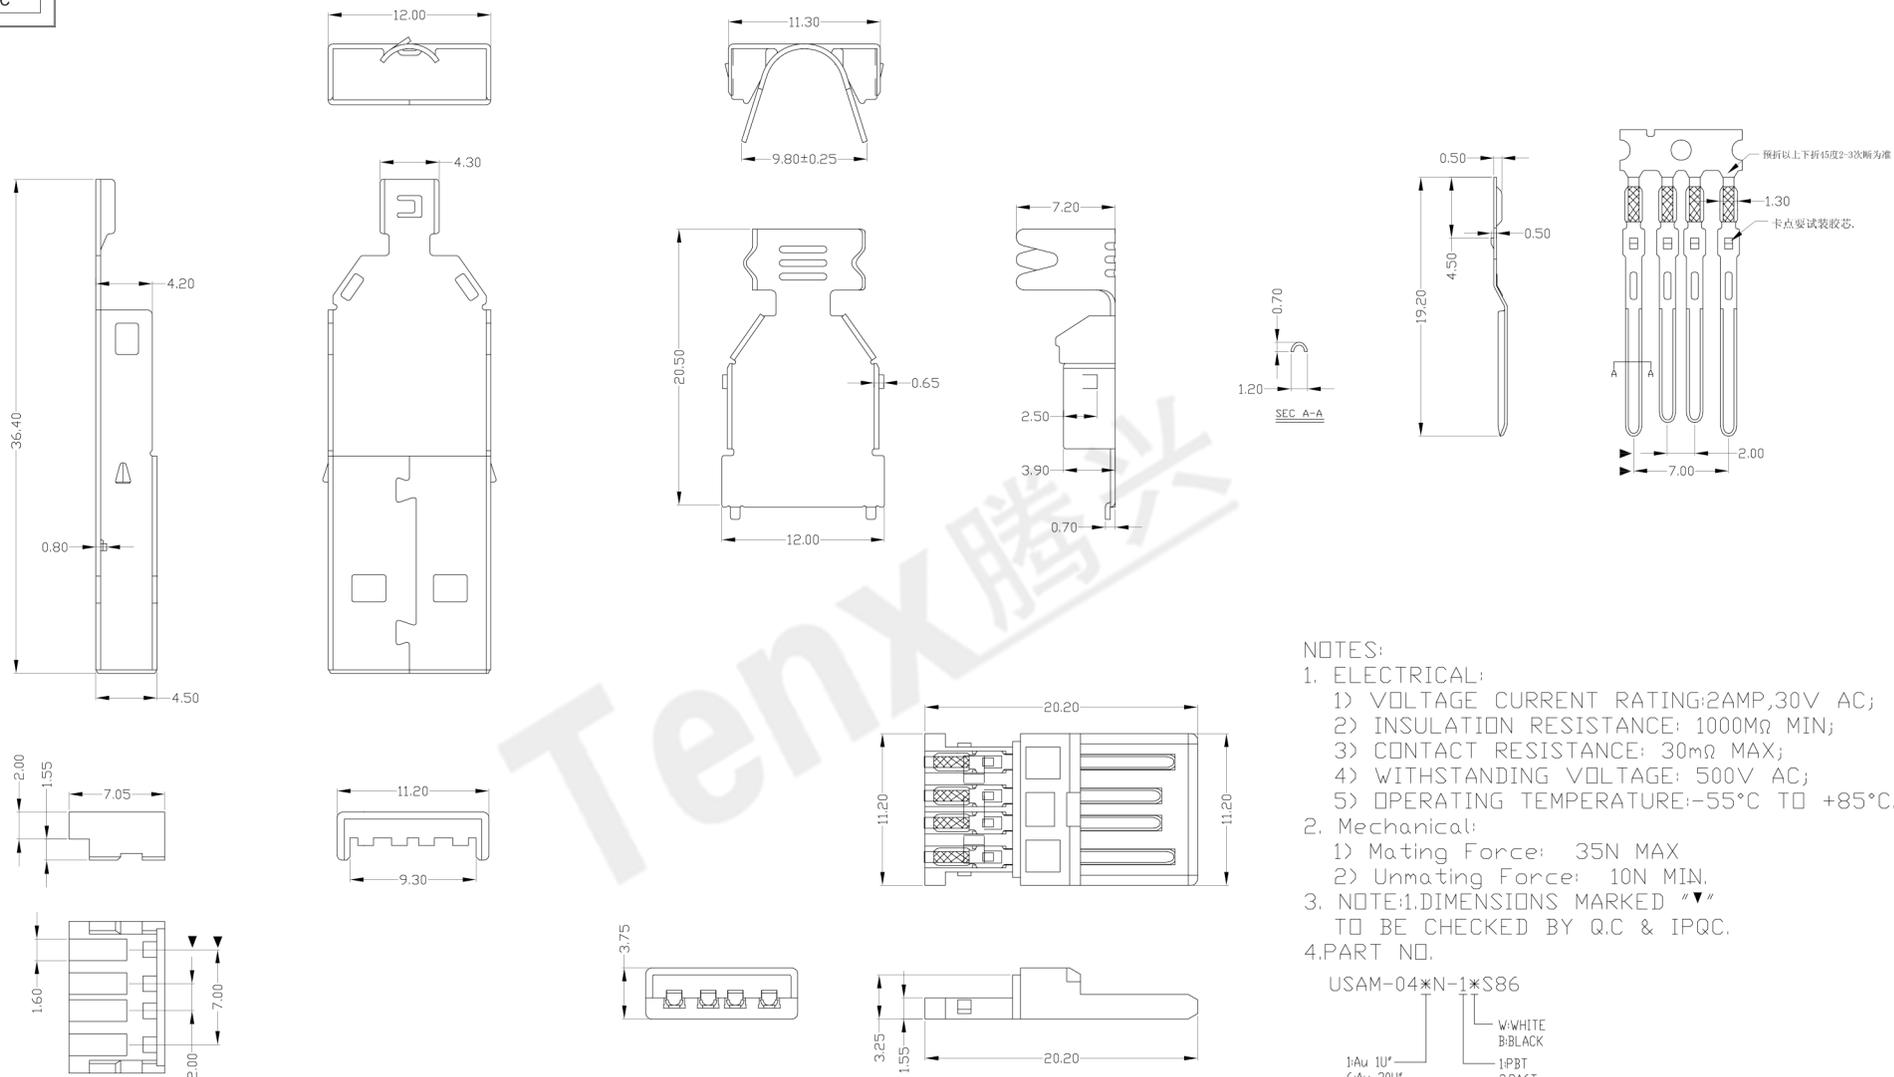

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000Ω MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - NOTE: 1. DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.
 - PART NO.

USAM-04*N-1*S86

- 1: Au 10 μ
- 6: Au 30 μ
- W: WHITE
- B: BLACK
- 1: PBT
- 2: PA6T
- 3: PA9T
- 4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING				
4	HOUSING	PBT	1	UL94V-0	X. \pm 0.35	X.* \pm 2*	UNITS	mm
3	UP SHELL	SPCC	1	PLATED NICKEL	.X \pm 0.3	.X* \pm 1*	MAT'L	
2	DOWN SHELL	SPCC	1	PLATED NICKEL	.XX \pm 0.25	.XX*	SEE NOTE	
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX \pm 0.15	.XXX*	FINISH	SEE NOTE
							Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.

东莞市腾兴电子有限公司

TITLE: USB A/M 长体蝴蝶扣弧线型大线夹 (四件套)	PART NO.: USAM-04*N-1*S86
DR: gan 2012/7/04	DWG NO.: AII-S86
CHKD: gan 2012/7/04	SCALE SHEET REV. CUSTOMER DRAWING
APPD:	1:1 1/1 B