




RoHS Compliant
2002/95/EC

Halogen Free


REV	LTR	DESCRIPTION	DATE	REVISER	APPD

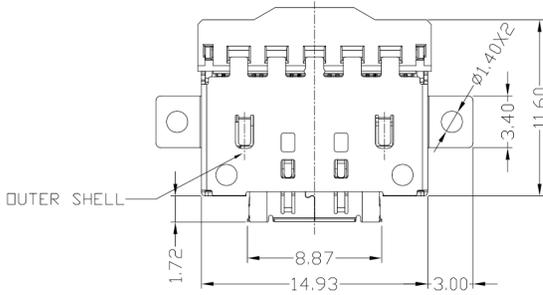




PIN NO.	SIGNAL NAME
A1	GND
A2	SSTXp1
A3	SSTXn1
A4	VBUS
A5	CC1
A6	D+
A7	D-
A8	SBU1
A9	VBUS
A10	SSRXn2
A11	SSRXp2
A12	GND

PIN NO.	SIGNAL NAME
B12	GND
B11	SSRXp1
B10	SSRXn1
B9	VBUS
B8	SBU2
B7	D-
B6	D+
B5	CC2
B4	VBUS
B3	SSTXn2
B2	SSTXp2
B1	GND

PIN Assignment

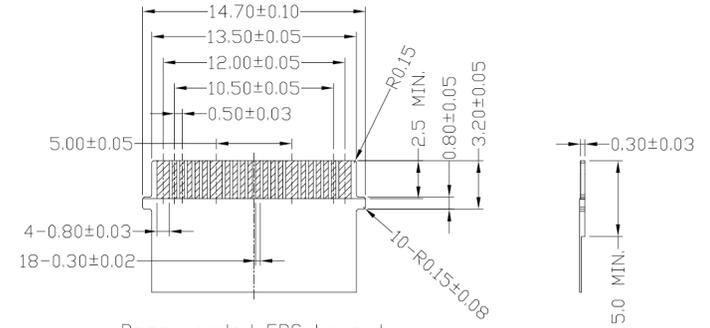

Recommended FPC Layout
(Impedance :85±9Ω)

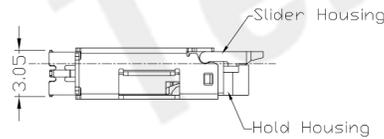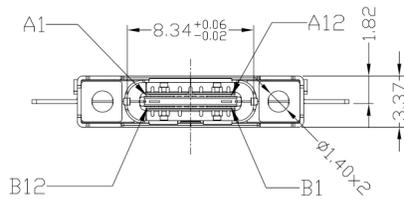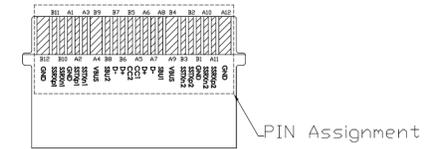

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 5AMP,20V AC/DC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC/1minute;
 - OPERATING TEMPERATURE: -25°C TO +85°C.
- MECHANICAL:
 - Mating Force: 5N~20N MAX.
 - Unmating Force: 8N~20N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USCF-263N-3BSS30
 1:Au 1U"
 5:Au 5U"
 6:Au 30U"
 W:WHITE
 B:BLACK
 1PBT
 2PA6T
 3PA9T
 4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
7	OUTER SHELL	STAINLESS STEEL	1	PLATED NICKEL/GOLD
6	EMI SHELL	STAINLESS STEEL	1	PLATED NICKEL
5	GROUND PLATES	COPPER ALLOY	1	PLATED TIN
4	CONTACT	COPPER ALLOY	26	PLATED GOLD
3	SLIDER HOUSING	LCP+30%GF	1	BLACK/UL94V-0
2	HOLD HOUSING	PA66+30%GF	1	NATURAL/UL94V-0
1	HOUSING	PA9T+30%GF	1	BLACK/UL94V-0

X ±0.25	X.' ±2'	UNITS	mm
.XX ±0.15	.X' ±1'	MAT'L	
.XXX ±0.05	.XX'	SEE NOTE	
	.XXX'	FINISH	
		SEE NOTE	
		Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVTECH INC

东莞市腾兴电子有限公司

TITLE: USB 3.1 TYPE C F SOLDER 沉板 26PIN 单排	PART NO.: USCF-263N-3BSS30
DR: Ricky 2017/10/05	DWG NO.: AII-SS30
CHKD: Ricky 2017/10/05	SCALE SHEET REV. CUSTOMER DRAWING
APPD:	1:1 1/1 B DRAWING