

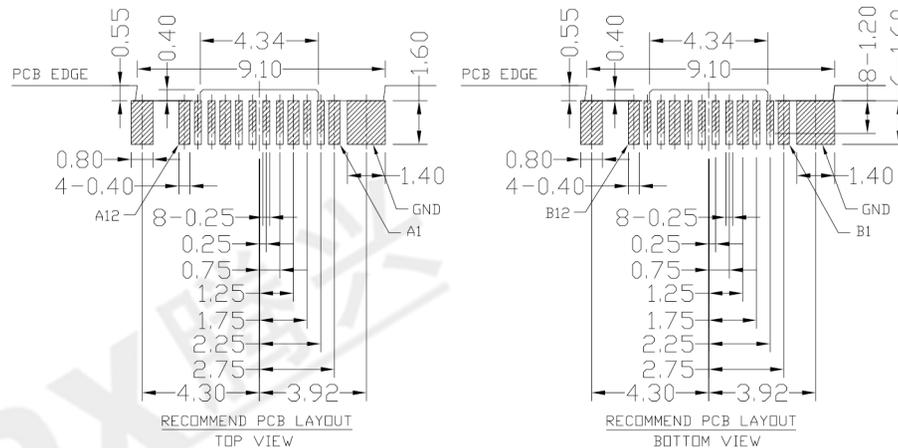
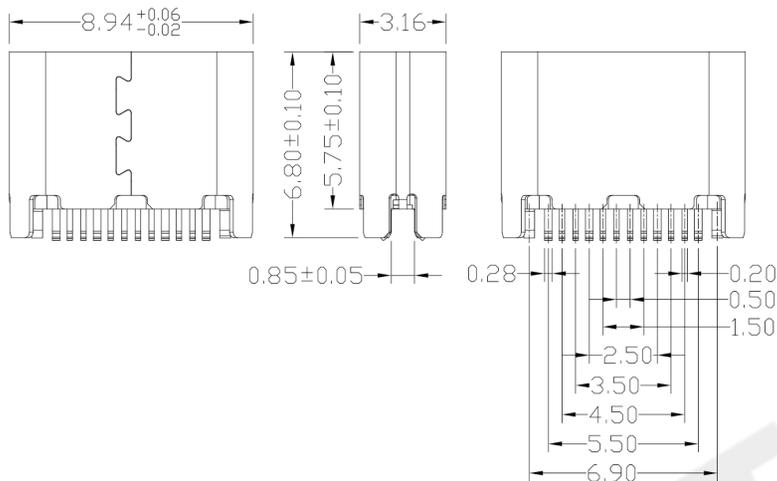


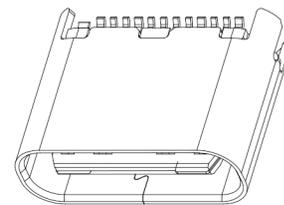


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

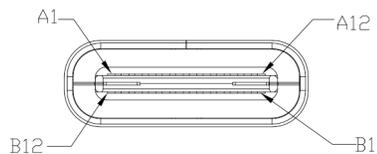

RECOMMENDED P.C.B. LAYOUT (T:0.80mm)
TOLERANCE UNSPECIFIED ±0.05mm

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND

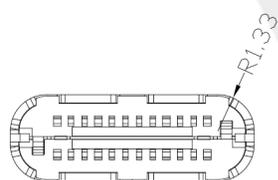

NOTES:
1.ELECTRICAL:
1)VOLTAGE CURRENT RATING: 5A FOR VBUS;
1.25A FOR GND PIN. 0.25A FOR OTHER. 20V MAX.
2)INSULATION RESISTANCE: 100MΩ MIN;
3)CONTACT RESISTANCE: 40mΩ MAX;
4)WITHSTANDING VOLTAGE: 100V AC R.M.S.
5)OPERATING TEMPERATURE:-25°C TO +85°C.
2.Mechanical:
1)Mating Force: 5N~20N
2)Unmating Force: 8N~20N
3)Durability: 10,000 cycles
3.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USCF-24*N-4BHS24
W:WHITE
B:BLACK
1Au 1U'
2Au 3U'
5Au 15u'
6Au 30U'
1PBT
2PA6T
3PA9T
4LCP

5					
4	SHILD	STAINLESS STEEL	1		
3	SHIEL	STAINLESS STEEL	1	PLATED NICKEL	
2	CONTACT	COPPER ALLOY	24	PLATED GOLD/TIN	
1	MOLDING	LCP+30%GF	1	UL94V-0	
NO	PARTS	MATERIAL	QTY	FINISHING	

.X ±0.30	.X' ±2'	UNITS	mm
.XX ±0.20	.XX' ±1'	MAT'L	SEE NOTE
.XXX ±0.10	.XXX' ±0.5'	FINISH	SEE NOTE
		Q'TY	

东莞市腾兴电子有限公司

TITLE: USB Type-CF 夹板 0.85 短体 5.75

PART NO.: USCF-24XN-4BHS24

DR: Ricky 2019/08/14

CHKD: Ricky 2019/08/14

DWG NO.: AII-HS24

SCALE: 1:1

SHEET: 1/1

REV.: B

CUSTOMER DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC