



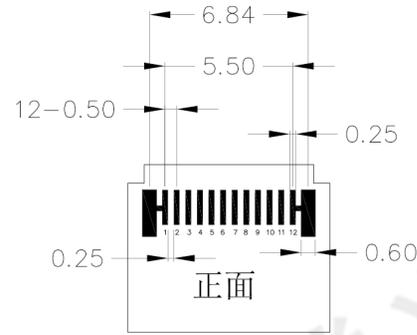




RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

PIN	A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
SIGNAL NAME	GND	RX2+	RX2-	Vbus	SBU1	D-	D+	CC	Vbus	TX1-	TX1+	GND
SIGNAL NAME	GND	TX2+	TX2-	Vbus	Vconn			SBU2	Vbus	RX1-	RX1+	GND
PIN	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

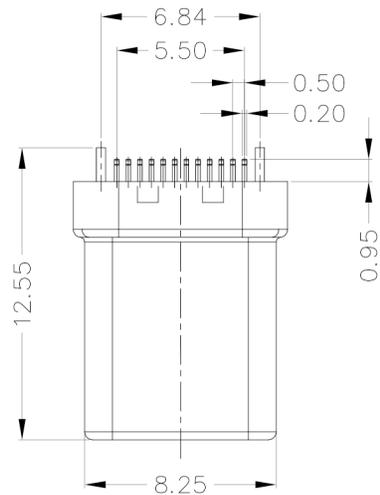


RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm

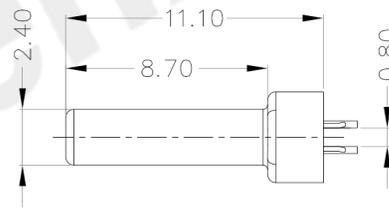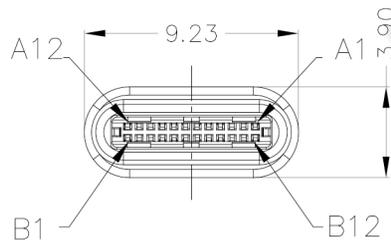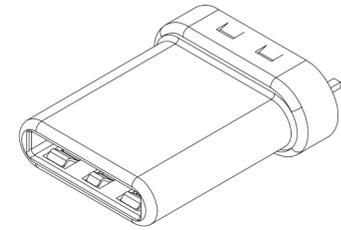

NOTES:

- ELECTRICAL:
  - CURRENT RATING: 1.5AMP;
  - INSULATION RESISTANCE: 100MΩMIN;
  - CONTACT RESISTANCE: 30mΩMAX;
  - WITHSTANDING VOLTAGE: 250V AC;
  - OPERATING TEMPERATURE: -30°C TO +85°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
- PART NO.

USCM-24\*N-4BS64

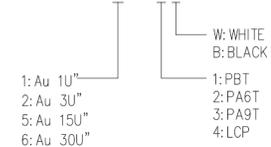

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X.	X.' ±2'	UNITS	mm
5	SHRAPNEL	STAINLESS STEEL	2		X. ±0.35	X.' ±2'		
4	HOOK	STAINLESS STEEL	1	PLATED TIN	.X ±0.3	.X' ±1'		
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XX ±0.25	.XX'	SEE NOTE	
2	TERMINAL	COPPER ALLOY	24	PLATED GOLD/TIN	.XXX ±0.15	.XXX'	SEE NOTE	
1	HOUSING	LCP+30%GF	1	UL94V-0	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			

东莞市腾兴电子有限公司

TITLE: USB A/M 3.1Type-C拉伸式短弯端 组装半成品	PART NO.: USCM-24*N-4BS64
DR: gan 2015/5/12	DWG NO.: All-S64
CHKD: gan 2015/5/12	SCALE SHEET REV. CUSTOMER DRAWING
APPD:	1:1 1/1 B