

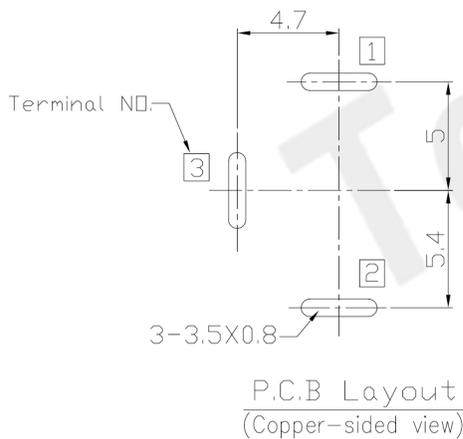
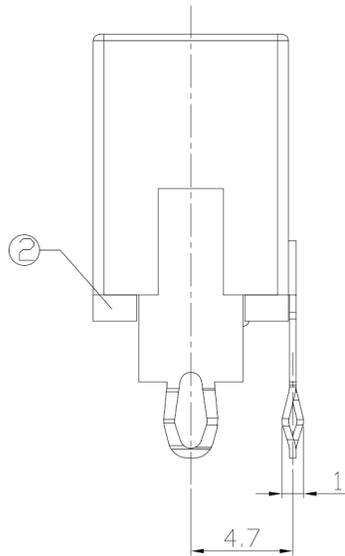
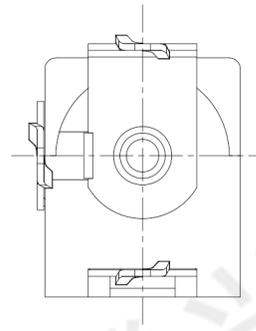


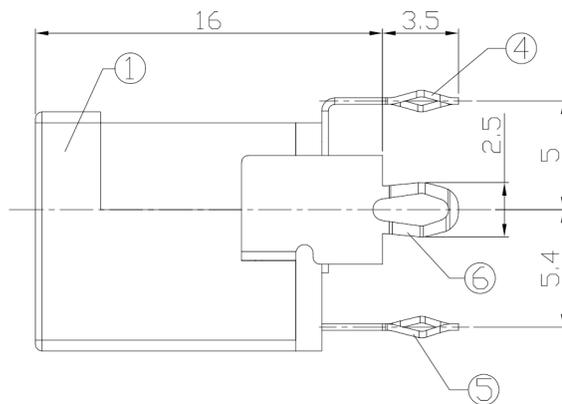

RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

### DIMENSIONS


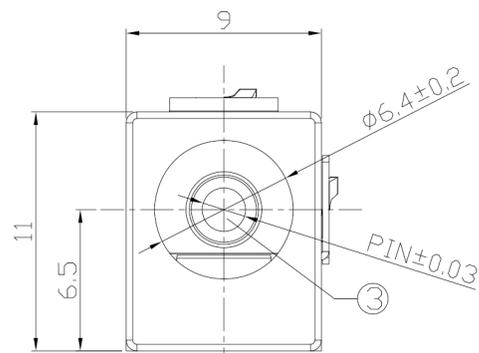


### MODEL CODE:

DCB0-0013C- A □ PB BK I 0 4  
 (1) (2) (3)(4) (5) (6) (7)(8) (9)  
 (1):Series type:DIP DC POWER JACK.  
 (2):Series No.  
 (3):Schematic option: A , B  
 (4):Center pin diameter:  
 H=φ2.0 , I=φ2.35 , J=φ2.5  
 (5):Material of housing:  
 PB=PBT (Standard)  
 (6):Housing color:  
 BK=Black , 9C=White  
 (7):Terminal plating  
 T=Tin(Sn)  
 (8):Special option:  
 0=No special opion  
 (9):Packing mode:  
 4=Bag packing

### SPECIFICATION:

- 1.Rating : DC 12V 3A;
- 2.Contact resistance:  $\leq 30m\Omega$ ;
- 3.Insulation resistance:  $\geq 100M\Omega$  (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-30N;
- 6.life test: 5,000 cycles;
- 7.Operation temperature range:-20°C~70°C;
- 8.Preservative temperature range:-40°C~85°C;

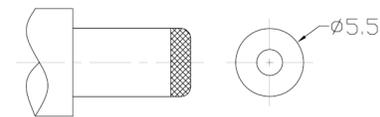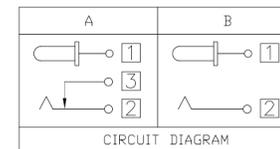

Model No.	H	I	J
CENTER PIN	φ2.0	φ2.35	φ2.5

○: ITEM NO. □: TERMINAL NO.

NO.	PARTS	MATERIAL	Q'TY	FINISHING
⑥	Shunt terminal ③	Brass t=0.3	1	Tin Plating
⑤	Tip spring ②	Phosphor bronze t=0.3	1	Tin Plating
④	Center pin terminal ①	Brass t=0.3	1	Tin Plating
③	Center pin ①	Brass	1	Nickel plating
②	Cover	PF	1	
①	Housing	PBT UL-94V-0	1	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

TOLERANCE	ANGLES	UNITS	东莞市腾兴电子有限公司			
±0.3	±2°	mm				
		MAT'L				
		SEE NOTE	TITLE: DIP DC POWER JACK		PART NO.: DCB0-0013C	
		FINISH	DR: Ricky 2019/04/09		DWG NO.: AB0-0013C	
		SEE NOTE	CHKD: Ricky 2019/04/09			
		Q'TY	APPD:		SCALE	SHEET
					1:1	1/1
					REV.	CUSTOMER DRAWING
					A	