



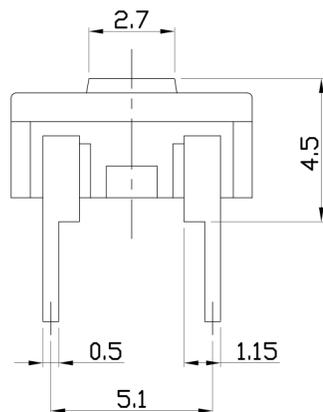


**RoHS Compliant**  
2002/95/EC

REV.	ECN. NO.	APPD.

### DIMENSIONS

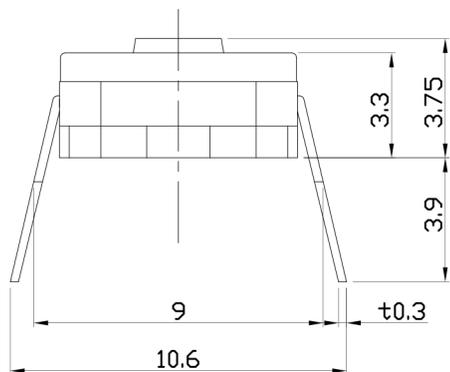

### CIRCUIT DIAGRAM





### PRODUCT IMAGE



### P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

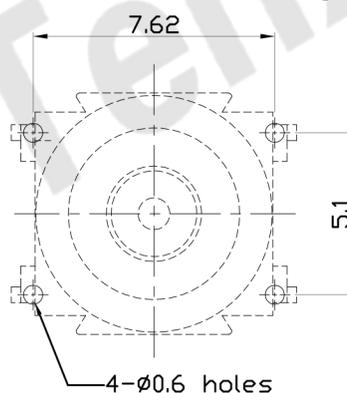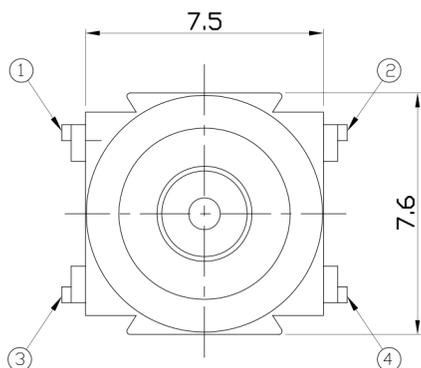

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 0.1A	
Contact Resistance	100mΩ Max.	
Insulation Resistance	100MΩ (DC 500V / 1 min) Min.	
Withstanding Voltage	250 VAC / min.	
Travel	0.45 ± 0.15mm	
Operating Force	300±80gf	160±50gf
Operating Life(cycles)	100,000	

.X ±0.3	X. ±2'	UNITS mm
		MAT'L SEE NOTE
		FINISH SEE NOTE
		Q'TY
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		

### 东莞市腾兴电子有限公司

TITLE: TACT SWITCH Soft feeling	PART NO.: AT-1155 SERIES
DR: Ricky 2014/04/01	DWG NO.: ASI-1155
CHKD: Ricky 2014/04/01	SCALE SHEET REV. CUSTOMER DRAWING
APPD:	1:1 1/1 A