





RoHS Compliant
2002/95/EC

REV.	ECN. NO.	APPD.


DIMENSIONS

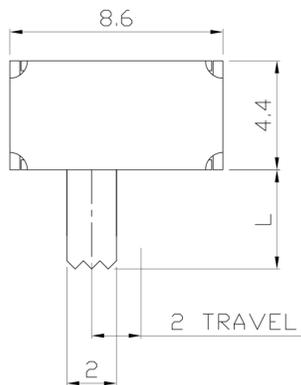


MODEL CODE

SK-12D20-GFB



Knob Type	L(mm)
GFB	~
VAC	



P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

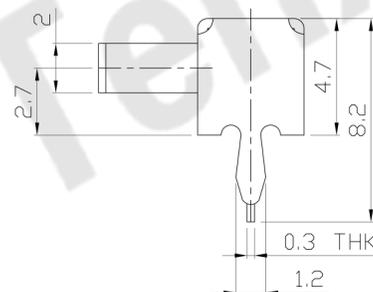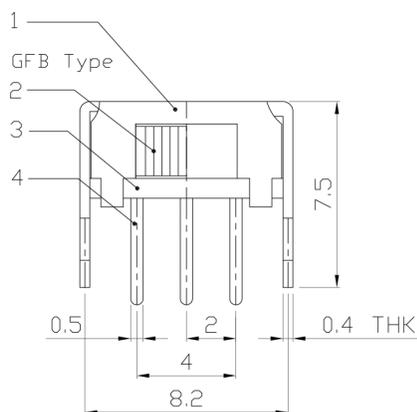

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

NO.	PARTS	MATERIAL	Q'TY	FINISHING
8				
7				
6	SPRING PLATE	STAINLESS STEEL	1	NATURAL
5	CONTACT CLIP	PBS C5210R-EH	1	Ag CLAD
4	TERMINAL	BRASS STRIP	3	Ag PLATED OVER Ni PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	KNOB	POM	1	BLACK
1	FRAME	STEEL STRIP	1	Ni PLATED

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATION INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATION INC.

WITHIN 1.5mm: ±0.1mm	UNITS	mm	东莞市腾兴电子有限公司							
OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE								
	FINISH	SEE NOTE	TITLE:	SLIDE SWITCH / HORIZONTAL			PART NO.:	SK-12D20		
	Q'TY		DR:	Ricky 2015/12/03			DWG NO.:	ADJ-12D20		
			CHKD:	Ricky 2015/12/03			SCALE	SHEET	REV.	CUSTOMER DRAWING
			APPD:				4:1	1/1	A	