

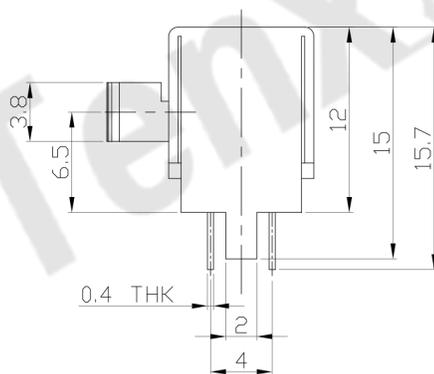


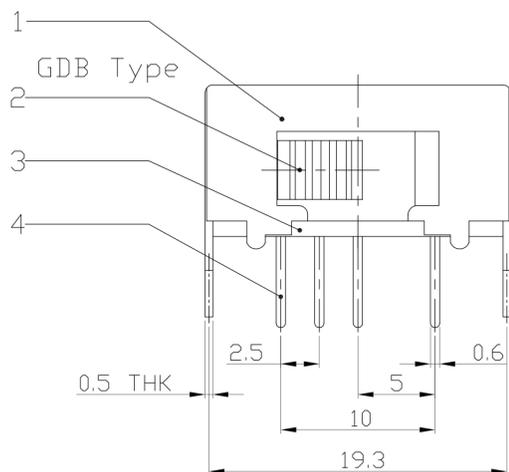

RoHS Compliant
2002/95/EC

REV.	ECN. NO.	APPD.



DIMENSIONS

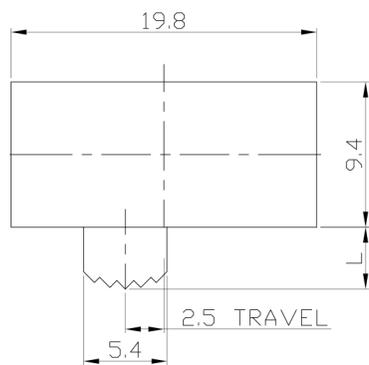

MODEL CODE

SK-23E01- GDB

Knob Type	L(mm)
GDB	~

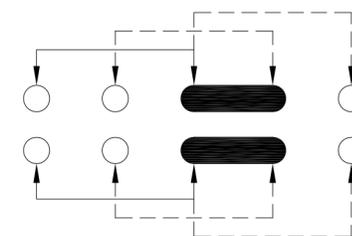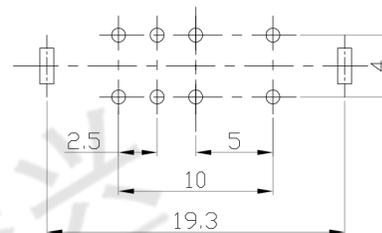

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2.5mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000

NO.	PARTS	MATERIAL	Q'TY	FINISHING	UNITS
8					WITHIN 1.5mm: ±0.1mm
7	STEEL BALL	STEEL	1	NATURAL	OVER 1.5mm: ±0.2mm
6	SPRING	STEEL WIRE	1	NATURAL	
5	CONTACT CLIP	PBS C5210R-EH	2	Ag PLATED	
4	TERMINAL	BRASS STRIP	8	Ag PLATED	
3	BASE	PHENOLIC RESIN	1	NATURAL	
2	KNOB	POM	1	BLACK	
1	FRAME	STEEL STRIP	1	Ni PLATED	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.

东莞市腾兴电子有限公司			
TITLE:	SLIDE SWITCH / HORIZONTAL	PART NO.:	SK-23E01
DR:	Ricky 2016/07/13	DWG NO.:	ADL-23E01
CHKD:	Ricky 2016/07/13	SCALE	2:1
APPD:		SHEET	1/1
		REV.	A
		CUSTOMER DRAWING	