







RoHS Compliant  
2002/95/EC

### MODEL CODE

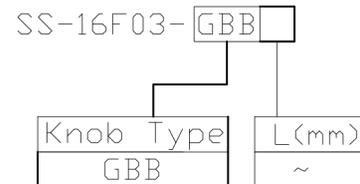


REV.	ECN. NO.	APPD.

### DIMENSIONS

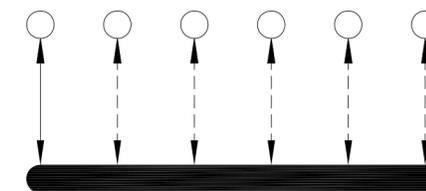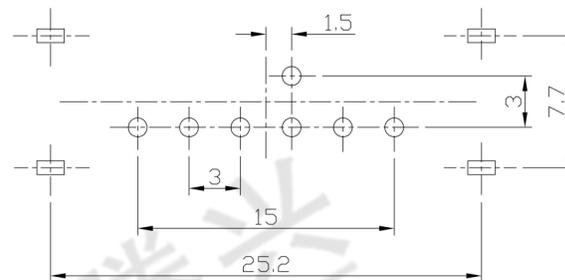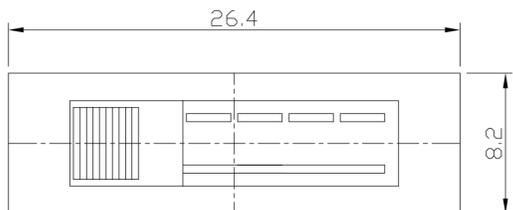

P.C.B LAYOUT  
BOTTOM VIEW

CIRCUIT DIAGRAM

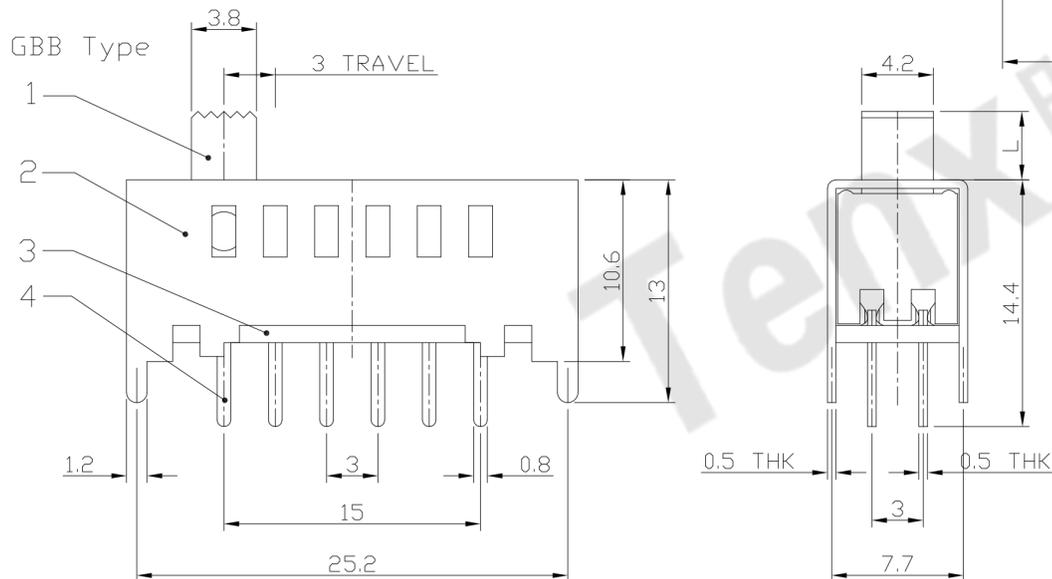

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	1P6T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	3mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm
7	CONTACT CLIP	BRASS STEEL	1	Ag PLATED	OVER 1.5mm: ±0.2mm	MAT'L
6	SPRING	STEEL WIRE	2	NATURAL		SEE NOTE
5	STEEL BALL	STEEL	2	NATURAL		FINISH
4	TERMINAL	BRASS STRIP	7	Ag PLATED		SEE NOTE
3	BASE	PHENOLIC RESIN	1	NATURAL		Q'TY
2	FRAME	STEEL STRIP	1	Zn PLATED		
1	KNOB	POM	1	BLACK		
NO.	PARTS	MATERIAL	Q'TY	FINISHING		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.

**东莞市腾兴电子有限公司**

TITLE: SLIDE SWITCH / VERTICAL	PART NO.: SS-16F03
DR: <i>Ricky</i> 2015/07/15	DWG NO.: ADL-16F03
CHKD: <i>Ricky</i> 2015/07/15	SCALE SHEET REV. CUSTOMER 2:1 1/1 A DRAWING
APPD:	