

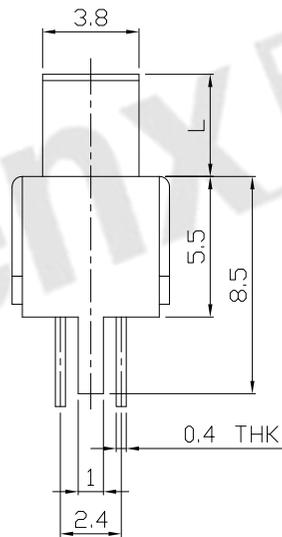


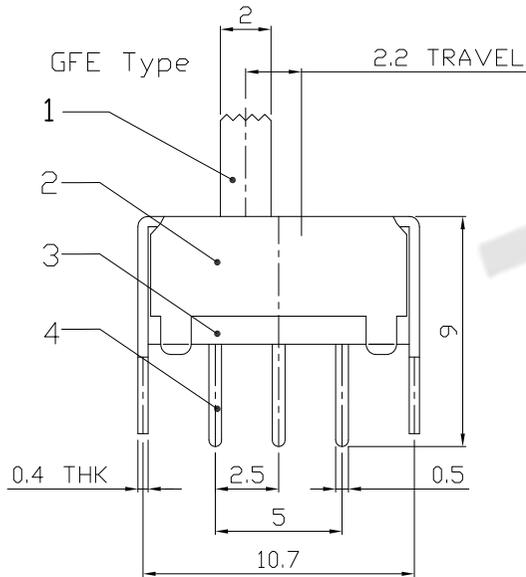



RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS



MODEL CODE

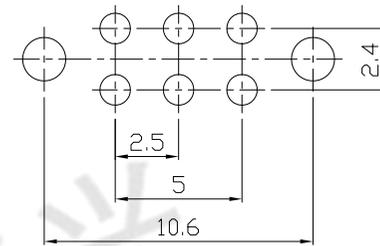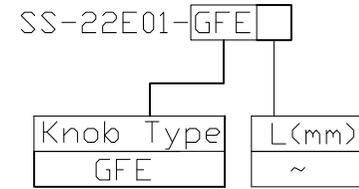

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	东莞市腾兴电子有限公司					
7					OVER 1.5mm: ±0.2mm	MAT'L							
6	SPRING	STEEL WIRE	2	NATURAL		SEE NOTE		TITLE:	SLIDE SWITCH / VERTICAL			PART NO.:	SS-22E01
5	CONTACT	BRASS STRIP	2	Ag PLATED				DR:	Ricky 2015/09/01			DWG NO.:	ADL-22E01
4	TERMINAL	BRASS STRIP	6	Ag PLATED				CHKD:	Ricky 2015/09/01			SCALE	3:1
3	BASE	PHENOLIC RESIN	1	NATURAL				APPD:				SHEET	1/1
2	FRAME	STEEL STRIP	1	Ni PLATED								REV.	A
1	KNOB	POM	1	BLACK								CUSTOMER	DRAWING
NO.	PARTS	MATERIAL	Q'TY	FINISHING									

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

