



RoHS
Compliant
2002/95/EC

MODEL CODE





SS-23D01- GBF

Knob Type
GBF
VAI

L(mm)
~



REV.	ECN.	NO.	APPD.

DIMENSIONS

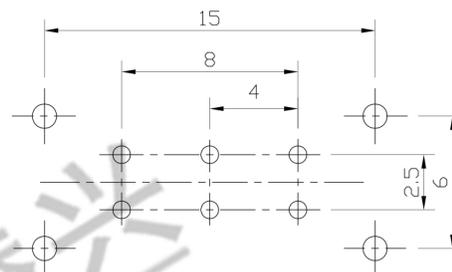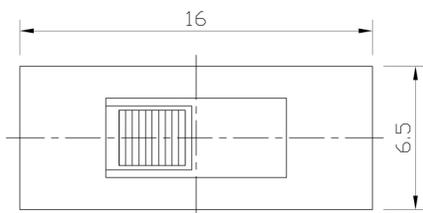

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

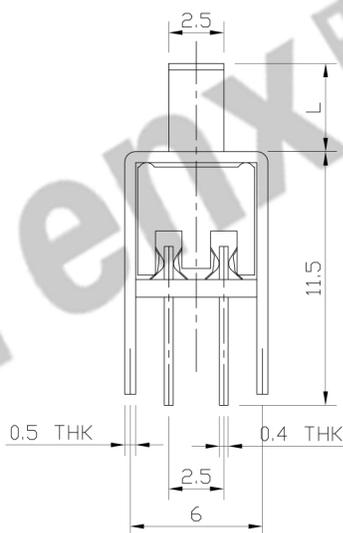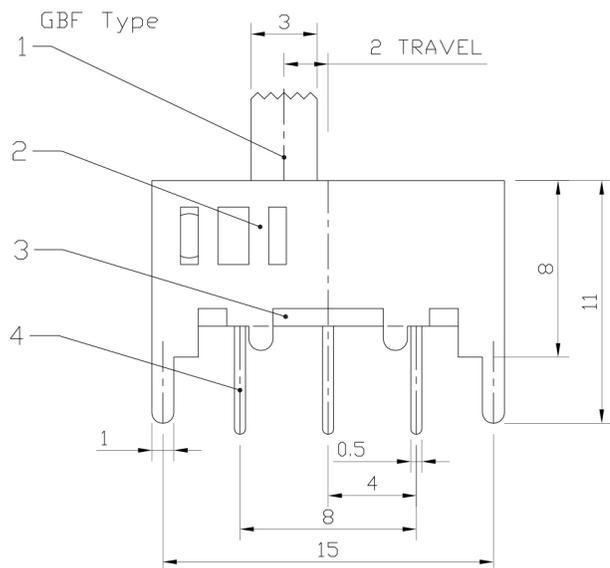

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	东莞市腾兴电子有限公司			
7	STEEL BALL	STEEL	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L					
6	SPRING	STEEL WIRE	1	NATURAL		SEE NOTE					
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED		FINISH					
4	TERMINAL	BRASS STRIP	6	Ag PLATED		SEE NOTE					
3	BASE	PHENOLIC RESIN	1	NATURAL		Q'TY					
2	FRAME	STEEL STRIP	1	Ni PLATED							
1	KNOB	PDM	1	BLACK							
NO.	PARTS	MATERIAL	Q'TY	FINISHING				SCALE	SHEET	REV.	CUSTOMER DRAWING
								3:1	1/1	A	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATION INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATION INC.

