

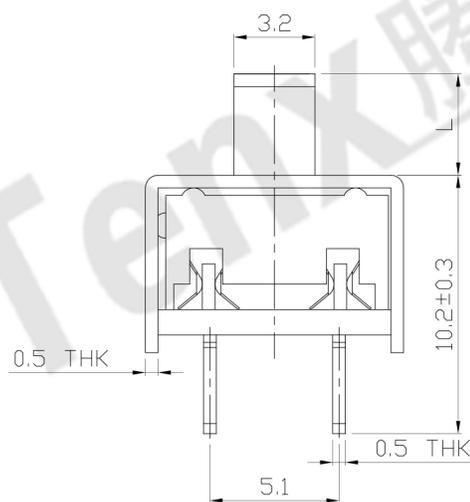


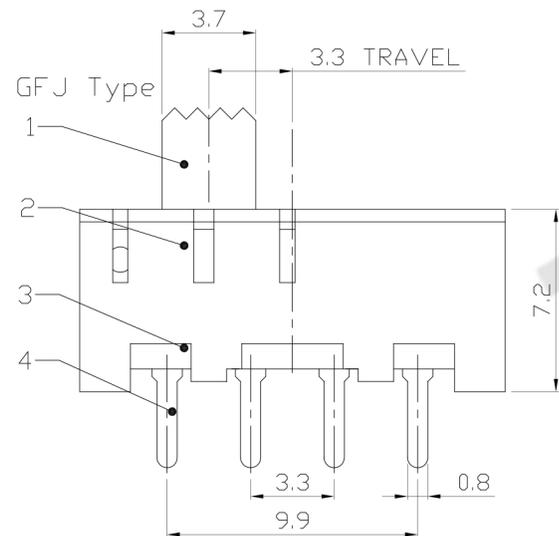



**RoHS Compliant**  
2002/95/EC

REV.	ECN.	NO.	APPD.


### DIMENSIONS

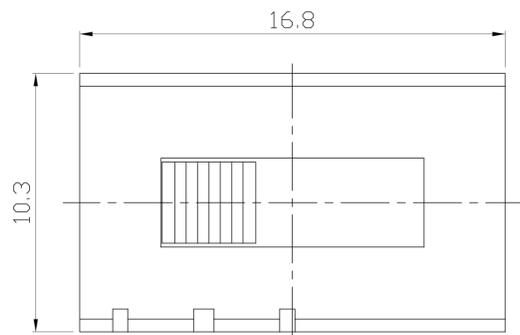

### MODEL CODE

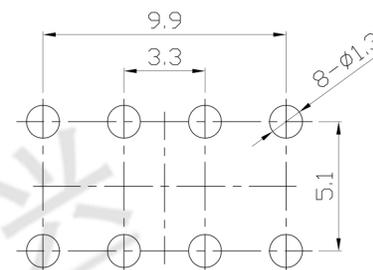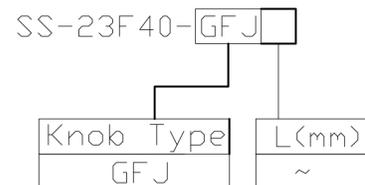

P.C.B LAYOUT  
BOTTOM VIEW



CIRCUIT DIAGRAM

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.3mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm
7	STEEL BALL	SUS	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L
6	SPRING	SUS	1	NATURAL		SEE NOTE
5	CONTACT CLIP	PBS	2	Ag CLAD		FINISH
4	TERMINAL	BRASS	2	Ag PLATED		SEE NOTE
3	BASE	PHENOLIC RESIN	1	NATURAL		Q'TY
2	FRAME	STEEL SHEET	1	Ni PLATED		
1	KNOB	PA66	1	BLACK		
NO.	PARTS	MATERIAL	Q'TY	FINISHING		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.



**东莞市腾兴电子有限公司**

TITLE:	SLIDE SWITCH / VERTICAL	PART NO.:	SS-23F40
DR:	Ricky 2016/02/17	DWG NO.:	ADL-23F40
CHKD:	Ricky 2016/02/17	SCALE	SHEET
APPD:		3:1	1/1
		REV.	A
		CUSTOMER DRAWING	