





**RoHS Compliant**  
2002/95/EC

**MODEL CODE**



SS-24H03- GDB

REV.	ECN. NO.	APPD.

**DIMENSIONS**

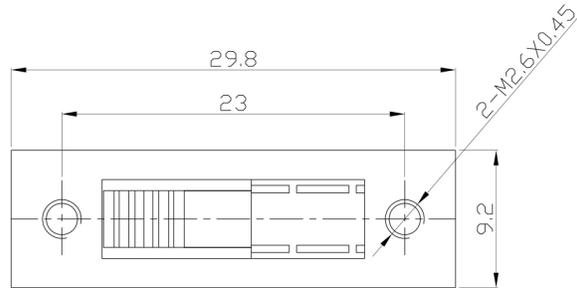



Knob Type	L(mm)
GDB	~
NTA	

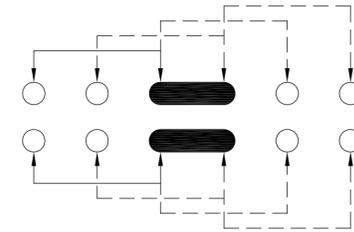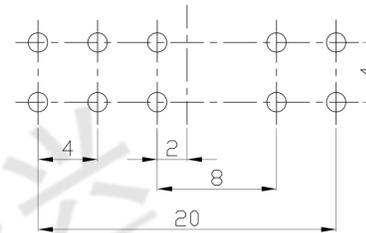

P.C.B LAYOUT  
BOTTOM VIEW

CIRCUIT DIAGRAM

**GDB Type**

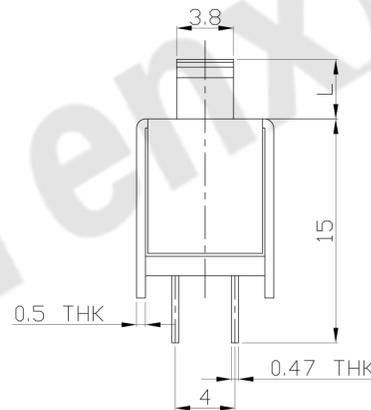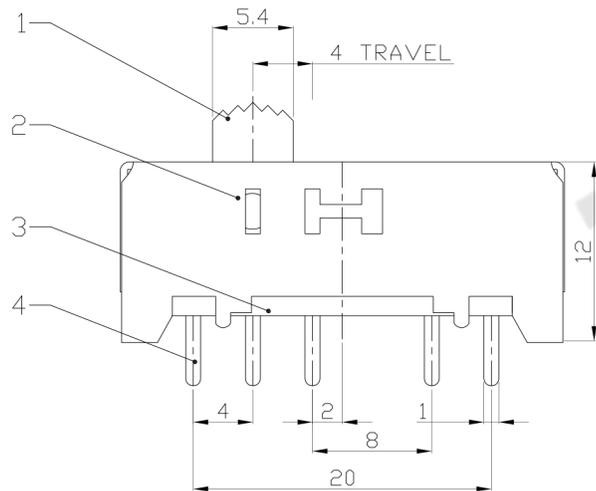

**ELECTRO-MECHANICAL CHARACTERISTICS**

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P4T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	4mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm
7	CONTACT CLIP	PBS STRIP	2	Ag PLATED	OVER 1.5mm: ±0.2mm	MAT'L
6	SPRING	STEEL WIRE	1	NATURAL		SEE NOTE
5	STEEL BALL	STEEL	2	NATURAL		FINISH
4	TERMINAL	BRASS STRIP	10	Ag PLATED		SEE NOTE
3	BASE	PHENOLIC RESIN	1	NATURAL		Q'TY
2	FRAME	STEEL STRIP	1	Ni PLATED		
1	KNOB	PDM	1	BLACK		
NO.	PARTS	MATERIAL	Q'TY	FINISHING		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.



**东莞市腾兴电子有限公司**

TITLE:	SLIDE SWITCH / VERTICAL	PART NO.:	SS-24H03
DR:	Ricky 2015/10/20	DWG NO.:	ADL-24H03
CHKD:	Ricky 2015/10/20	SCALE	SHEET
APPD:		2:1	1/1
		REV.	A
		CUSTOMER DRAWING	