

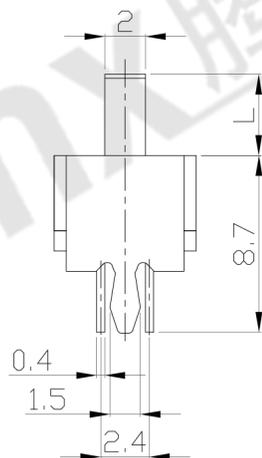


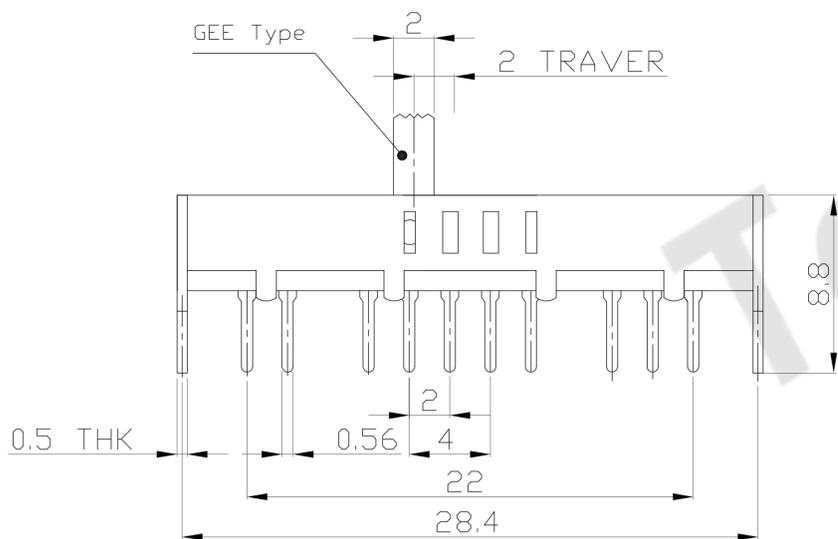




RoHS Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

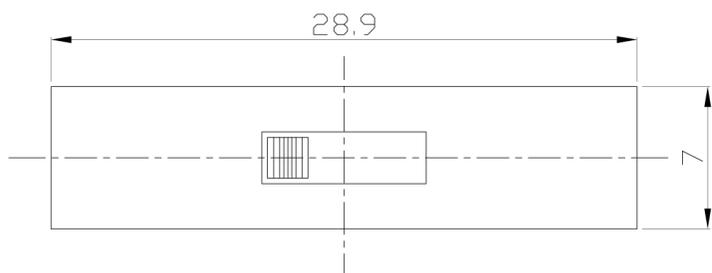

MODEL CODE

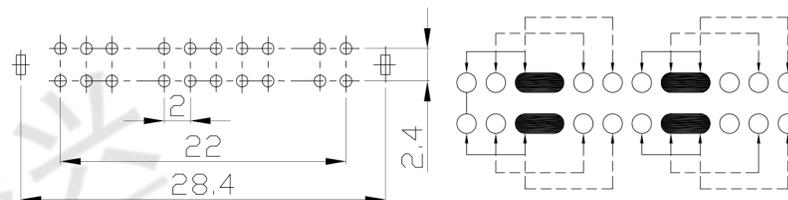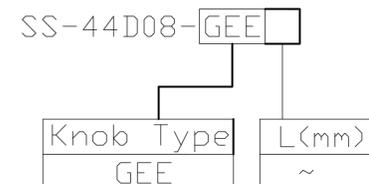

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	4P4T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	350±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	东莞市腾兴电子有限公司 TITLE: SLIDE SWITCH / VERTICAL PART NO.: SS-44D08 DR: Ricky 2016/02/18 DWG NO.: ADL-44D08 CHKD: Ricky 2016/02/18 APPD: SCALE SHEET REV. CUSTOMER 2:1 1/1 A DRAWING
7					OVER 1.5mm: ±0.2mm	MAT'L		
6	SPRING PLATE	PBS STRIP	2	NATURAL		SEE NOTE		
5	CONTACT CLIP	PBS C5210R-EH	6	Ag CLAD				
4	TERMINAL	BRASS STRIP	20	Ag PLATED				
3	BASE	PHENOLIC RESIN	1	NATURAL		FINISH		
2	FRAME	STEEL STRIP	1	Ni PLATED		SEE NOTE		
1	KNOB	POM	1	BLACK		Q'TY		
NO.	PARTS	MATERIAL	Q'TY	FINISHING				

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.

