





RoHS Compliant
2002/95/EC

PART NO:

HRM-□□-□□

REV.	ECN.	NO.	APPD.

DIMENSION:(UNIT:mm/inches)

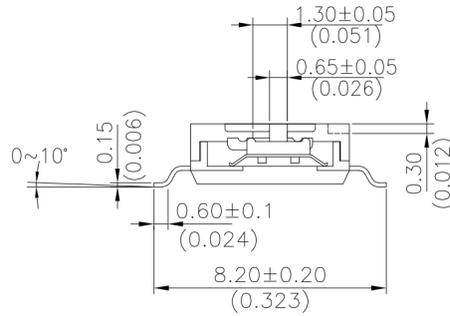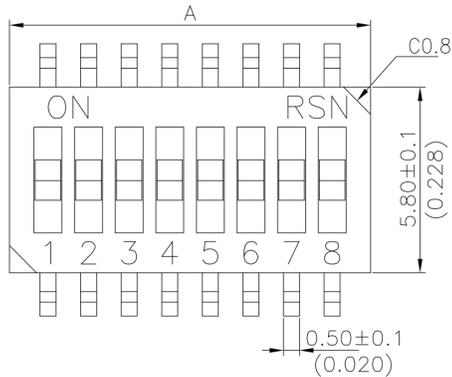

Number of positions:

Package:



□ = Tube

□R = Tape&Reel

Seal:


□T = Top Tape Sealed

Prod No.	No.ofPOS	DIM.A	DIM.B
HRM-02	02	3.68(0.145)	1.27(0.050)
HRM-04	04	6.22(0.245)	3.81(0.150)
HRM-06	06	8.76(0.345)	6.35(0.250)
HRM-08	08	11.30(0.445)	8.89(0.350)
HRM-10	10	13.84(0.545)	11.43(0.450)

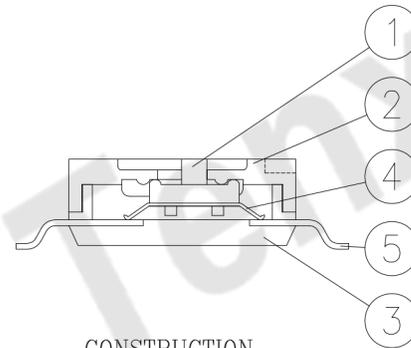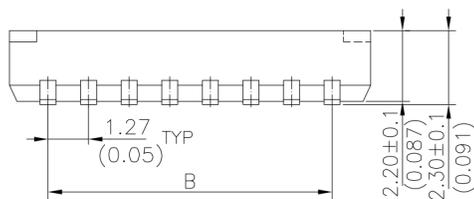


CONSTRUCTION

ITEM	DES	MATERIALS	TREATMENT
1	ACTUATOR	UL94V-0 NYLON THERMOPLASTIC	MOLDED WHITE
2	COVER	UL94V-0 NYLON THERMOPLASTIC	MOLDED BLACK
3	BASE	UL94V-0 NYLON THERMOPLASTIC	MOLDED BLACK
4	CONTACT	COPPER	GOLD PLATED
5	TERMINAL	BRASS	GOLD PLATED

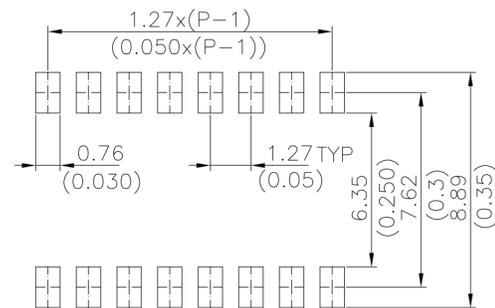

P.C.B. LAYOUT



CIRCUIT DIAGRAM

尺寸範圍	容許值	UNITS mm(IN)	东莞市腾兴电子有限公司			
0-4	±0.05	MAT'L				
4-16	±0.1	SEE NOTE	TITLE: HALF PITCH TYPE DIP SWITCH	PART NO.: HRM SERIES		
16-50	±0.15	FINISH	DR: Ricky 2014/04/08	DWG NO.: ATR-HRM		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY	CHKD: Ricky 2014/04/08	SCALE SHEET REV. CUSTOMER DRAWING	
			APPD:	1:1 1/1 A		