


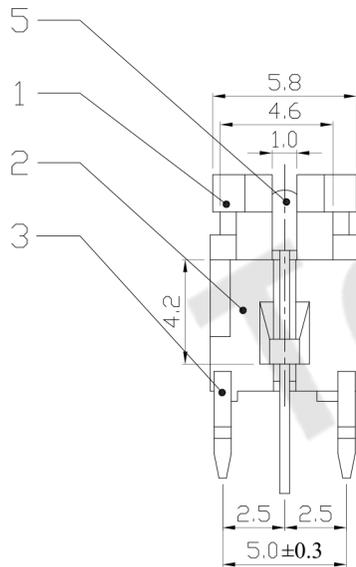


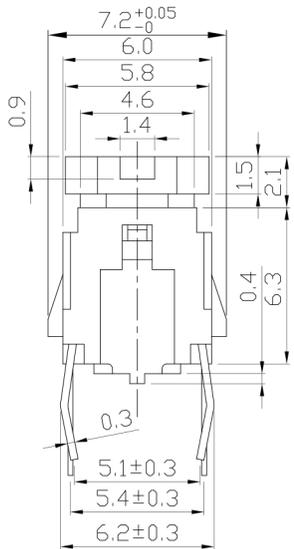


RoHS Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS



CIRCUIT DIAGRAM

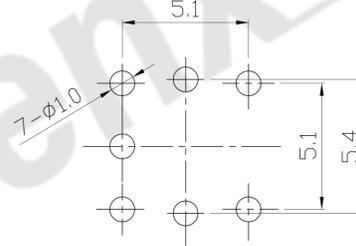

P.C.B LAYOUT
TOP VIEW

MODEL CODE

ATI-002-DW16-1DN**-BS
1 2 3 4 5 6 7 8 9

1. Series Number
2. Terminal Type: D=Dip
3. Stem Color: W=White B=Black
4. Operating Force: 16=160gf 25=250gf
5. Circuit
6. LED Type: D=Dip
7. LED Brightness: N=Normal S=Super Bright H=Super High Bright
8. LED Color: 01=Red 02=Yellow 03=Green 04=Blue 05=White 06=Pure Green 08=Amber 09=Blue Green 0A=Pink 0B=Purple
9. Packing Type: BS=Blister Packing

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC 12V 50mA
CONTACT RESISTANCE	100mΩ MAX.
TRAVEL	0.25±0.1mm
OPERATING FORCE	160±50gf 250±50gf
OPERATING LIFE(cycles)	100,000

8					
7					
6					
5	LED		1		
4	CONTACT	PBS C5210R-EH	1	Ag CLAD	
3	TERMINAL	BRASS STRIP	4	Ag PLATED	
2	CASE	NYLON+F.G	1	BLACK	
1	KNOB	NYLON+F.G	1	NATURAL/BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

WITHIN 1.5mm: ±0.1mm
OVER 1.5mm: ±0.2mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATIVE INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATIVE INC.

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	

东莞市腾兴电子有限公司			
TITLE:	ILLUMINATED TACT SWITCH	PART NO.:	ATI-002-D
DR:	Ricky 2016/10/04	DWG NO.:	AZJ-002-D
CHKD:	Ricky 2016/10/04	SCALE	SHEET
APPD:		4:1	1/1
		REV.:	A
		CUSTOMER DRAWING	