




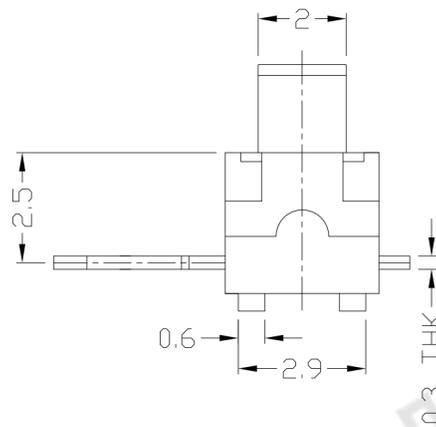

RoHS Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

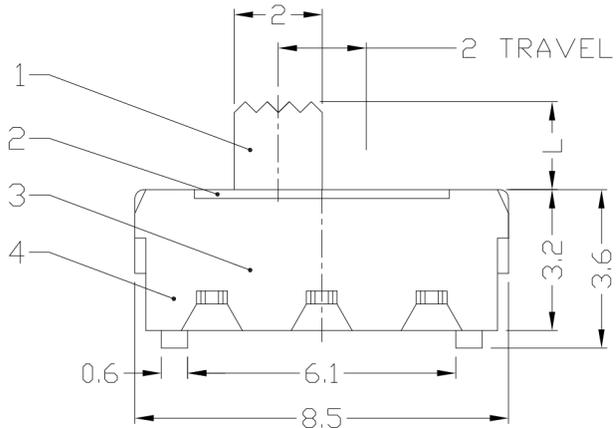



CIRCUIT DIAGRAM

MODEL CODE

AS-1260-B

L	(mm)
-	2.0
A	2.5
B	3.0
C	4.0
D	4.5

Knob Color	
B	Black

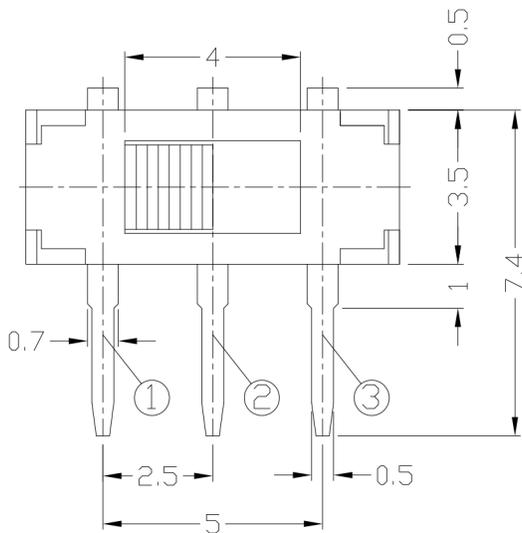

P.C.B LAYOUT
BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC6V 0.3A
CIRCUIT	1P2T
CONTACT RESISTANCE	70mΩ MAX.
TRAVEL	2mm
OPERATING FORCE	150±50gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm:±0.1mm	UNITS mm	东莞市腾兴电子有限公司			
7					OVER 1.5mm:±0.2mm	MAT'L				
6						SEE NOTE	TITLE:	PART NO.:		
5							MINI SLIDE SWITCH / HORIZONTAL	AS-1260 SERIES		
4	CASE	PA66/BRASS STRIP	1	BLACK/Ag PLATED		FINISH	DR:	Ricky 2015/04/09	DWG NO.:	
3	CONTACT	BRASS WIRE	1	Au PLATED		SEE NOTE	CHKD:	Ricky 2015/04/09	ADL-1260	
2	COVER	SUS	1	NATURAL	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.	Q'TY	APPD:	SCALE SHEET REV. CUSTOMER		
1	KNOB	PA66	1	BLACK		5:1 1/1 A DRAWING				
NO.	PARTS	MATERIAL	Q'TY	FINISHING						