



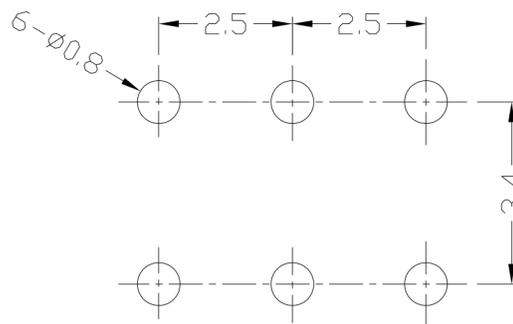


RoHS  
Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.

### DIMENSIONS

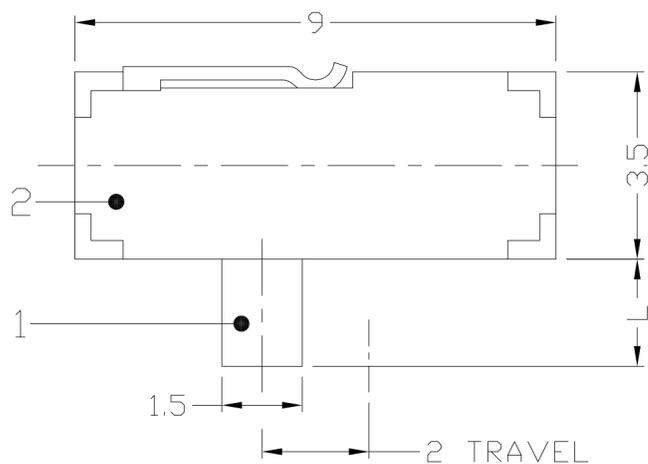

P.C.B LAYOUT  
TOP VIEW


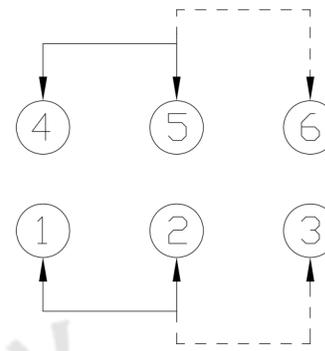


CIRCUIT DIAGRAM

### MODEL CODE

AS-2245 - B

L	(mm)	Knob Color	
-	2.0	B	Black
B	3.0	W	White

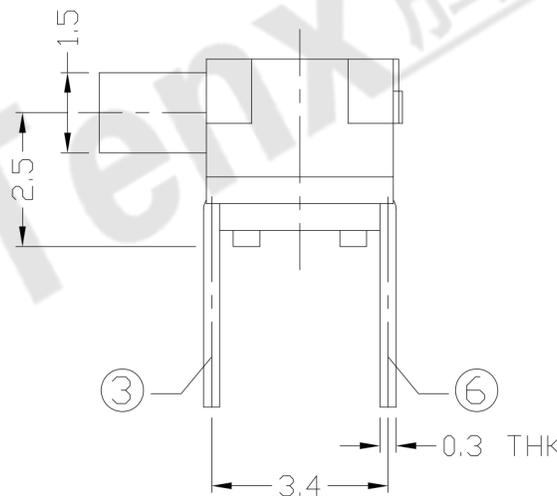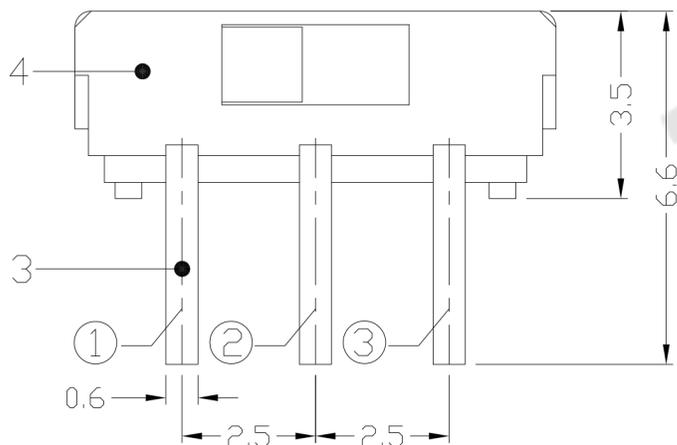

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC6V 0.3A
CIRCUIT	2P2T
TIMING	NON-SHORTING
CONTACT RESISTANCE	100mΩ MAX.
TRAVEL	2mm
OPERATING FORCE	250±150gf
OPERATING LIFE(cycles)	10,000

8					
7					
6					
5	CONTACT	PBS	2	Ag CLAD	
4	CASE	NYLON+F.G/PA6T	1	BLACK	
3	TERMINAL	BRASS STRIP	1	Ag PLATED	
2	COVER	SUS	1	WASHING	
1	KNOB	NYLON+F.G/PA46	1	WHITE/BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

WITHIN 1.5mm:±0.1mm  
OVER 1.5mm:±0.2mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.

UNITS mm  
MAT'L SEE NOTE  
FINISH SEE NOTE  
Q'TY

**东莞市腾兴电子有限公司**

TITLE: MINI SLIDE SWITCH / HORIZONTAL	PART NO.: AS-2245 SERIES
DR: <i>Ricky</i> 2016/12/22	DWG NO.: AZJ-2245
CHKD: <i>Ricky</i> 2016/12/22	SCALE SHEET REV. CUSTOMER 6:1 1/1 A DRAWING
APPD:	