



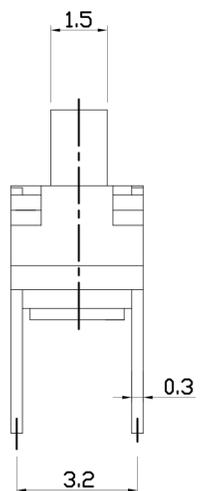


RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.


DIMENSIONS

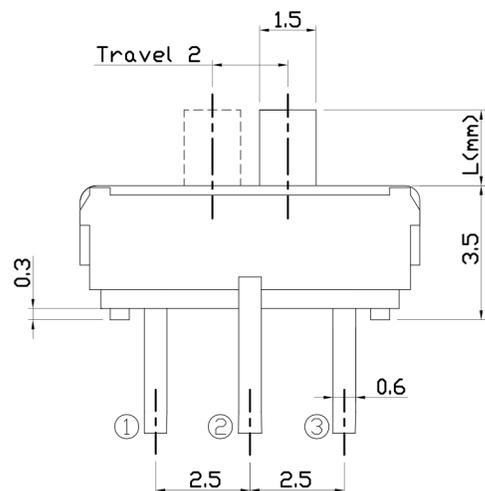

CIRCUIT DIAGRAM



PRODUCT IMAGE



MODEL CODE



AS-1235 - B

L	(mm)
-	2.0
A	4.0
B	3.0

Knob Color	
B	Black
W	White

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

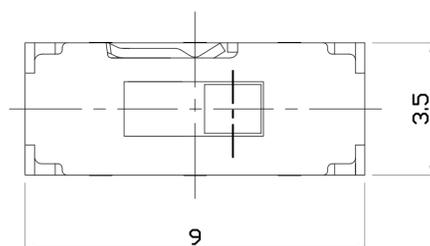

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 6V 0.3A
Circuit	1C-2P
Contact Resistance	70mΩ Max.
Travel	2.0 ± 0.3mm
Operating Force	200±100gf
Operating Life(cycles)	10,000

.X ±0.2	X. ±2'	UNITS mm
		MAT'L SEE NOTE
		FINISH SEE NOTE
		Q'TY
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.</small>		

东莞市腾兴电子有限公司

TITLE: MINI SLIDE SWITCH		PART NO.: AS-1235 SERIES	
DR: Ricky 2014/04/03		DWG NO.: ASI-1235	
CHKD: Ricky 2014/04/03		SCALE	SHEET
APPD:		1:1	1/1
REV.	A	CUSTOMER DRAWING	