

RoHS
COMPLIANT

SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Voltage rating: 100V AC, DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 800V AC/ minute.
6. Contact resistance: 20mΩ/ max.






Material:

Insulator: PA66 UL 94V-0
Contact: Brass
Plating: Tin plated over Nickel
Mate with KR2001 series housing

Ordering Code:

C2001RD *** 01 T01 01PA
 No. of Circuits 102:2,116:16 Plating T01: Tin plated
 Insulator Material 01: PA66 White V0

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2	6.00	2.00	12	26.00	22.00
3	8.00	4.00	13	28.00	24.00
4	10.00	6.00	14	30.00	26.00
5	12.00	8.00	15	32.00	28.00
6	14.00	10.00	16	34.00	30.00
7	16.00	12.00	17	36.00	32.00
8	18.00	14.00	18	38.00	34.00
9	20.00	16.00	19	40.00	36.00
10	22.00	18.00	20	42.00	38.00
11	24.00	20.00			

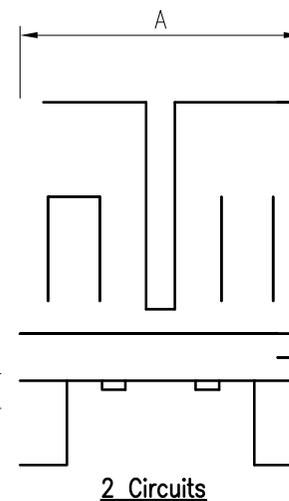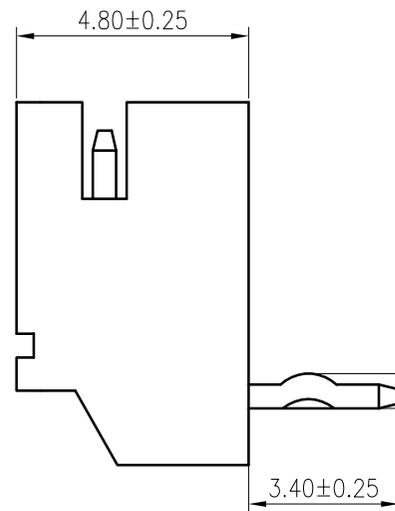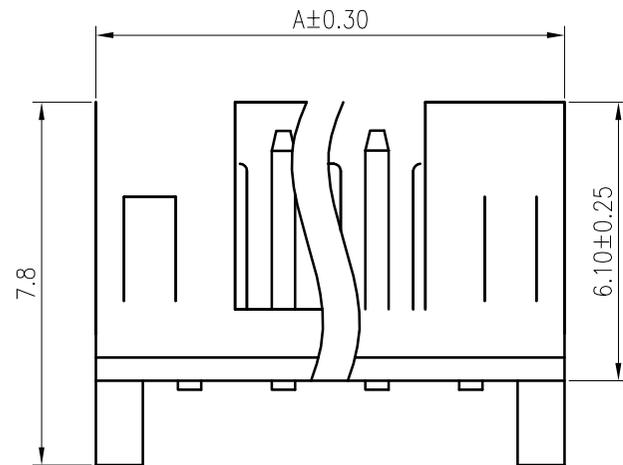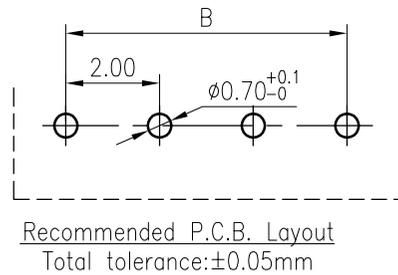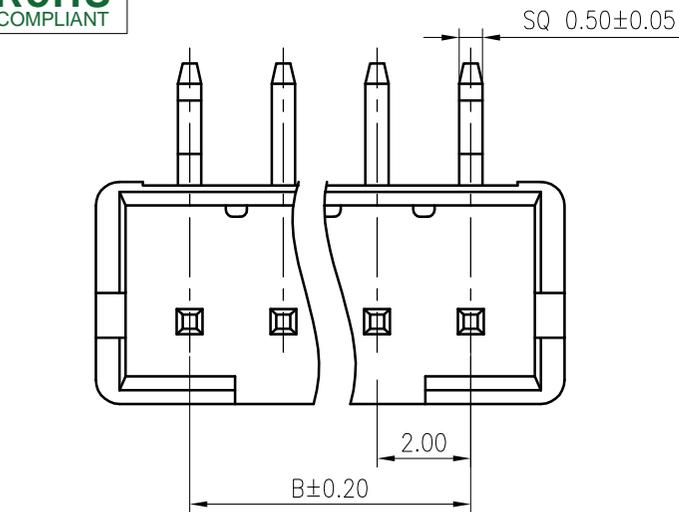

MARK	REVISION DESCRIPTION	SIGNATURE	DATE
△3			
△2			
△1			

TOLERANCE
 X.X ±0.30
 X.XX ±0.20
 X.XXX ±0.10
 Angle ±2°

TITLE:
 PH2.0 DIP 90° Wafer
 打K
UNIT: mm **SCALE:** N/A

DRAWN: Arvin 2020.04.02
CHECKED:
APPROVED:
SHEET: 1/1 **PROJECTION:**

东莞市腾兴电子有限公司

PART NO. : C2001RD*01T0101PA**

VER. : A1 DRAWING NO. : 2001WRD101-A-S