



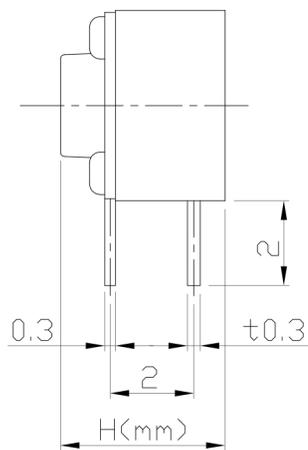

**RoHS Compliant**  
2002/95/EC

REV.	ECN.	NO.	APPD.


**DIMENSIONS**

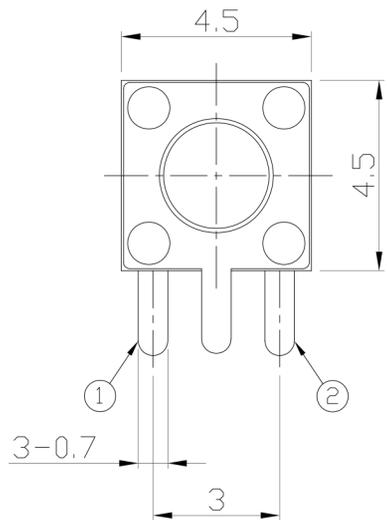

**CIRCUIT DIAGRAM**



**PRODUCT IMAGE**





**MODEL CODE**

AT-1109VP-

	H
-	3.8
B	4.8
C	5.0
A	7.0

**P.C.B MOUNTING PATTERN DIMENSION**

The following soldering patterns are recommended for reflow soldering

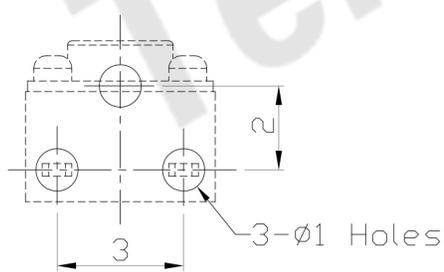

**ELECTRO-MECHANICAL CHARACTERISTICS**

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.2 ± 0.1mm	
Operating Force	160±30gf	250±50gf
Operating Life(cycles)	100,000	

.X ±0.3	X. ±2'	UNITS mm	<b>东莞市腾兴电子有限公司</b>				
		MAT'L SEE NOTE					
		FINISH SEE NOTE	TITLE: TACT SWITCH	PART NO.: AT-1109VP SERIES			
		Q'TY	DR: Ricky 2017/04/06	DWG NO.: ASI-1109VP			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			CHKD: Ricky 2017/04/06	SCALE 1:1	SHEET 1/1	REV. A	CUSTOMER DRAWING
			APPD:				