





RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.


DIMENSIONS

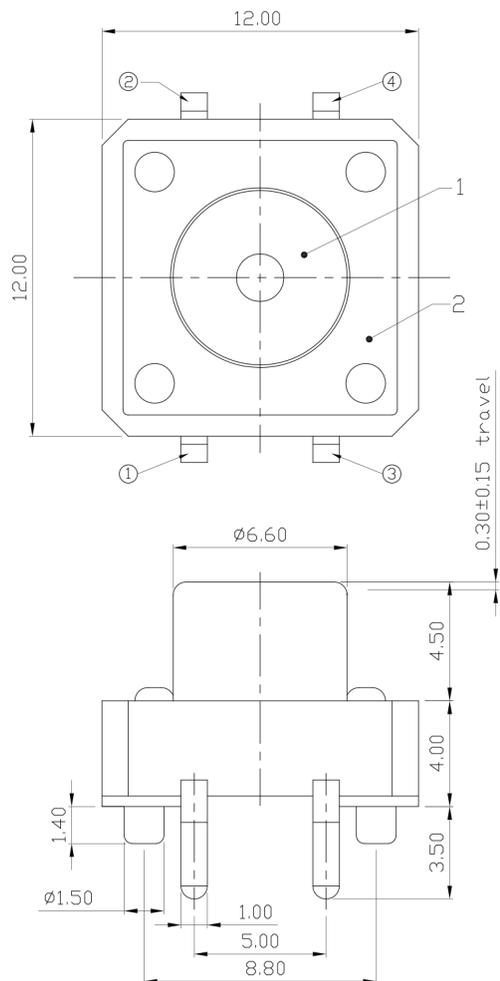

CIRCUIT DIAGRAM



P.C.B MOUNTING PATTERN DIMENSION

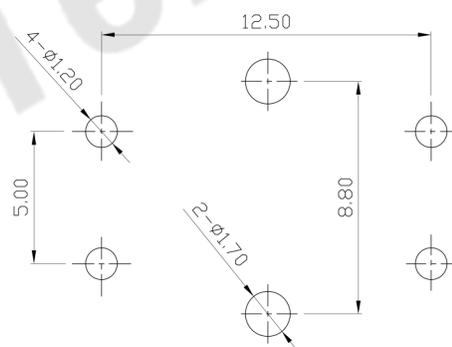

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.30±0.15mm	
Operating Force	160±50gf	250±100gf
Operating Life(cycles)	100,000	

NO.	PARTS	MATERIAL	Q'TY	FINISHING
5	SPRING PLATE	PBS	1	Ag CALD
4	TERMINAL	BRASS STRIP	4	Ag COATING
3	CASE	NYLON+F.G	1	BLACK
2	COVER	MILD STEEL	1	Ni COATING
1	KNOB	NYLON+F.G	1	BLACK

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.

UNITS mm			
OVER 1.5mm:±0.1mm		MAT'L	
WITHIN 1.5mm:±0.2mm		SEE NOTE	
FINISH		TITLE:	
SEE NOTE		TACT SWITCH	
Q'TY		PART NO.:	
CHKD: Ricky 2017/08/02		AT-1103E-8.5 SERIES	
APPD:		DRG NO.:	
DWG NO.:		AZJ-1103E-8.5	
SCALE	SHEET	REV.	CUSTOMER DRAWING
4:1	1/1	A	

东莞市腾兴电子有限公司