



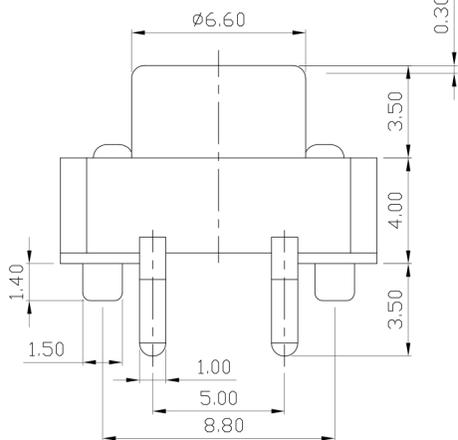


RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.


DIMENSIONS

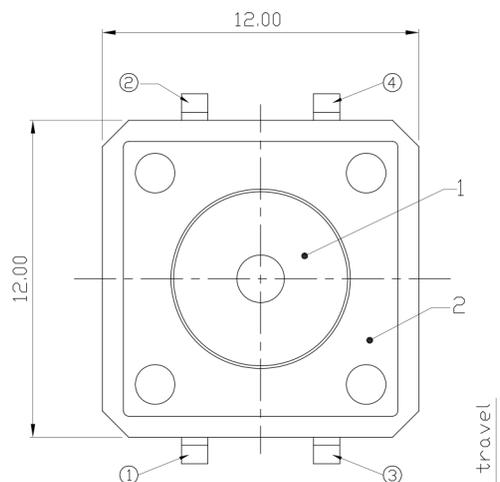

CIRCUIT DIAGRAM



P.C.B MOUNTING PATTERN DIMENSION

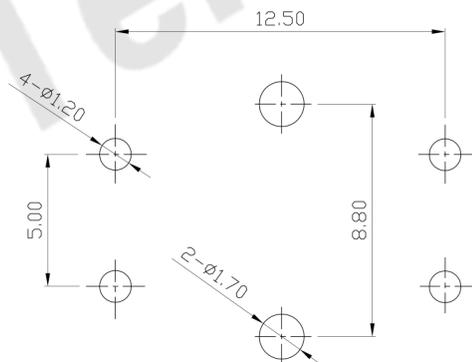

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.30±0.15mm	
Operating Force	160±50gf	250±100gf
Operating Life(cycles)	100,000	

NO.	PARTS	MATERIAL	Q'TY	FINISHING		UNITS		东莞市腾兴电子有限公司			
5	SPRING PLATE	PBS	1	Ag CALD	WITHIN 1.5mm:±0.1mm	mm		TITLE: TACT SWITCH		PART NO.: AT-1103EB SERIES	
4	TERMINAL	BRASS STRIP	4	Ag COATING	OVER 1.5mm:±0.2mm	MAT'L		DR: Ricky 2017/08/02		DWG NO.: AZJ-1103EB	
3	CASE	NYLON+F.G	1	BLACK		SEE NOTE		CHKD: Ricky 2017/08/02		SCALE	SHEET
2	COVER	MILD STEEL	1	Ni COATING		FINISH		APPD:		4:1	1/1
1	KNOB	NYLON+F.G	1	BLACK		SEE NOTE				REV.	CUSTOMER
						Q'TY				A	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.

