




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

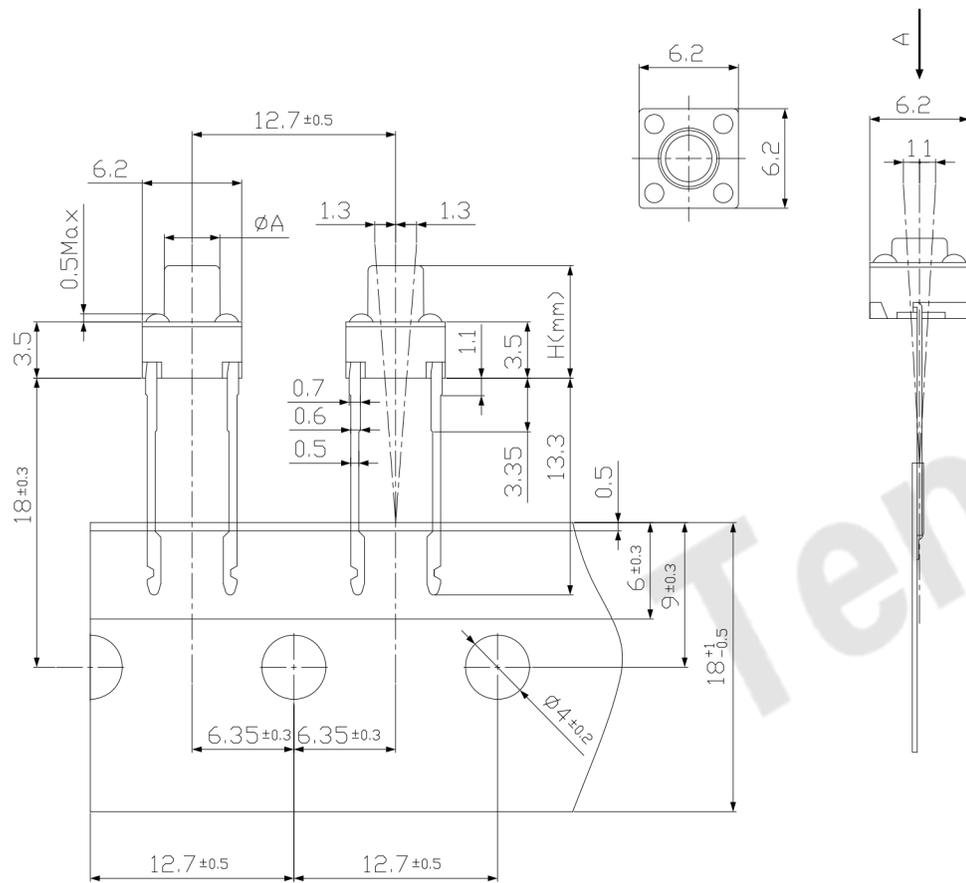

CIRCUIT DIAGRAM



PRODUCT IMAGE




MODEL CODE

AT-1104RT-

	H	φA
-	4.3	3.4
AS	4.5	3.4
A	5.0	3.4
AL	5.5	3.3
Q	6.0	3.3
QL	6.5	3.3
B	7.0	3.3
E	7.3	3.3
EL	7.5	3.3
C	8.0	3.3
CL	8.5	3.3
DS	9.0	3.3
D	9.5	3.3
DL	10.0	3.0
KS	10.5	3.0
K	11.0	3.0
KL	11.5	3.0
FS	12.0	3.0
F	12.5	3.0
FL	13.0	3.0
G	13.5	3.0
D	14.0	3.0
X	14.5	3.0
Y	15.0	3.0
Z	16.0	3.0
J	16.5	3.0
I	17.0	3.0

PCB HOLE DETAILS



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.25 ± 0.1mm	
Operating Force	100,130,160±30gf	250±50gf
Operating Life(cycles)	100,000	

.X ±0.3	X. ±2'	UNITS mm
		MAT'L SEE NOTE
		FINISH SEE NOTE
		Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市腾兴电子有限公司			
TITLE: TACT SWITCH		PART NO.: AT-1104RT SERIES	
DR: Ricky 2015/03/18		DWG NO.: ASI-1104RT	
CHKD: Ricky 2015/03/18		SCALE	SHEET
APPD:		1:1	1/1
		REV. A	CUSTOMER DRAWING